


Wise11 WiseMP11

Single Phase 2 Wires Input / Output

ZERO CURRENT AND ZERO VOLTAGE CROSSING AUTOMATIC VOLTAGE STABILIZER

- Microprocessor Control
- Zero current and zero voltage crossing
- Input voltage is 220 Vac (L-N) +15% -20% for Wise11 and +15% -17.5% for Wise MP11
- Output voltage is 220 Vac (L-N) \pm 5% for Wise11 and \pm 2.5% for Wise MP11
- Crest factor ratio 3:1
- LED and digital meter on LCD display
- Surge, spike, sag and brownout protection
- EMI/RFI and power line noise protection
- Overload and short circuit protection
- Over voltage and under voltage protection
- Analog Output Volt meter and Amp meter
- RS-232 for PC communication and remote monitoring (option)

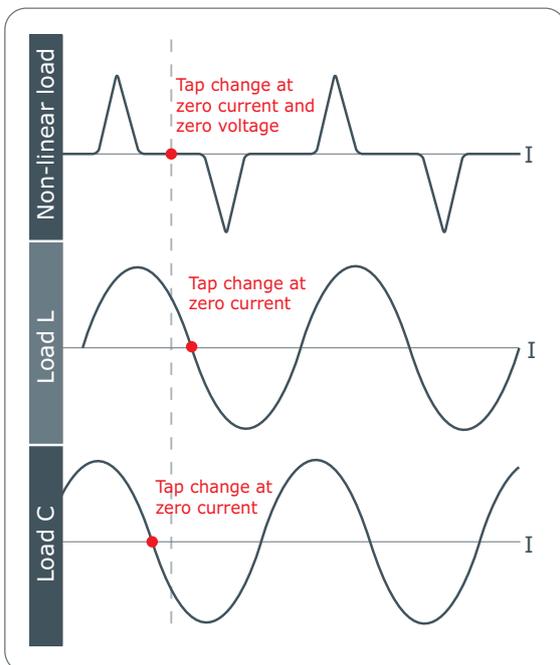

The most reliable topology of Automatic Voltage Stabilizer for full protect electrical equipment such as factory automation equipment, medical and scientific equipment, communication equipments, industrial instruments etc.



Wise11 and Wise MP11

ZERO CURRENT AND ZERO VOLTAGE CROSSING AUTOMATIC VOLTAGE STABILIZER

SPECIFICATIONS

| MODEL | | Wise 0811 | Wise1011 | Wise1511 | Wise2011 | Wise2511 | Wise3011 | Wise4011 | Wise5011 |
|---------------------|---------------------------|--|------------|------------|------------|---|------------|------------|------------|
| | | WiseMP0811 | WiseMP1011 | WiseMP1511 | WiseMP2011 | WiseMP2511 | WiseMP3011 | WiseMP4011 | WiseMP5011 |
| RATED POWER | Pf. = 1 | 8 kVA | 10 kVA | 15 kVA | 20 kVA | 25 kVA | 30 kVA | 40 kVA | 50 kVA |
| | | 8 kW | 10 kW | 15 kW | 20 kW | 25 kW | 30 kW | 40 kW | 50 kW |
| SYSTEM | Topology | Single phase stabilizer with microprocessor controlled | | | | | | | |
| | Number of TAP change | 4 Taps for Wise xx11 8 Taps for Wise MPxx11 | | | | | | | |
| | Crossing Technique | Zero current and zero voltage crossing | | | | | | | |
| INPUT | Voltage | 220 Vac -20% +15% for Wise xx11 220 Vac -17.5% +15% for Wise MPxx11 | | | | | | | |
| | Frequency | 50 / 60 Hz ± 6% (auto sensing) | | | | | | | |
| | Wave form | Pure sine wave | | | | | | | |
| OUTPUT | Voltage | 220 Vac ± 5% for Wise xx11 220 Vac ± 2.5% for Wise MPxx11 | | | | | | | |
| | Frequency | Synchronize with input | | | | | | | |
| | Wave form | Pure sine wave (sinusoidal) | | | | | | | |
| | Total harmonic distortion | Less than 0.2% THD | | | | | | | |
| | Overload capability | 100% for continuous load 150% for 1 min. 1000% for 1 cycle | | | | 100% for continuous load 150% for 1 min. | | | |
| | Crest factor ratio | 3:1 | | | | | | | |
| EFFICIENCY | AC to AC (at full load) | More than 96% | | | | | | | |
| SYSTEM PROTECTION | Overload | Automatic shutdown with manual restart or auto restart (selectable) | | | | | | | |
| | Over/under voltage | Automatic shutdown with manual restart or auto restart (selectable) | | | | | | | |
| | Short circuit | Circuit breaker | | | | | | | |
| | Surge energy dissipation | 400 joules (40 kA) | | | | | | | |
| | Surge clamping voltage | 710 Vp | | | | | | | |
| | Power dissipation | 5,500,000 W within 100 microsec. | | | | | | | |
| | EMI / RFI dissipation | 100 kHz - 80 MHz | | | | | | | |
| | Attenuation | More than 36 dBA | | | | | | | |
| MANUAL CONTROLS | Maintenance bypass switch | yes | | | | | | | |
| INDICATOR | Front panel LED's | AVR, Alarm | | | | | | | |
| | LCD Display | Input voltage, input frequency, output voltage, output current, %load, system status | | | | | | | |
| | Analog Meter | Output voltage, output current | | | | | | | |
| AUDIBLE ALARM | | Overload, over voltage, under voltage | | | | | | | |
| ACOUSTIC NOISE | At 1 metre | Less than 50 dBA | | | | | | | |
| ENVIRONMENT | Temperature | 0°C to 45°C | | | | | | | |
| | Humidity | 0 - 95% (non-condensing) | | | | | | | |
| PHYSICAL DIMENSIONS | W x H x D (cm.) | 32.5 x 74.5 x 64.5 | | | | | | TBA | |
| WEIGHT | Approximate in kg. | 77 | 84 | 94 | 99 | 125 | TBA | | |

Continuous product development is our commitment. In that manner, the above specifications may be changed without prior notice.

Authorized Distributor

LEO POWER SUPPLY CO.,LTD.

27, 4th Floor, Soi Bangna-Trad Rd 34, Bangna Tai, Bangna, Bangkok 10260 THAILAND
Tel. 0-2746-9500, 0-2746-8708 Fax. 0-2746-8712 e-mail : marketing@lpsups.com

Authorized Dealer