

Introduction:

VCL-2145 (VCL-2145-D) is a high-performance, high-reliability GPS / GNSS Primary Reference Clock and IEEE-1588v2 PTP Grandmaster that provides ITU-T G.811 Primary Synchronization Frequency References which are locked to a user selected Satellite source.

The VCL-2145 (VCL-2145-D) Satellite Receiver also has an integrated, high bandwidth NTP Server engine that is capable of handling up to 5000 NTP requests per second. Multiple IRIG-B Outputs are also provided to synchronize local clock (time-of-day) display units to a central timing source with nanosecond accuracy.



Features and Highlights:

- Reliable, Cost-Efficient Reference GPS Receiver
- 50 Channel GNSS, L1 frequency, C/A Code Receiver
- ITU-T G.811 / Stratum 1 compliant (PR) Primary Reference when locked to GPS
- ITU-T G.812 compliant holdover function
- SSM Message format Compliant with ITU-T G.704. Optional GR-378-CORE for SONET Networks
- GPS locked G.703 compliant 1.544Mbits, 2.048Mbits, 2.048 MHz 1 PPS and 1 PPM outputs
- 1/5/10 MHz, 1 PPS, 1 PPM and IRIG-B outputs
- IEEE-1588v2 PTP Grandmaster
- SyncE
- ToD compliant to NMEA 0183 (DB9 Serial Port)
- 4 x 10/100/1000BaseT NTP Ports
- Additional 1 x 10/100 BaseT NTP Port for IPv4 / IPv6 operation
- Leap Second Correction Support
- Concurrent IPv4 and IPv6 Operations
- MD5 authentication for NTP clients
- 802.1Q VLAN support for NTP Ports
- SSH, Telnet, Radius, SNMP V2 MIB, Password Protection
- Available with 1+0 (VCL-2145, without GPS redundancy) and 1+1 (VCL-2145-D, with GPS redundancy) options
- Power Contact and Lightning Protection as per Telcordia GR-1089-CORE.
- Standard RJ45 and BNC connectors for all inputs and outputs
- LCD display with back light.
- **GNSS Options:**
 - GPS, GLONASS, GPS+GLONASS and GPS+GLONASS+SBAS

The VCL-2145 (VCL-2145-D), Primary Reference (PRC) Clock is specifically designed for frequency synchronization of 2G, 3G, HetNet and LTE mobile telecommunications networks as well as backhaul wire-line SDH / SONET and Synchronous Ethernet networks. It may be also used by Railways, Airports (and Air-Traffic Control), Power generation and distribution companies and other Utility companies who not only require highly precise G.811 frequency synchronization locked to a GPS Reference but who also need to provide an accurate time-of-day reference in their networks.

The VCL-2145-D incorporates up to dual (1+1 redundant) GPS receiver engines and dual (1+1 redundant) power supply options for added reliability which are always locked to a user selected satellite (GPS) reference to provide multiple G.811 / Stratum 1 quality frequency and time-of-day (PTP, NTP and IRIG-B) outputs. The VCL-2145 is also equipped highly accurate, low-noise OCXO / Rubidium oscillator which provides a high stability holdover clock that is typical of a Network SSU in the event of loss of GPS signal, or its antenna failure.


Additional Features:

- IEEE - 1588v2 PTP Grandmaster
- High bandwidth NTP Server capable of supporting up to 5000 NTP requests per second
- Redundant AC and DC power supply options

Typical Synchronization Applications:

- Synchronizing Cellular networks like UMTS, GPRS, 3G and LTE
- Power generation and distribution companies and other utility companies
- Wireless and Wireline Telecom synchronization
- Distributing Time (ToD) and Frequency reference for power utilities across all nodes of the network
- Synchronization of Defense Networks
- Synchronizing airports and aviation communications
- Synchronizing railway signaling networks and railway communications
- Synchronizing traffic management
- Broadcasting Network and Broadcast equipment synchronization.

Application Diagram

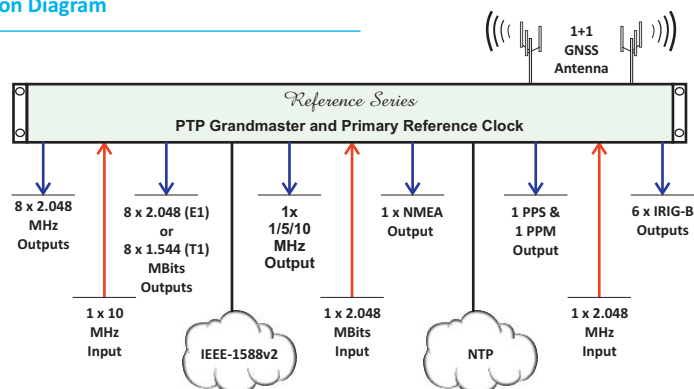

GPS Receiver as a Primary Reference (PRC) Clock with IEEE-1588v2 Grandmaster and NTP Server

Available versions:

Product	Description
VCL-2145D, GPS Primary Reference (PRC) G.811 Clock, PTP 1588v2 Grandmaster and NTP Server (Available with 1+1 and 1+0 GPS receiver option)	May be used in multi-service applications as a G.811, Primary Reference (PRC) Clock and NTP Provides 1PPS, 1PPM, NMEA, 1/5/10MHz, 2.048MHz, 2.048Mbits with SSM, 1.544Mbits outputs Frequency Outputs with High Stability OCXO and Rubidium (G.812) Holdover Clock options. OCXO and Rubidium (G.812) Holdover Clock options are available. Optional: GNSS: GPS, GLONASS, GPS+GLONASS, GPS+SBAS (ISRO-GAGAN)

Technical Specifications

GPS/GNSS Receiver Specifications:

- 50 Channel GPS Receiver
- 72 Channel GNSS Receiver
- GPS L1 frequency, C/A Code Receiver
- Tracks up to 12 satellites in GPS only mode (GPS only version)
- Tracks up to 24 satellites in GNSS mode (GNSS version)
- Synchronizing Time:
 - Acquisition time - Hot Start: 1 sec.
 - Acquisition time - Warm Start: 28 sec.
 - Acquisition time - Cold Start: 28 sec.
- GPS Signal
 - Tracking and Navigation: -162 dBm
 - Reacquisition -160 dBm
 - Cold Start -148 dBm
- Antenna Connector: TNC
- Accuracy Of Time-Pulse Signal referenced to GPS: +/-30ns (raw)
- Accuracy Of Time-Pulse Signal referenced to GNSS: +/-20ns (raw)
- Accuracy Of Time-Pulse Signal referenced to GPS/GNSS: +/-15ns (compensated)
- (Note: with all satellites in view at -130db)

Internal (G.812) Synchronization Options:

- Rubidium Oscillator
- OCXO (Oven-Controlled Crystal Oscillator)

NTP Server:

- NTP Protocols: NTP v2 (RFC 1119), NTP v3 (RFC 1305), NTP v4 (RFC 5905)
- SNTP Protocol: SNTP v3 (RFC 1769), SNTP v4 (RFC 2030)
- IP Protocols: IPV4 - DHCP (RFC 2131), IPV6 - DHCPv6 (RFC 3315)
- Time Protocol: (RFC 868)
- Daytime Protocol: (RFC 867)
- Network Protocol: TCP, UDP
- Synchronization of IEC 61850 compliant devices using NTP / SNTP / IRIG-B, protocol
- Capable of processing up to 5000 requests per second.
- Multiple LAN Support

IEEE-1588 PTP Grandmaster:

- Compliant with IEEE-1588 v2 (2008) specifications
- Profiles supported: Telecom Profile, Power Profile
- Frequency Accuracy: +/- 50ppb referenced to GPS
- SyncE
- Time Accuracy: < 50ns

Management and Monitoring Ports:

- RS-232C Connector
- USB Connector
- 10/100BaseT Ethernet
- 1 x External Alarm Relay Contact

Security and Protection:

- Password Protection
- Secured Access via SSH v1.3, SSH v1.5, SSH v2
- RADIUS

System Access, Control and Management Options:

- Telnet (RFC 854 - RFC 861), FTP, SSH (incl. SFTP, SCP), RADIUS
- HTTP/HTTPS (2616), SYSLOG, SNMP
- CLI Control Interface (HyperTerminal or VT100)
- SNMP v1, SNMP v2c, SNMP v3 Traps (MIB File provided)

Configuration and Monitoring Software:

- CLI, English commands
- GUI (Graphical User Interface) - Windows

Power Supply Options:

- Dual Redundant
- 1+1 DC 24V power
- 1+1 DC -48V power
- 1+1 DC 110/125V DC power
- 1+1 AC power (100 to 240V AC, 50/60 Hz)

MTBF:

MTBF for VCL-2145 with RbXO Option:

- Per MIL-HDBK-217F: ≥ 17 years @ 40°C
- Per Telcordia SSR 332, Issue 1: ≥ 20 years @ 40°C

MTBF for VCL-2145 with OCXO Option:

- Per MIL-HDBK-217F: ≥ 21 years @ 40°C
- Per Telcordia SSR 332, Issue 1: ≥ 24 years @ 40°C
- AC or DC

Power Consumption:

Power Consumption with OCXO Oscillator:

- < 25W during startup,
- < 18W at steady state 23°C

Power Consumption with Rubidium Oscillator:

- < 40W during startup,
- < 32W at steady state 23°C

Standard Frequency and ToD* Outputs:

Output:	Number of Ports	Connector
ITU-T G.811 Complaint 2.048 Mbit/s (E1) / 1.544 Mbit/s (T1)	8 (8E1 or 8T1)	RJ45
ITU-T G.811 Complaint 2.048 MHz, 75 Ohms, phase-locked to GPS	8	BNC
ITU-T G.811 Complaint 1/5/10 MHz, 50 Ohms, phase-locked to GPS	1	BNC
IEEE 1588v2 PTP Grandmaster: 10/100/1000 BaseT	1	RJ45
IRIG-B	6	BNC
1 PPS, phase-locked to UTC	1	BNC
1 PPM, phase-locked to UTC	1	3 Pin
TOD (Time-Of-Day) output compliant to NMEA0183	1	DB9, RS232C
NTP, 10/100/1000 BaseT (Default configuration)	4	RJ45
Optional NTP - 1 Gbps (Optical) + 10/100/1000 BaseT (Electrical)	2+2	SFP+RJ45

*ToD Time Of Day

Environmental characteristics (Equipment):

Operational:	-10°C to +60°C (Typical: +25°C)
Cold start	-0°C
Storage	-20°C to +70°C
Humidity	95% non-condensing

Clock performance - GPS / GNSS:

- Performance when locked to GPS / GNSS
- Timing accuracy: complaint to ITU-T G.811

Frequency Accuracy:

- <1x10⁻¹¹ (24 hour average)
- G.811 quality when locked to GPS / GNSS

Frequency holdover:

OCXO:

- Stability:
- 0.5x10⁻⁹ (0.5 ppb) per day,
- 50x10⁻⁹ (50 ppb) per year
- Frequency stability: 6x10⁻¹⁰ (-5°C to +55°C)

Rubidium:

- Long term stability: ± 5x10⁻¹¹ / month
- Frequency stability: < 1x10⁻¹⁰ (-5°C to +55°C)

Antenna Specifications:

- Antenna Type: Active, Wall Mounting
- Polarization: Right hand circular
- Frequency Band: 1575.42 MHz ± 10 Mhz
- Amplifier Gain: 40dB ± 4dB
- VSWR: <2.0 Max, 1.0 Typical
- Operating temperature: -40C to +85C
- Reverse Polarity Protection
- Out of Band Rejection: ≥ -60dB @ ±50MHz_off center (1575.42 Mhz) frequency
- Lightening Protection: According to EN61000-4-5 Level 4.
- LMR400 (or equivalent) Cable Length - 30, 60, 90, 120 and 150 meters.

External Frequency Synchronization Inputs:

External Inputs	Number of Inputs	Connector
2.048 Mhz, 75 Ohms	1	BNC
10 MHz, 50 Ohms	1	BNC
2.048 Mbps	1	BNC

Technical specifications are subject to changes without notice.
All brand name and trademarks are the property of their respective owners.
Revision – 4.5, December 20, 2019

U.K.

Valiant Communications (UK) Ltd
Central House Rear Office
124 High Street, Hampton Hill,
Middlesex, TW12 1NS, U.K.

E-mail: gb@valiantcom.com

U.S.A.

Valcomm Technologies Inc.
4000 Ponce de Leon Blvd.,
Suite 470, Coral Gables,
FL 33146, U.S.A.

E-mail: us@valiantcom.com

INDIA

Valiant Communications Limited
71/1, Shivaji Marg,
New Delhi - 110015,
India

E-mail: mail@valiantcom.com