



ARMOIRE DE FERMENTATION RETARDER PROVER CABINET

400 x 600 mm 2 compartiments / 2 compartments

AF2C68-H

Photos non contractuelles / Photos not contractual



- Tableau de commande électronique
- Panneaux mousse polyuréthane
- Intérieur inox
- Crémaillère en inox, pas de 15 mm
- Groupe frigorifique tropicalisé
- Sonde hygrométrie électronique
- Taux d'humidité réglable de 35 à 85%
- Retour en froid standard
- Sur pieds réglables jusqu'à 150 mm
- Roulettes non fournies
- Grilles non fournies
- Livrée montée
- 230/50Hz/1
- Puissance : 2.7 kW
- Poids net : 290 kg


Options :

- Sonde hygrométrie électronique - Grilles
- Compresseur à distance - Inox extérieur
- Taux d'humidité réglable jusqu'à 95 %
- 60Hz

- Electronical control panel
- Polyurethane foam panels
- Stainless steel interior
- Stainless steel rack rail guides adjustable every 15 mm
- Tropicalized refrigerating unit
- Electronical humidity probe
- Adjustable humidity from 35 up to 85%
- Standard cooling phase
- On adjustable feet of 150 mm
- Castors not supplied
- Grids not supplied
- 230/50Hz/1
- Power : 2.7 kW
- Net weight : 290 kg

Options :

- Electronical humidity probe - Grids
- Remote compressor - stainless steel exterior
- Adjustable humidity up to 95 %
- 60Hz

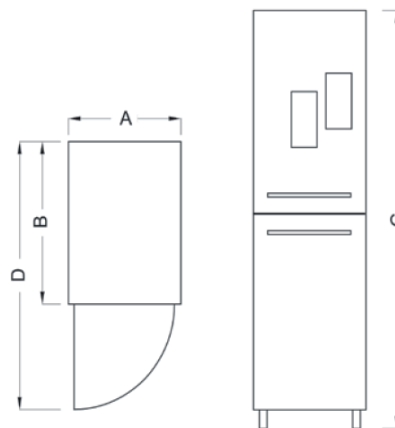

A = 870 mm
B = 1238 mm
C = 2390 mm
D = 1950 mm



www.caplainmachines.com



Caplain Machines



Caplain Machines



8 / 10 Rue Clément Ader
77170 Brie Comte Robert
France



+ 33 1 60 02 19 19