

Product Environmental Profile

Evlink Home anti tripping system 3P






General information

| | |
|-----------------------------------|---|
| Representative product | Evlink Home anti tripping system 3P - EVA1HPC3 |
| Description of the product | The Anti-Tripping Module senses the total current drawn by the local installation and, depending on the Maximum Current threshold set by the user, reduces the current drawn by the EVlink Home charging station. It applies to the three-phase Anti-Tripping Module for the three-phase EVlink Home charging station only. |
| Functional unit | Limits the maximum power draw of the EVlink Home charging station to ensure the continuity of the electrical distribution under all conditions during 8 years. - EN 61326-1:2013 - EN 61010-1:2010+A1:2019 - poles description: 3P + N - IP20 conforming to IEC 60529 - IK05 conforming to IEC 60068-2 |



Constituent materials

Reference product mass 940 g including the product, its packaging and additional elements and accessories

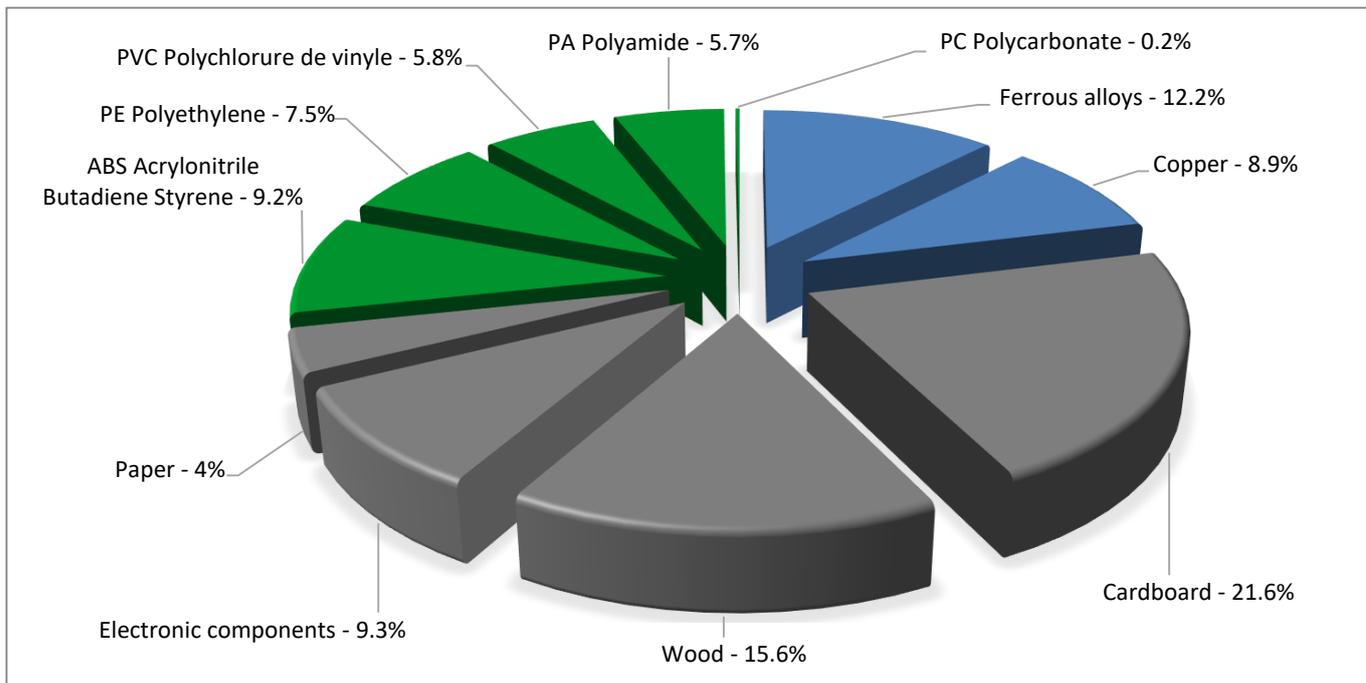

| | |
|----------|-------|
| Plastics | 28.4% |
| Metals | 21.1% |
| Others | 50.5% |



Substance assessment

Products of this range are designed in conformity with the requirements of the RoHS directive (European Directive 2011/65/EU of 2 January 2013, amended in March 2015, 2015/863/EU and in November 2017, 2017/2102/EU) and do not contain, or only contain in the authorised proportions, lead, mercury, cadmium, hexavalent chromium or flame retardants (polybrominated biphenyls - PBB, polybrominated diphenyl ethers – PBDE), Bis (2-ethylhexyl)phthalate - DEHP, Benzyl butyl phthalate– BBP, Dibutyl phthalate - DBP, Diisobutyl phthalate - DIBP) as mentioned in the Directive.

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website

<http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page>



Additional environmental information

The Evlink Home anti tripping system 3P presents the following relevant environmental aspects

| | |
|----------------------|--|
| Design | Indicate all the eco-design improvements brought to the product at the design phase compared to previous offer range, refer to ecoDesign Way results |
| Manufacturing | Manufactured at a Schneider Electric production site ISO14001 certified |
| Distribution | Weight and volume of the packaging optimized, based on the European Union's packaging directive Packaging weight is 456 g, consisting of wood(35.94%), cardboard(20.12%), paper(26.69%), EPE(17.25%) |
| Installation | Ref EVA1HPC3 does not require any installation operations. |
| Use | The product does not require special maintenance operations. |
| End of life | <p>End of life optimized to decrease the amount of waste and allow recovery of the product components and materials</p> <p>This product contains electronic card (63.55g) that should be separated from the stream of waste so as to optimize end-of-life treatment.</p> <p>The location of these components and other recommendations are given in the End of Life Instruction document which is available on the Schneider-Electric Green Premium website http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page</p> <p>Recyclability potential: 64% Based on "ECO'DEEE recyclability and recoverability calculation method" (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).</p> |




Environmental impacts

| | | | | |
|---|---|--|--|--|
| Reference life time | 8 years | | | |
| Product category | Other equipments - Passive product - non-continuous operation | | | |
| Installation elements | No special components needed | | | |
| Use scenario | The product is in active mode 20% of the time with a power use of 5W and in stand-by mode 80% of the time with a power use of 2W, for 8 years | | | |
| Geographical representativeness | Europe | | | |
| Technological representativeness | The Anti-Tripping Module senses the total current drawn by the local installation and, depending on the Maximum Current threshold set by the user, reduces the current drawn by the EVlink Home charging station. It applies to the three-phase Anti-Tripping Module for the three-phase EVlink Home charging station only. | | | |
| Energy model used | Manufacturing | Installation | Use | End of life |
| | Energy model used: China | Electricity grid mix; AC; consumption mix, at consumer; 230V; FR | Electricity grid mix; AC; consumption mix, at consumer; 230V; FR | Electricity grid mix; AC; consumption mix, at consumer; 230V; FR |

Compulsory indicators

Evlink Home anti tripping system 3P - EVA1HPC3

| Impact indicators | Unit | Total | Manufacturing | Distribution | Installation | Use | End of Life |
|--|-------------------------------------|----------|---------------|--------------|--------------|----------|-------------|
| Contribution to mineral resources depletion | kg Sb eq | 5.26E-03 | 5.25E-03 | 0* | 0* | 9.67E-06 | 0* |
| Contribution to the soil and water acidification | kg SO ₂ eq | 1.21E-01 | 4.69E-02 | 5.54E-04 | 0* | 7.37E-02 | 3.04E-04 |
| Contribution to water eutrophication | kg PO ₄ ³⁻ eq | 1.76E-02 | 1.06E-02 | 1.28E-04 | 0* | 6.72E-03 | 9.34E-05 |
| Contribution to global warming | kg CO ₂ eq | 4.65E+01 | 2.63E+01 | 1.21E-01 | 0* | 1.98E+01 | 2.02E-01 |
| Contribution to ozone layer depletion | kg CFC11 eq | 3.14E-05 | 3.09E-06 | 0* | 0* | 2.83E-05 | 8.88E-09 |
| Contribution to photochemical oxidation | kg C ₂ H ₄ eq | 8.67E-03 | 4.33E-03 | 3.95E-05 | 0* | 4.27E-03 | 3.07E-05 |
| Resources use | Unit | Total | Manufacturing | Distribution | Installation | Use | End of Life |
| Net use of freshwater | m ³ | 4.70E+02 | 9.28E-01 | 0* | 0* | 4.69E+02 | 0* |
| Total Primary Energy | MJ | 2.15E+03 | 3.34E+02 | 1.71E+00 | 0* | 1.81E+03 | 1.46E+00 |

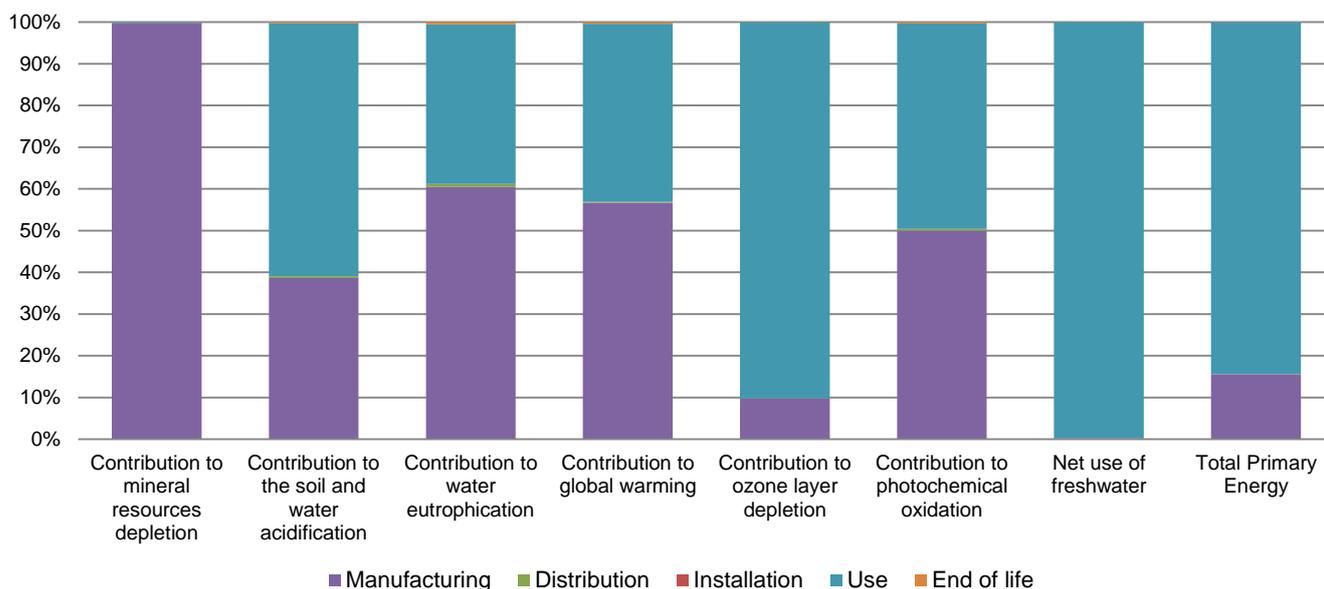

| Optional indicators | | Evlink Home anti tripping system 3P - EVA1HPC3 | | | | | | |
|---|----------------|--|---------------|--------------|--------------|----------|-------------|--|
| Impact indicators | Unit | Total | Manufacturing | Distribution | Installation | Use | End of Life | |
| Contribution to fossil resources depletion | MJ | 5.12E+02 | 2.81E+02 | 1.70E+00 | 0* | 2.28E+02 | 1.18E+00 | |
| Contribution to air pollution | m ³ | 3.16E+03 | 2.48E+03 | 5.16E+00 | 0* | 6.60E+02 | 1.04E+01 | |
| Contribution to water pollution | m ³ | 3.83E+03 | 2.80E+03 | 1.99E+01 | 0* | 1.00E+03 | 1.39E+01 | |
| Resources use | Unit | Total | Manufacturing | Distribution | Installation | Use | End of Life | |
| Use of secondary material | kg | 1.56E-02 | 1.56E-02 | 0* | 0* | 0* | 0* | |
| Total use of renewable primary energy resources | MJ | 1.47E+02 | 1.58E+01 | 0* | 0* | 1.31E+02 | 0* | |
| Total use of non-renewable primary energy resources | MJ | 2.00E+03 | 3.18E+02 | 1.71E+00 | 0* | 1.68E+03 | 1.46E+00 | |
| Use of renewable primary energy excluding renewable primary energy used as raw material | MJ | 1.40E+02 | 8.82E+00 | 0* | 0* | 1.31E+02 | 0* | |
| Use of renewable primary energy resources used as raw material | MJ | 6.96E+00 | 6.96E+00 | 0* | 0* | 0* | 0* | |
| Use of non renewable primary energy excluding non renewable primary energy used as raw material | MJ | 1.99E+03 | 3.06E+02 | 1.71E+00 | 0* | 1.68E+03 | 1.46E+00 | |
| Use of non renewable primary energy resources used as raw material | MJ | 1.23E+01 | 1.23E+01 | 0* | 0* | 0* | 0* | |
| Use of non renewable secondary fuels | MJ | 0.00E+00 | 0* | 0* | 0* | 0* | 0* | |
| Use of renewable secondary fuels | MJ | 0.00E+00 | 0* | 0* | 0* | 0* | 0* | |
| Waste categories | Unit | Total | Manufacturing | Distribution | Installation | Use | End of Life | |
| Hazardous waste disposed | kg | 1.01E+02 | 9.99E+01 | 0* | 0* | 3.74E-02 | 1.35E+00 | |
| Non hazardous waste disposed | kg | 5.22E+01 | 1.17E+01 | 0* | 0* | 4.05E+01 | 0* | |
| Radioactive waste disposed | kg | 6.02E-01 | 3.34E-03 | 0* | 0* | 5.98E-01 | 0* | |
| Other environmental information | Unit | Total | Manufacturing | Distribution | Installation | Use | End of Life | |
| Materials for recycling | kg | 6.64E-01 | 7.47E-02 | 0* | 0* | 0* | 5.89E-01 | |
| Components for reuse | kg | 0.00E+00 | 0* | 0* | 0* | 0* | 0* | |
| Materials for energy recovery | kg | 3.56E-02 | 0* | 0* | 0* | 0* | 3.56E-02 | |
| Exported Energy | MJ | 9.48E-03 | 9.48E-03 | 0* | 0* | 0* | 0* | |

* represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version EIME v5.9.3, database version 2022-01 in compliance with ISO14044.

The Modify manually the text to mention the equal impacting phases phase is the life cycle phase which has the greatest impact on the majority of environmental indicators (based on compulsory indicators).

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

| | | | |
|---|----------------------|-------------------------------------|--|
| Registration number : | SCHN-00850-V01.01-EN | Drafting rules | PCR-ed3-EN-2015 04 02 |
| Verifier accreditation N° | VH18 | Supplemented by | PSR-0005-ed2-EN-2016 03 29 |
| Date of issue | 09/2022 | Information and reference documents | www.pep-ecopassport.org |
| | | Validity period | 5 years |
| Independent verification of the declaration and data, in compliance with ISO 14025 : 2010 | | | |
| Internal | External | X | |
| The PCR review was conducted by a panel of experts chaired by Philippe Osset (SOLINNEN) | | | |
| PEP are compliant with XP C08-100-1 :2016 | | | |
| The elements of the present PEP cannot be compared with elements from another program. | | | |
| Document in compliance with ISO 14025 : 2010 « Environmental labels and declarations. Type III environmental declarations » | | | |



Schneider Electric Industries SAS

Country Customer Care Center
<http://www.schneider-electric.com/contact>

35, rue Joseph Monier
 CS 30323
 F- 92506 Rueil Malmaison Cedex
 RCS Nanterre 954 503 439
 Capital social 896 313 776 €

www.schneider-electric.com

SCHN-00850-V01.01-EN

Published by Schneider Electric

© 2019 - Schneider Electric – All rights reserved

09/2022