

Control Station and Control Panel: Control Station, WCT2 series

Weatherproof

IP65



Application

The WCT2 control stations are used for local or remote control of motor and machines. They are suitable for industrial plants, general areas and wet locations.

Specification

- Body, cover : Marine grade copper-free aluminium alloy with polyester powder coated, RAL 7032 (grey)
- Sealing gasket : Silicone
- Bolts, nuts : Stainless steel, SUS 304

Electrical Rating

- Switch rating ; AC 15 (inductive load) 3A./220V.
DC 12 (resistive load) 1.1A/220V.
Rated insulation voltage 600V.
Rated continuous current 10A.
- LED lamp rating ; Transformer input 110, 220, 230V.ac
Direct 6-24V.dc
- Incan. lamp rating ; Transformer input 380V.ac

Technical Data

Protection	Weatherproof
Ambient Temperature	-20°C to +50°C
Index of Protection	IP65
Connection Terminals	Terminal block for 1-2.5mm. ² cable
Entries	Ø1/2" to Ø1" NPT (M20x1.5 to M32x1.5)
Mounting	Wall type

Catalogue Number Logic

WCT2 - ■ - - **T**

Series	Number of Unit	Entries		Number of Terminal
		Position	Size	
1	1-unit	T Dead-end/ Top	N1 Ø1/2" NPT	2T 2-Poles
2	2-units	B Dead-end/ Bottom	N2 Ø3/4" NPT	4T 4-Poles
3	3-units	C Through-feed	N3 Ø1" NPT	6T 6-Poles
4	4-units		M1 M20x1.5	8T 8-Poles
5	5-units		M2 M25x1.5	
6	6-units		M3 M32x1.5	


Ordering Requirements

Number of Unit	Cat. No.	Approx. Weight (kgs.)
1-unit	WCT2-1-□□□-□T	1.45
2-units	WCT2-2-□□□-□T	2.15
3-units	WCT2-3-□□□-□T	3.05
4-units	WCT2-4-□□□-□T	3.65
5-units	WCT2-5-□□□-□T	3.85
6-units	WCT2-6-□□□-□T	3.98


Optional : Padlockable by pin for push buttons and/or selector switches

Dimension

1, 2-units

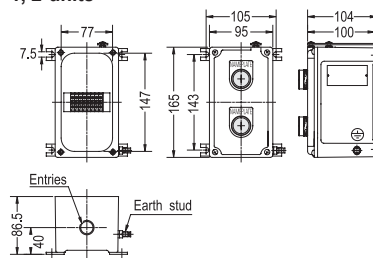

3, 4-units

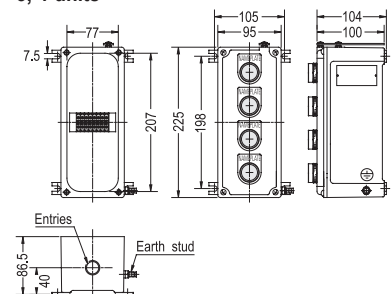

5, 6-units

