

T8 LED Tube, ALT8 series


Feature

- For warehouses and corridors, parking garages and sales areas etc.
- The structure is made of aluminium.
- Milky white plastic diffuser, clear diffuser is optional.
- Provides natural light and without UV rays.
- Water and dust protection standards IP20
- Colour rendering index (CRI) more than 80
- Passed the radio disturbance limits TIS1955-2551
- Long lifespan of up to 50,000 hours (L70)
- High efficiency up to 120 lm/W
- Light colors 830 and 865






Dimension in mm.

LED Power	Dimension in mm.		
	A	Ø B	C
9W.	589	24.5	32
18, 20, 25W.	1198		

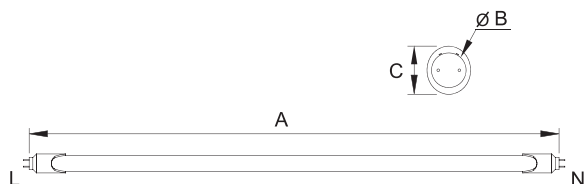

Wiring diagram

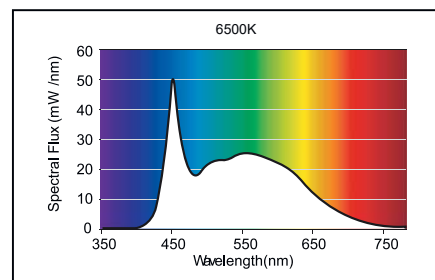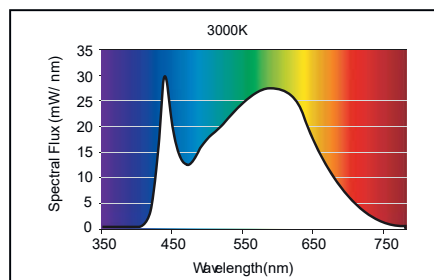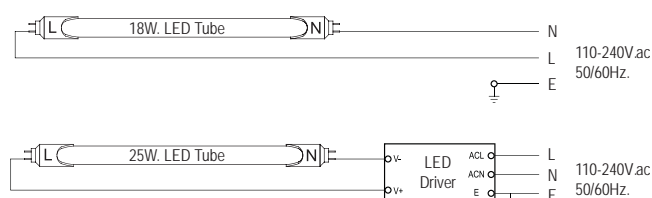

Cat. No.	ALT8-09LED/□	ALT8-18LED/□	ALT8-20LED/□	ALT8-25LED/□
Input voltage	110-240V.ac 50/60Hz.			
LED power	9W.	18W.	20W.	25W.
Power factor	>0.95			
Lumen output	1,000 lm	2,300 lm	2,400 lm	2,500 lm
Luminous efficient	110 lm/W	126 lm/W	120 lm/W	100 lm/W
Colour temperature	3,000K or 6,500K			
THDi	<15%			
Chip	Nichia			
Dimmable	No			
CRI	RA > 80			
Beam angle	180 degree			
Life time	>50,000 Hrs. (70% lumen maintenance)			
Ambient temperature	-20°C to +55°C			
Driver	Direct	Direct	Direct	Require driver
Housing material	Aluminium			
Standard	TIS1955-2551			
Warranty	3 years			

Specify □ Colour temperature ; 830 : 3,000K 865 : 6,500K