

อุปกรณ์แจ้งเตือนโรงพยาบาล

NURSE CALL SYSTEM

“OMSIN” รุ่น: OM-12/OM-24 โคมไฟหน้าห้อง

“OMSIN” Model: OM-12/OM-24 Corridor Light



Corridor Light


โคมไฟหน้าห้อง

Model: OM-12

OM-24

รายละเอียดผลิตภัณฑ์

- สามารถติดตั้งง่าย และรวดเร็ว
- ฐาน Panel ทำจากพลาสติก ABS สีฟ้าเทา
- ฝาครอบทำจาก พลาสติก PP สีขาวขุ่น แสงส่องผ่านได้
- โคมไฟหน้าห้อง สามารถติดตั้งได้ที่หน้าห้องผู้ป่วยหรือ
- หน้าห้องน้ำผู้พิการ, หน้าห้องพิเศษต่าง ๆ
- โคมไฟหน้าห้องมี 2 แบบ
 1. มีแสงส่องสว่างแจ้งเตือน รุ่น OM-12, OM-24
 2. มีทั้งแสงและเสียงแจ้งเตือน รุ่น OM-12 / Buzzer, OM-24 / Buzzer
- แสง LED ส่องสว่างสีแดง หรือแสงสีตามที่ต้องการผลิต
- สามารถใช้แรงดันไฟ 12 VDC หรือ 24 VDC
- ผลิตในประเทศไทย

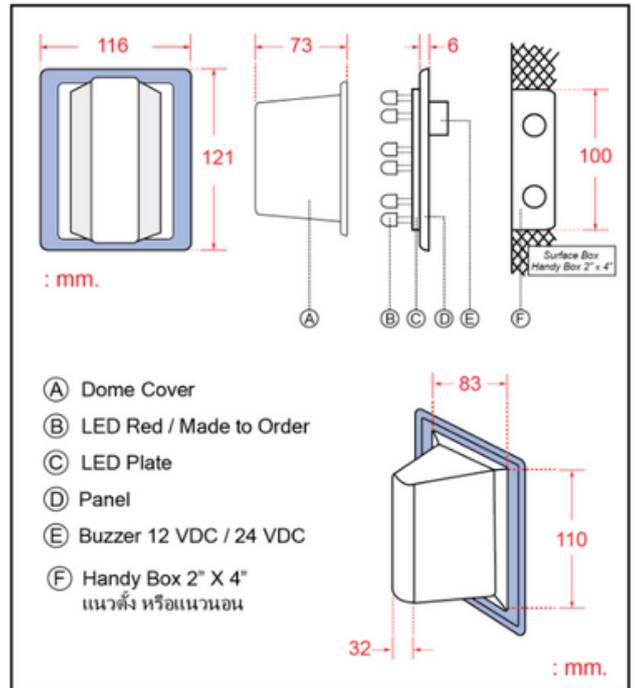

Model	OM-12	OM-24	OM-12 / Buzzer	OM-24 / Buzzer
Input Voltage	12 VDC	24 VDC	12 VDC	24 VDC
LED Red Color / Current	LED x 12 100mA	LED x 12 130mA	LED x 12 120mA	LED x 12 150mA
Sound Output Current	—	—	85dB at 20 cm. 40mA	85dB at 20 cm. 20mA
Tone Type (Buzzer)	—	—	Buzzer	Buzzer
Panel Plastic ABS Dimension (W x H)	Blue-Gray Color 116 x 121 mm.			
Dome Cover Dimension (W x L x H)	White Color 83 x 110 x 73 mm.			
Weight (Product / BOX)	90g. / 45g.	90g. / 45g.	100g. / 45g.	100g. / 45g.