




NVR

HP-9732H8

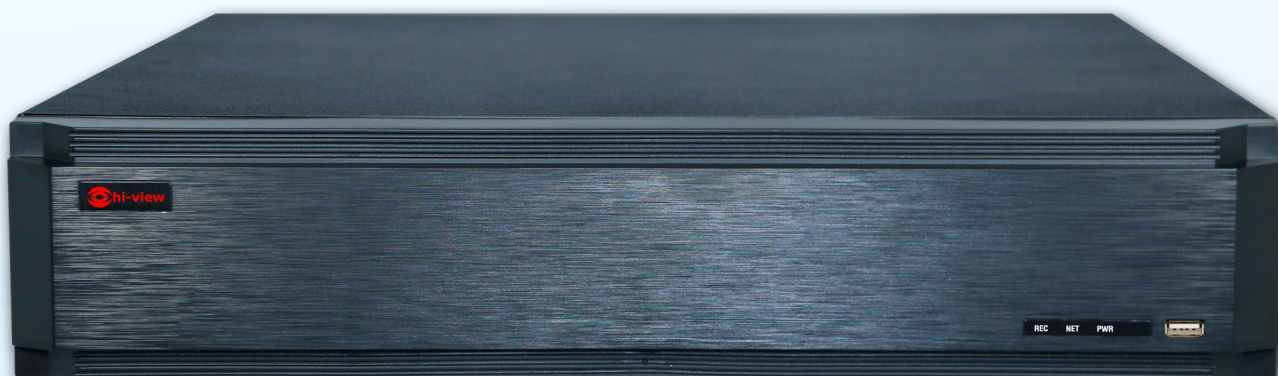

NETWORK VIDEO RECORDER

32CH / 8HDD

8MP / 5MP / 4MP / 3MP / 1080P / 960P / 720P

Specification



Characteristics

- Support 32 CH 8MP / 5MP / 4MP / 3MP / 1080P / 960P / 720P IP input
- Adopt standard H.265 / H.264 high profile compression format to get high-quality video at much lower bit rate
- Intuitive and user-friendly Graphic User Interface (GUI), Windows style operation by mouse
- Multi-mode recording: manual / timer / motion / sensor
- Playback : 16 CH simultaneous playback
- Search : time slice, time, event (manual, sensor, motion), tag search
- Express and flexible backup via USB, network and so on
- Pentaplex : preview, record, playback, backup and remote access
- DHCP, DDNS, PPPoE network protocol and CMS supported
- Remote control via IE or CMS : preview, playback, backup, PTZ and configuration
- Dual stream technology for local storage with high definition, remote
- network transmission and remote surveillance with mobile device
- Multi-user online simultaneously
- Authorization management, log view and device status view
- 4K output, true high resolution display
- Support PTZ preset and auto cruise, up to 255 presets and 8 cruises
- Support NAT function and QRCode scanning by mobile phone and PAD
- Powerful smart phone & Pad surveillance with iOS and Andriod OS

Model	HP-9732H8
Compression	Standard H.265,H.264
OS	Embedded Linux
Video	
Network Input	32 CH IPC input
Network Access Bandwidth	256Mbps
Network Access Format	8MP / 5MP / 4MP / 3MP 1080P / 960P / 720P@25 / 30fps
Output	HDMI x 2 : one of 4Kx2K / 1920x1080 / 1280x1024 the other of 1920 x 1080 / 1280 x 1024 VGA x 1 : 1920 x 1080 / 1280 x 1024
Audio	
Network Input	32 CH IPC audio input
2-way Audio	RCAX1
Local Output	RCAX1
Record	
Record Stream	Dual stream recording
Resolution	8MP / 5MP / 4MP / 3MP / 1080P / 960P / 720P
Mode	Manual, timer, motion, sensor
Playback	
Simultaneous Playback	Max 16 CH
Search	Time slice / time / event / tag search
Smart Search	Highlighted color to display the camera record in a certain period of time, different colors refers to different record events
Function	Play, pause, FF, FB, digital zoom, etc.
Alarm	
Mode	Manual, sensor, motion, exception
Input	8 CH local alarm input, support IPC alarm input
Output	4 CH
Triggering	Record, snap, preset, e-mail, etc.
Network	
Interface	RJ45 10 / 100 / 1000 Mbps x 2
Protocol	TCP / IP, PPPoE, DHCP, DNS, DDNS, UPnP, NTP, SMTP
Web Client	Max 10 users online
Mobile Device	
OS	iOS, Andriod
Storage	
HDD	SATA X8 (Max. 80TB) , e-SATA X2
Backup	
Local Backup	U disk, USB mobile HDD
Network Backup	Yes
Port	
USB	USB 2.0 x2 / USB 3.0 x 1
Remote Controller	Yes
Others	
Power Supply	ATX
Consumption	≤ 15W (without HDD)
Dimensions	430 x 453 x 89 (W x D x H)
Work Environment	-10 ~ 50℃, 10% ~ 90% humidity