




NVR 8900 SERIES

4K ULTRA HD

Network Video Recorder

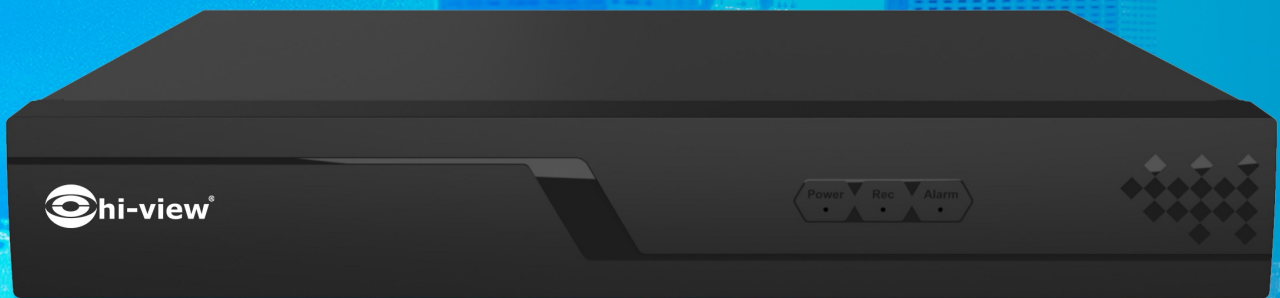

hiviewXview



Download Application

NETWORK VIDEO RECORDER

ONVIF



Feature

- * 32*4K (Access bandwidth 240Mbps) video input;
- * HDMI 4K,VGA 1080P video output;
- * 1.5U Case, 2SATA(Up to 14TB);
- * H.265AI/H.265+(compatible H.265/H.264)
- * 1*10/100/1000Mbps auto-sensing Ethernet port, RJ45 port;
- * Automatic networking support, a key to add equipment;
- * Support the Onvif protocol;
- * Support GB28181 (Optional);
- * Cloud services, P2P, alarm information push to phone;
- * Support remote access, support ARSP;
- * Support DHCP, FTP, DNS, DDNS, NTP, UPNP, EMAIL, 3G, WIFI, IP search, Alarm center, etc;
- * Mobile phone remote monitoring (iOS, Android);
- * Multi browser access (IE, Chrome, Firefox, Safari);
- * Support for more than twenty languages;
- * Perfect protection circuit, unique triple watchdog function;
- * Support WEB, CMS, VMS, MYEYE Platform;
- * Support AI functions config like Face detection and human detect etc.

Specification

Model	HP-8932H2
system	Embedded Linux
Video	
Video input	32*4K (Access bandwidth 240Mbps)
Playback(real-time+Un real-time)	4K(1+2(/5M(2+3(/4M(2+5) 3M(3+6(/1080P(5+9)
Decode	H.265AI/H.265+(compatible H.265/H.264)
Audio	
Compression	G.711a
Intercom	Support
Management	
Record mode	Manual>Alarm>Motiondetection>Timing
Inquire mode	Inquire by Time/Calendar/Event/Channel/Face
Storage mode	HDD Storage, Network Storage
Backup	Network, USB, SATA
Interface	
HDMI output	1*HDMI (MAX:4K)
VGA output	1*VGA (MAX:1080P)
Ethernet port	1*RJ45 1*10/100Mbps Ethernet port,
POE ports	N/A
Audio	I/O 1/1 (3.5mm)
Alarm	I/O 0/0
USB Port	2*USB2.0 ports
HDD	2*SATA interface (Up to 8TB)
General	
Temperature	0C - + 55C
Humidity	10% -90% RH
Power supply	12V/2A
Consumption	<10W (Without HDD)
Weight Around	1.69KG
Dimension	355(L)* 255mm(W)* 55mm(H)



hiviewXview



Download Application