


Specification



Feature

- Using CAT.5 network patch cords support power for the wireless AP / CPE and IP camera / PTZ
- Networking standard: IEEE802.3af / at / bt
- POE power light blinks to determine the power status of the receiving end, and each blink is 2.7 watts
- PoE Watchdog AI Function: Detection front-end PoE cameras and PD, Automatic detection, Automatic restart
- Upload port automatic flip (Auto MDI / MDIX)
- 6KV lightning protection, 8KV surge protection, anti-reverse connection, over-current protection, over-voltage protection, over-temperature protection, Short circuit protection
- The Max output power of the port is 60W, which is convenient for hi-power equipment
- Zero configuration feature power supply is automatically supplied to the adaptive equipment

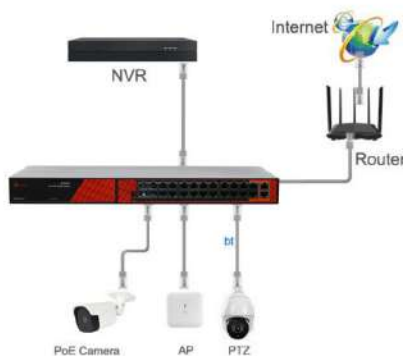

Model	HG-SW26 4P24
Ports	22X10/100/100Mbps PoE ports (RJ45) 2X10/100/100Mbps PoE ports (RJ45) 2X10/100Mbps uplink port (RJ45)
Transmission Rate	2000Mbps Full Duplex; 10 or 100 or 1000Mbps Half Duplex
Transmission Distance	0-100m
Performance Specification	Bandwidth: 12.4Gbps Network Latency (10 to 1000Mbps): ≤16μs (use the 64byte package size) MAC address table: 8K The Frame Filter & Transmission Rate: 14800pps the most for 10M port, 148800pps the most for 100M port, 1488000pps the most for 1000M port
Networking Standard	IEEE 802.3i 10BASE-T IEEE 802.3u 100BASE-TX/ IEEE 802.3ab 1000BASE-T IEEE 802.3xFlowControl IEEE 802.3at/at/bt Power over Ethernet
Power Support	Power input: AC 110-220V Total ≤ 400W PoE Watchdog: Port 1-24 Power output: PoE1-22Port:1/2(+52V),3/6(GND) ≤ 30W PoE 23-24 Port:1245(+53V),3678(GND) compatible1/2(+52V),3/6(GND) ≤ 60W
Protection Level	Lightning Protection:6KV, Per: IEC61000-4-5 ESD Protection:8KV, Per: IEC61000-4-2
Physical Specifications	Size(L*W*H): 430mm*180mm*45mm
Working Environment	Operating Temperature: -10C-55C (-14-131F) Storage Temperature: -40C -70C (-104-158F) Operating Humidity: 10%-90% non-condensing Storage Humidity: 5%-90% non-condensing
Electromagnetic Compatibility	CE mark FCCPart15, Class B VCCI ClassBEN55022 (CISPR 22) C-Tick