





DVR 9800 Series
HA-98516-1






Specification 1/2

Feature

- 5-in-1 (AHD,TVI,CVI,CVBS, IPC)
- Video compression H.264
- Audio compression G.711, ADPCM, G.726
- TVI / CVI / AHD 1080P lite, 720P, WD1 real time
- IPC x2 / 12Mbps
- HDMI x1: 1920x1080, VGA x1: 1920x1080, BNC x1: CVBS (used as the main or spot output)
- Two-way audio Take up channel one audio input
- Playback 16 CH
- IP Input Resolution 3MP / 1080P / 960P / 720P Frame Rate 25fps (PAL) / 30fps (NTSC)

Model	HA-98516-1
Video system	5-in-1 (AHD,TVI,CVI,CVBS,IPC)
Compression	Standard H.264 High Profile
Audio compression	G.711, ADPCM, G.726
Video standard	PAL/NTSC
Video	
Input	BNC x16
Resolution	TVI / CVI / AHD 1080P lite, 720P, WD1 real time
IP Input/Access Bandwidth	IPC x2 / 12Mbps
Output	HDMI x1: 1920x1080, VGA x1: 1920x1080, BNC x1: CVBS (used as the main or spot output)
Audio	
Input	RCA x1
Output	RCA x1
Two-way audio	Take up channel one audio input
Record	
Resolution	1080P lite, 720P, 720P lite, WD1
Frame Rate	1080P lite / 720P: 1~12fps (PAL / NTSC) 720P lite / WD1: 1~25fps(PAL / NTSC)
Bit Rate	768Kbps~4Mbps
Encode	VBR / CBR
Quality	6 Level
Mode	Manual, timer, motion
File Manager	Lock, unlock
IP Input	
Resolution	3MP / 1080P / 960P / 720P
Frame Rate	25fps (PAL) / 30fps (NTSC)
Playback	
Playback	16 CH
Search	Time / calendar search, event (motion)
Smart Search	Highlighted date and time to display the channel record
Function	Play, pause, FF, FB, digital zoom
Alarm	
Mode	Motion, video loss
Input / Output	No
Triggering	Record, PTZ move, e-mail, etc

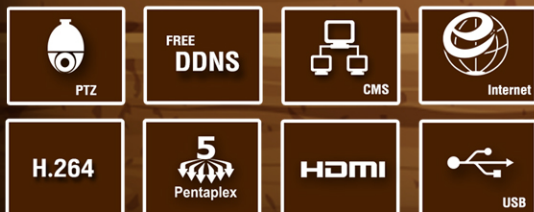



Specification 2/2

Feature

- 5-in-1 (AHD,TVI,CVI,CVBS, IPC)
- Video compression H.264
- Audio compression G.711, ADPCM, G.726
- TVI / CVI / AHD 1080P lite, 720P, WD1 real time
- IPC x2 / 12Mbps
- HDMI x1: 1920x1080, VGA x1: 1920x1080,
BNC x1: CVBS (used as the main or spot output)
- Two-way audio Take up channel one audio input
- Playback 16 CH
- IP Input Resolution 3MP / 1080P / 960P / 720P
Frame Rate 25fps (PAL) / 30fps (NTSC)

Model	HA-98516-1
Network Interface	RJ45 10M / 100Mbps x1
Protocol	TCP / IP, UDP, DHCP, DNS, PPPOE, DDNS
Others	10 users online, dual stream
Cell Phone	
OS	iPhone, Andriod
Function	Multi-screen surveillance (for certain model), record, snapshot, PTZ control, save the device list
Port	
HDD	SATA x1, max 8T
RS485	RS485 x1, connect to PTZ or keyboard
USB	USB 2.0 x2 (in the rear panel)
Remote Controller	Optional
Others	
Power Supply	DC 12V
Consumption	≤ 10W (without HDD)
Dimensions	(mm) 255 x 233 x 42 (W x D x H)
Work Environment	-10 ~ 50 °C, 10% ~ 90% humidity

