

## Energy storage - UPS-BAT/VRLA/24DC/12AH - 2320322

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Energy storage device, lead AGM, VRLA technology, 24 V DC, 12 Ah, tool-free battery replacement, automatic detection, and communication with QUINT UPS-IQ

### Product Description


For continuous monitoring and intelligent management, there is constant communication with the QUINT UPS. Thanks to automatic detection of the energy storage, and tool-free switching during operation, quick installation is possible. The QUINT UPS with IQ technology energy storage leaves the warehouse fully charged.

### Your advantages

- Maximum buffer times
- Lead AGM (Absorbent Glass Mat) technology



### Key Commercial Data

Packing unit	1 pc
GTIN	 4 046356 554107
GTIN	4046356554107
Weight per Piece (excluding packing)	9,100.000 g
Custom tariff number	85072080
Country of origin	China

### Technical data

#### Dimensions

Width	202 mm
Height	202 mm
Depth	110 mm

#### Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	0 °C ... 40 °C
Ambient temperature (storage/transport)	0 °C ... 40 °C

# Energy storage - UPS-BAT/VRLA/24DC/12AH - 2320322

## Technical data

### Ambient conditions

Max. permissible relative humidity (operation)	≤ 95 %
Degree of pollution	2

### Input data

Nominal input voltage	24 V DC
Buffer period	22.5 min. (20 A)
	9 min. (40 A)

### Output data

Nominal output voltage	24 V DC
Output current I <sub>max</sub>	50 A
Connection in parallel	5
Connection in series	No
Output fuse	2x 25 A

### General

IQ technology	Yes
Disposal	Used batteries must not be thrown away with household waste, they should instead be disposed of in accordance with applicable national regulations.
Net weight	8.9 kg
Memory medium	Lead rechargeable battery module
Degree of protection	IP20
Protection class	III
Mounting position	horizontal DIN rail NS 35, EN 60715

### Standards

Standard - Electrical safety	EN 62368-1/VDE 0868-1
------------------------------	-----------------------

### Conformance/approvals

UL approvals	UL/C-UL listed UL 508
	UL/C-UL Recognized UL 60950-1
	UL ANSI/ISA-12.12.01 Class I, Division 2, Groups A, B, C, D (Hazardous Location)
Shipbuilding approval	DNV GL (EMC A), ABS
VdS approval	G 100001


### Environmental Product Compliance

China RoHS	Environmentally Friendly Use Period = 3
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"

## Drawings

# Energy storage - UPS-BAT/VRLA/24DC/12AH - 2320322

Block diagram

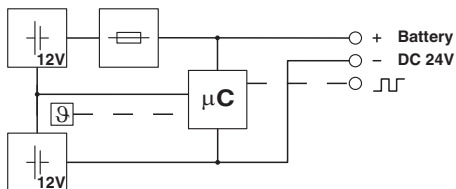

Pictogram



## Classifications

### eCl@ss

eCl@ss 10.0.1	27050403
eCl@ss 11.0	27050403
eCl@ss 4.0	27040600
eCl@ss 4.1	27040600
eCl@ss 5.0	27040600
eCl@ss 5.1	27040600
eCl@ss 6.0	27040600
eCl@ss 7.0	27050403
eCl@ss 9.0	27050403

### ETIM

ETIM 2.0	EC000382
ETIM 3.0	EC000382
ETIM 4.0	EC000357
ETIM 6.0	EC000357
ETIM 7.0	EC000357

### UNSPSC

UNSPSC 6.01	30211510
UNSPSC 7.0901	39121011
UNSPSC 11	39121011
UNSPSC 12.01	39121011
UNSPSC 13.2	26111715

# Energy storage - UPS-BAT/VRLA/24DC/12AH - 2320322

## Classifications

### UNSPSC

UNSPSC 18.0	26111715
UNSPSC 19.0	26111715
UNSPSC 20.0	26111715
UNSPSC 21.0	26111715

## Approvals

### Approvals

#### Approvals

DNV / BV / LR / ABS / UL Listed / UL Recognized / cUL Recognized / cUL Listed / EAC / cULus Recognized / cULus Listed

#### Ex Approvals

UL Listed / cUL Listed / cULus Listed

### Approval details

DNV		<a href="http://exchange.dnv.com/tari/">http://exchange.dnv.com/tari/</a>	TAA0000265
Nominal voltage UN		500 V	
Nominal current IN		41 A	
mm <sup>2</sup> /AWG/kcmil		6	

BV		<a href="http://www.veristar.com/portal/veristarinfo/generalinfo/approved/approvedProducts/equipmentAndMaterials">http://www.veristar.com/portal/veristarinfo/generalinfo/approved/approvedProducts/equipmentAndMaterials</a>	41516/A0 BV
----	--	---	-------------

LR		<a href="http://www.lr.org/en">http://www.lr.org/en</a>	17/20032
----	--	---	----------

ABS		<a href="http://www.eagle.org/eagleExternalPortalWEB/">http://www.eagle.org/eagleExternalPortalWEB/</a>	20-2022474-PDA
-----	--	---	----------------

UL Listed		<a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a>	FILE E 123528
-----------	--	---	---------------

# Energy storage - UPS-BAT/VRLA/24DC/12AH - 2320322

## Approvals

UL Recognized		<a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a>	FILE E 211944
---------------	--	---	---------------

cUL Recognized		<a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a>	FILE E 211944
----------------	--	---	---------------

cUL Listed		<a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a>	FILE E 123528
------------	--	---	---------------

EAC			RU D.GB09.W.0081/20
-----	--	--	------------------------

cULus Recognized			
------------------	--	--	--

cULus Listed			
--------------	--	--	--

## Accessories

Accessories

Assembly adapter

Assembly adapters - QUINT-ADAPTER/4 - 2866857

Assembly adapter for QUINT-BAT/24DC... on 35mm rail



---

## Battery unit

## Energy storage - UPS-BAT/VRLA/24DC/12AH - 2320322

### Accessories

Uninterruptible power supply replacement battery - UPS-BAT-KIT-VRLA 2X12V/12AH - 2908235



Replacement battery for UPS-BAT/VRLA... energy storage

---

### Fuse

Fuse - FUSE 25A/32V ATOF - 2908366



Fuse, nominal current: 25 A, length: 19.1 mm, width: 5 mm, height: 18.8 mm

---

---