


Type 2 surge protection device - F-MS 12 GY1



2801280

<https://www.phoenixcontact.com/sg/products/2801280>

Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.



Surge arrester type 2, consisting of base element and protective plug with N-PE total current spark gap for mounting on NS 35/7.5, housing width: 17.5 mm (1 Div.)

Type 2 surge protection device - F-MS 12 GY1



2801280

<https://www.phoenixcontact.com/sg/products/2801280>

Commercial Data

Item number	2801280
Packing unit	10 pc
Minimum order quantity	10 pc
Note	Made to Order (non-returnable)
Sales Key	*****
Product Key	CL1327
GTIN	4046356750318
Weight per Piece (including packing)	112.56 g
Weight per Piece (excluding packing)	110.63 g
Customs tariff number	85363010
Country of origin	DE

Type 2 surge protection device - F-MS 12 GY1

2801280

<https://www.phoenixcontact.com/sg/products/2801280>

Technical Data

Product properties

IEC test classification	II
	T2
EN type	T2
Number of positions	1
Surge protection fault message	optical

Insulation characteristics

Overvoltage category	III
Pollution degree	2


Electrical properties

Nominal frequency f_N	50 Hz (60 Hz)
-------------------------	---------------

Connection data

Connection method	Screw connection
Screw thread	M5
Tightening torque	3 Nm (1.5 mm ² ... 16 mm ²) 4.5 Nm (25 mm ² ... 35 mm ²)
Stripping length	16 mm
Conductor cross section flexible	1.5 mm ² ... 25 mm ²
Conductor cross section solid	1.5 mm ² ... 35 mm ²
Conductor cross section AWG	15 ... 2
Connection method	Fork-type cable lug
Conductor cross section flexible	1.5 mm ² ... 16 mm ²

Dimensions

Dimensional drawing	
Width	17.6 mm
Width	17.6 mm
Height	89.8 mm
Height	89.8 mm
Depth	65.7 mm (incl. DIN rail 7.5 mm)
Depth	65.7 mm
Horizontal pitch	1 Div.

Material specifications

Color	traffic grey A RAL 7042
-------	-------------------------

Type 2 surge protection device - F-MS 12 GY1



2801280

<https://www.phoenixcontact.com/sg/products/2801280>

Flammability rating according to UL 94	V-0
CTI value of material	600
Insulating material	PA 6.6/PBT
Material group	I
Housing material	PA 6.6 PBT

Mechanical properties

Mechanical data

Open side panel	No
-----------------	----

Protective circuit

Mode of protection	N-PE
Direction of action	N-PE
Nominal voltage U_N	240/415 V AC (TN - only N-PE) 240/415 V AC (TT - only N-PE)
Nominal frequency f_N	50 Hz (60 Hz)
Maximum continuous voltage U_C	260 V AC
Rated load current I_L	80 A
Residual current I_{PE}	$\leq 5 \mu\text{A}$
Standby power consumption P_C	$\leq 1.5 \text{ mVA}$
Nominal discharge current I_n (8/20) μs	20 kA
Maximum discharge current I_{max} (8/20) μs	40 kA
Follow current interrupt rating I_{fi}	100 A
Voltage protection level U_p	$\leq 1.5 \text{ kV}$
Residual voltage U_{res}	$\leq 0.4 \text{ kV}$ (at I_n) $\leq 0.25 \text{ kV}$ (at 10 kA) $\leq 0.15 \text{ kV}$ (at 5 kA) $\leq 0.1 \text{ kV}$ (at 3 kA)
Front of wave sparkover voltage at 6 kV (1.2/50) μs	$\leq 1.5 \text{ kV}$
TOV behavior at U_T	1200 V AC (200 ms / withstand mode)
Response time t_A	$\leq 100 \text{ ns}$
Max. backup fuse with V-type through wiring	80 A (gG)

Additional technical data

Maximum continuous voltage U_C	305 V AC
----------------------------------	----------

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP20 (only when all terminal points are used)
Ambient temperature (operation)	-40 °C ... 80 °C
Ambient temperature (storage/transport)	-40 °C ... 80 °C
Altitude	$\leq 2000 \text{ m}$ (amsl (above mean sea level))
Permissible humidity (operation)	5 % ... 95 %

Type 2 surge protection device - F-MS 12 GY1



2801280

<https://www.phoenixcontact.com/sg/products/2801280>

Shock (operation)	25g (Half-sine / 11 ms / 3x ±X, ±Y, ±Z)
Vibration (operation)	5g (10 ... 500 Hz / 2.5 h / X, Y, Z)

Standards and regulations

Standards/specifications	IEC 61643-11
Standards/specifications	EN 61643-11

Mounting

Mounting type	DIN rail: 35 mm
---------------	-----------------

Type 2 surge protection device - F-MS 12 GY1

2801280

<https://www.phoenixcontact.com/sg/products/2801280>



Drawings

Circuit diagram




Type 2 surge protection device - F-MS 12 GY1

2801280

<https://www.phoenixcontact.com/sg/products/2801280>



Dimensional drawing

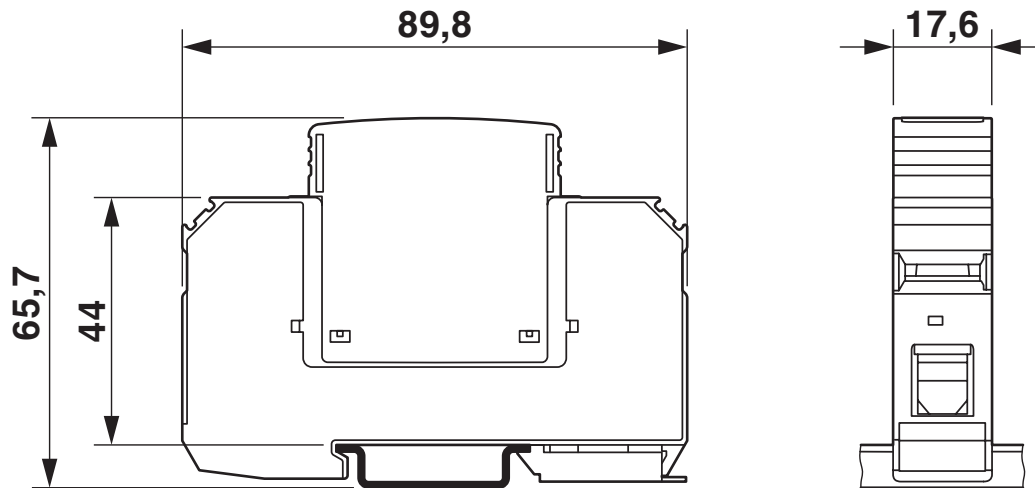

Type 2 surge protection device - F-MS 12 GY1



2801280

<https://www.phoenixcontact.com/sg/products/2801280>

Classifications

ECLASS

ECLASS-9.0	27130802
ECLASS-10.0.1	27130802
ECLASS-11.0	27130802

ETIM

ETIM 8.0	EC000381
----------	----------

UNSPSC

UNSPSC 21.0	
-------------	--

Type 2 surge protection device - F-MS 12 GY1



2801280

<https://www.phoenixcontact.com/sg/products/2801280>

Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Type 2 surge protection device - F-MS 12 GY1



2801280

<https://www.phoenixcontact.com/sg/products/2801280>

Accessories

Wiring bridge end cover

Wiring bridge end cover - MPB 18/3- D - 2809322

<https://www.phoenixcontact.com/sg/products/2809322>



End cover for lateral connection of wiring bridges, 3-phase

Feed-through terminal block

Feed-through terminal block - DK-BIC-35 - 2749880

<https://www.phoenixcontact.com/sg/products/2749880>



Feed-through terminal block for VAL and FLT applications

Type 2 surge protection device - F-MS 12 GY1

2801280

<https://www.phoenixcontact.com/sg/products/2801280>

Marker pen

Marker pen - B-STIFT - 1051993

<https://www.phoenixcontact.com/sg/products/1051993>



Marker pen, for manual labeling of unprinted Zack strips, smear-proof and waterproof, line thickness 0.5 mm

Zack marker strip

Zack marker strip - ZBN 18:UNBEDRUCKT - 2809128

<https://www.phoenixcontact.com/sg/products/2809128>



Zack marker strip, Strip, white, unlabeled, can be labeled with: CMS-P1-PLOTTER, PLOTMARK, mounting type: snap in, for terminal block width: 18 mm, lettering field size: 18 x 5 mm, Number of individual labels: 5

Type 2 surge protection device - F-MS 12 GY1

2801280

<https://www.phoenixcontact.com/sg/products/2801280>

Marker for terminal blocks

Marker for terminal blocks - ZBN 18,LGS:ERDE - 2749589

<https://www.phoenixcontact.com/sg/products/2749589>




Marker for terminal blocks, Strip, white, labeled, horizontal: Grounding symbol, mounting type: snap into tall marker groove, for terminal block width: 18 mm, lettering field size: 18 x 5 mm, Number of individual labels: 5

Marker for terminal blocks

Marker for terminal blocks - ZBN 18,LGS:L1-N,ERDE - 2749576

<https://www.phoenixcontact.com/sg/products/2749576>



Marker for terminal blocks, Strip, white, labeled, horizontal: L1, L2, L3, N, GND, mounting type: snap into tall marker groove, for terminal block width: 18 mm, lettering field size: 18 x 5 mm, Number of individual labels: 5

Type 2 surge protection device - F-MS 12 GY1



2801280

<https://www.phoenixcontact.com/sg/products/2801280>

Type 2 surge protection plug

Type 2 surge protection plug - F-MS 12 ST GY1 - 2801282

<https://www.phoenixcontact.com/sg/products/2801282>



Surge protection plug type 2, with N-PE total current spark gap for base element.

Phoenix Contact 2022 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT SEA Pte. Ltd.
105 Eunos Avenue 3, #04-00
Singapore 409836
+65 6228 4900
marketing@phoenixcontact.com.sg