

# EDS-208 Series

## 8-port entry-level unmanaged Ethernet switches



### Features and Benefits

- 10/100BaseT(X) (RJ45 connector), 100BaseFX (multi-mode, SC/ST connectors)
- IEEE802.3/802.3u/802.3x support
- Broadcast storm protection
- DIN-rail mounting ability
- -10 to 60°C operating temperature range

### Certifications



## Introduction

The EDS-208 Series supports IEEE 802.3/802.3u/802.3x with 10/100M, full/half-duplex, MDI/MDIX auto-sensing RJ45 ports. The EDS-208 Series is rated to operate at temperatures ranging from -10 to 60°C, and is rugged enough for any harsh industrial environment. The switches can be easily installed on a DIN rail as well as in distribution boxes. The DIN-rail mounting capability, wide operating temperature capability, and the IP30 housing with LED indicators make the plug-and-play EDS-208 switches easy to use and reliable.

## Specifications

### Ethernet Interface

Standards	IEEE 802.3 for 10BaseT IEEE 802.3u for 100BaseT(X) and 100BaseFX IEEE 802.3x for flow control			
10/100BaseT(X) Ports (RJ45 connector)	EDS-208: 8 EDS-208-M-SC: 1 EDS-208-M-ST: 1 Auto negotiation speed Full/Half duplex mode Auto MDI/MDI-X connection			
100BaseFX Ports (multi-mode SC connector)	EDS-208-M-SC: 1			
100BaseFX Ports (multi-mode ST connector)	EDS-208-M-ST: 1			
Optical Fiber			100BaseFX	
			Multi-Mode	
			Single-Mode	
	Fiber Cable Type	OM1	50/125 μm	G.652
			800 MHz x km	
	Typical Distance		4 km	5 km
	Wavelength	Typical (nm)	1300	
TX Range (nm)		1260 to 1360		
RX Range (nm)		1100 to 1600		
Optical Power	TX Range (dBm)	-10 to -20		
		0 to -5		

		100BaseFX		
		Multi-Mode		Single-Mode
		Fiber Cable Type	OM1	50/125 μm
			800 MHz x km	
	RX Range (dBm)	-3 to -32		-3 to -34
	Link Budget (dB)	12		29
	Dispersion Penalty (dB)	3		1

Note: When connecting a single-mode fiber transceiver, we recommend using an attenuator to prevent damage caused by excessive optical power.  
Note: Compute the “typical distance” of a specific fiber transceiver as follows: Link budget (dB) > dispersion penalty (dB) + total link loss (dB).

### Switch Properties

Processing Type	Store and Forward
MAC Table Size	2 K
Packet Buffer Size	768 kbits

### Power Parameters

Input Voltage	24 VDC
Input Current	EDS-208 Models: 0.07 A @ 24 VDC EDS-208-M Models: 0.1 A @ 24 VDC
Operating Voltage	12 to 48 VDC
Connection	1 removable 3-contact terminal block(s)
Overload Current Protection	2.5 A @ 24 VDC
Reverse Polarity Protection	Supported

### Physical Characteristics

Housing	Plastic
IP Rating	IP30
Dimensions	40 x 100 x 86.5 mm (1.57 x 3.94 x 3.41 in)
Weight	170 g (0.38 lb)
Installation	DIN-rail mounting

### Environmental Limits

Operating Temperature	-10 to 60°C (14 to 140°F)
Storage Temperature (package included)	-40 to 85°C (-40 to 185°F)
Ambient Relative Humidity	5 to 95% (non-condensing)


### Standards and Certifications

Safety	UL 508 UL 60950-1 EN 62368-1 (LVD)
EMC	EN 55032/35

EMI	CISPR 32, FCC Part 15B Class A
EMS	IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 3 V/m IEC 61000-4-4 EFT: Power: 1 kV; Signal: 0.5 kV IEC 61000-4-5 Surge: Power: 1 kV; Signal: 1 kV IEC 61000-4-6 CS: 3 V IEC 61000-4-8 PFMF
Shock	IEC 60068-2-27
Vibration	IEC 60068-2-6
Freefall	IEC 60068-2-31
<b>MTBF</b>	
Time	EDS-208 Models: 3,902,526 hrs EDS-208-M Models: 3,562,556 hrs
Standards	Telcordia (Bellcore), GB
<b>Warranty</b>	
Warranty Period	5 years
Details	See <a href="http://www.moxa.com/warranty">www.moxa.com/warranty</a>
<b>Package Contents</b>	
Device	1 x EDS-208 Series switch
Documentation	1 x quick installation guide 1 x warranty card

## Dimensions

Unit: mm (inch)

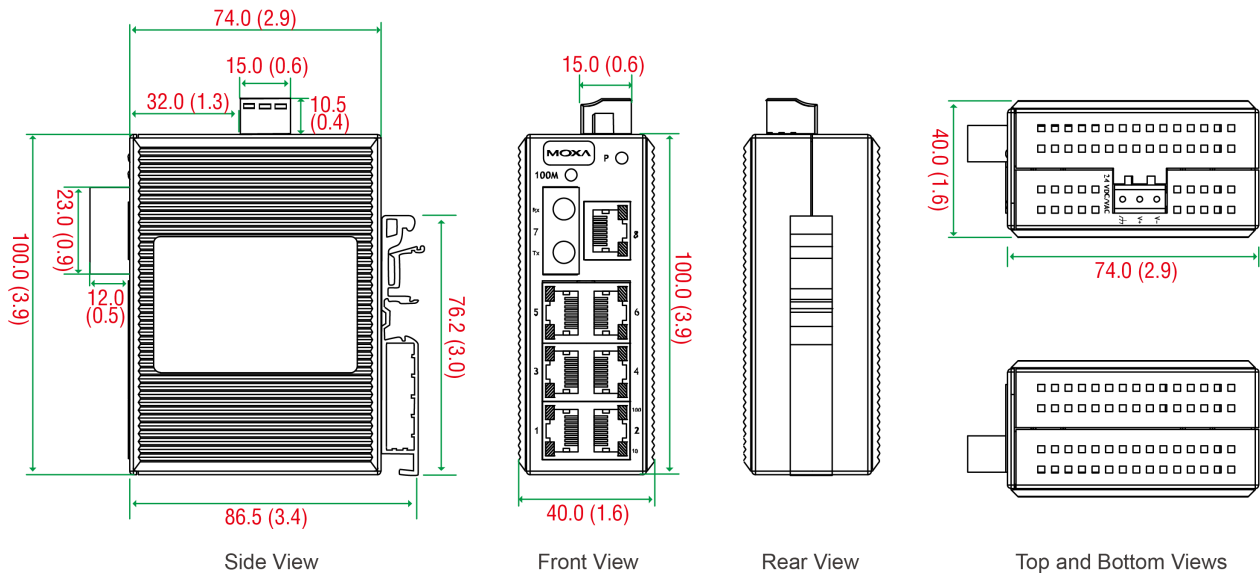

## Ordering Information

Model Name	10/100BaseT(X) Ports RJ45 Connector	100BaseFX Ports Multi-Mode ST Connector	100BaseFX Ports Multi-Mode SC Connector	Housing Material	Operating Voltage	Operating Temp.
EDS-208	8	–	–	Plastic	12-48 VDC	-10 to 60°C
EDS-208-M-ST	7	1	–	Plastic	12-48 VDC	-10 to 60°C
EDS-208-M-SC	7	–	1	Plastic	12-48 VDC	-10 to 60°C

## Accessories (sold separately)

### Power Supplies

DR-120-24	120W/2.5A DIN-rail 24 VDC power supply with universal 88 to 132 VAC or 176 to 264 VAC input by switch, or 248 to 370 VDC input, -10 to 60°C operating temperature
DR-4524	45W/2A DIN-rail 24 VDC power supply with universal 85 to 264 VAC or 120 to 370 VDC input, -10 to 50°C operating temperature
DR-75-24	75W/3.2A DIN-rail 24 VDC power supply with universal 85 to 264 VAC or 120 to 370 VDC input, -10 to 60°C operating temperature
MDR-40-24	DIN-rail 24 VDC power supply with 40W/1.7A, 85 to 264 VAC, or 120 to 370 VDC input, -20 to 70°C operating temperature
MDR-60-24	DIN-rail 24 VDC power supply with 60W/2.5A, 85 to 264 VAC, or 120 to 370 VDC input, -20 to 70°C operating temperature

### Rack-Mounting Kits

RK-4U	19-inch rack-mounting kit
-------	---------------------------

© Moxa Inc. All rights reserved. Updated Oct 25, 2023.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.