

▪ Specification





| System | |
|--------------------------------|-----------------------------------|
| Operating system | Linux |
| Display | |
| Screen size | 2.4 inch |
| Type | Display screen |
| Resolution | 320 × 240 |
| Video | |
| Lens | 1 |
| Resolution | 2 MP (video stream: 720P) |
| FOV | HFOV = 25°; VFOV = 43° |
| Video standard | PAL (Default) and NTSC |
| Audio | |
| Audio output | Built-in buzzer |
| Network | |
| Wired network | 10 M/100 M self-adaptive |
| Interface | |
| Network interface | 1 |
| Lock control | 1 |
| Exit button | 1 |
| Door contact input | 1 |
| TAMPER | 1 |
| RS-485 | Support |
| USB | 1 |
| Capacity | |
| Face capacity | 500 |
| Card capacity | 3000 |
| Event capacity | 150,000 |
| Authentication | |
| Face recognition distance | 0.3 m to 1.5 m |
| Face recognition accuracy rate | > 99% |
| Face recognition duration | < 0.2 s |
| Card type | M1 card |
| Card reading distance | 0 to 5 cm |
| Function | |
| Face anti-spoofing | Support |
| Face recognition | Support |
| General | |
| Supplement light | White light |
| Power supply | 12 VDC |
| Power consumption | ≤ 6 W |
| Working temperature | -10 °C to 55 °C (14 °F to 131 °F) |
| Working humidity | 0% to 90% (No condensing) |

| | |
|----------|--|
| Language | English, Spanish (South America), Arabic, Thai, Indonesian, Russian, Vietnamese, Portuguese (Brazil), Korean, Japanese |
| Keypad | Support |

▪ **Available Model**

DS-K1T321MX

▪ **Dimension**

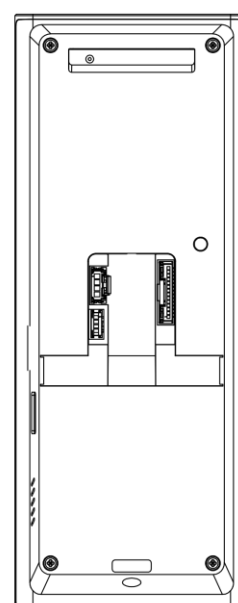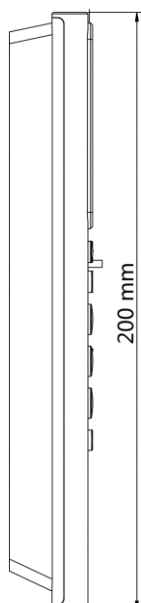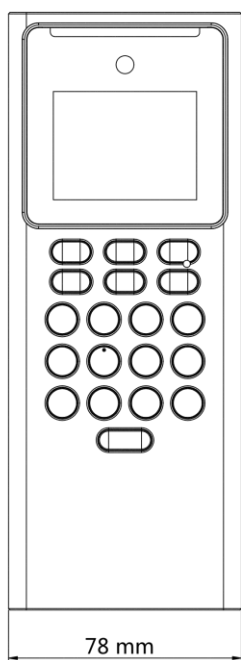

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision_Global



Hikvision
Corporate Channel



hikvisionhq