

⋄ Features

- \cdot The grounded circuit prevent a short circuit and over current of electricity.
- \cdot Anti-corrosive by SUS #304 and efficient insulation structure.
- \cdot External circulation function by strong circulation pump.
- \cdot Time set function and constant temperature.
- · Uniquely designed smooth exterior and circulation pump separable.

Specifications

Made in Korea

Spec. / Model		CWB-13L	CWB-20L	CWB-30L
Туре		Digital		
Controller		Digital PID Controller		
Range		Amb +5° C~100 ° C		
Temp	Accuracy	±0.2°C		
Size	Internal (W x D x H, mm)	340x210x180	400x250x200	450x300x230
Safety		Over temp limiter		
Material	Internal	Seamless Stainless steel #304		
	External	Steel, Powder coating		
Electric Requirements		220VAC 50/60Hz		
Heater		1500W	2000W	2000W
Cover		SUS #304		




Shaking Water Bath

www.hysc.co.kr

순환항온수조

Distinction

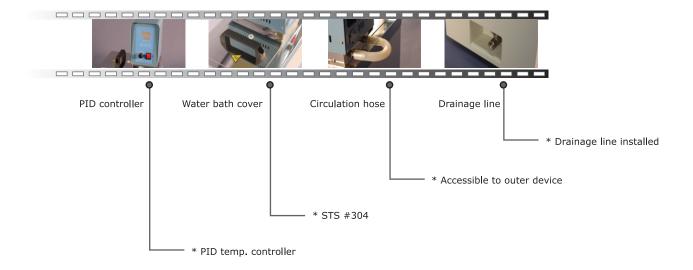

Structure

