

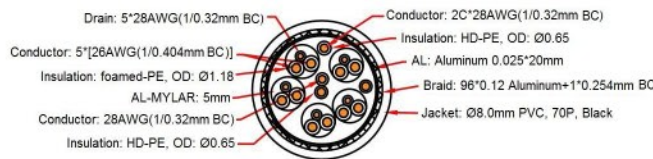



KEN HDMI Cable Specification

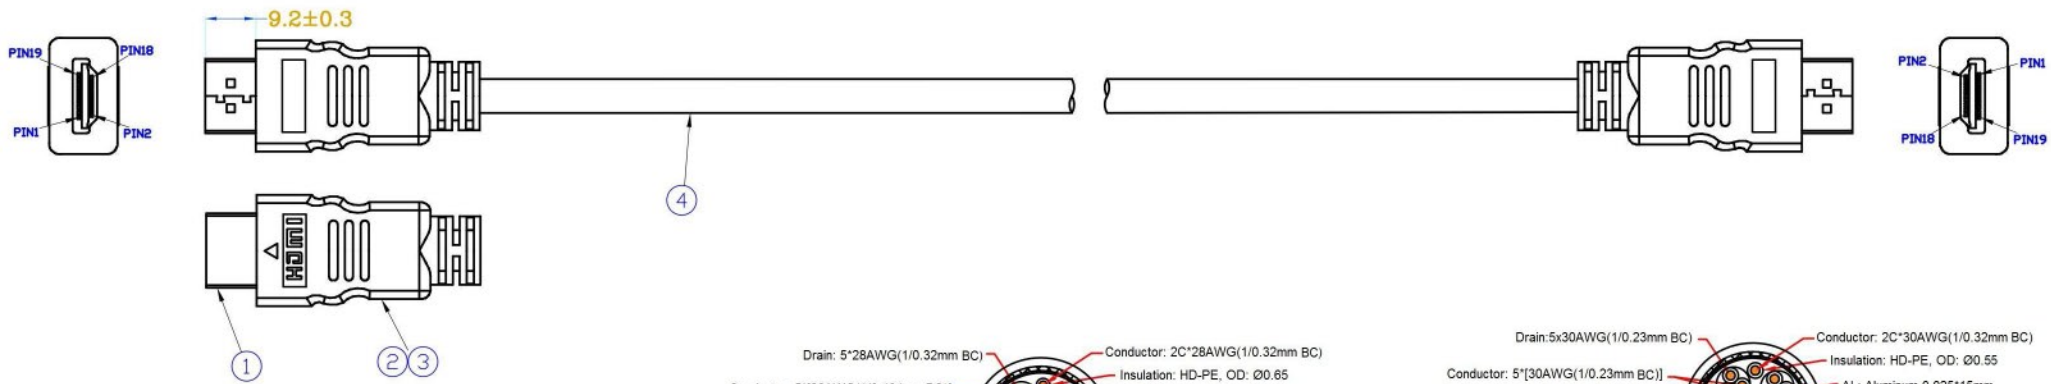

5P+4C(26AWG+28AWG)

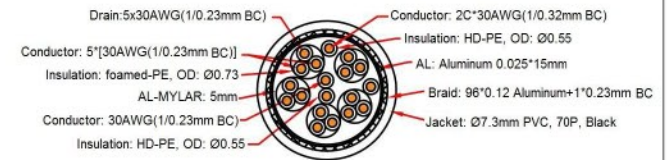

5P+4C(30AWG)

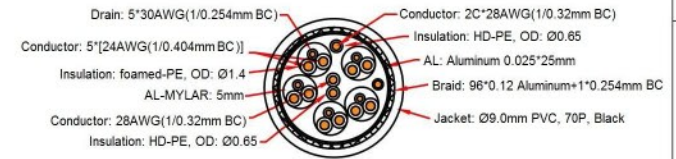

5P+4C(24AWG+28AWG)

Type A PIN	PIN Assignment	Type A PIN
1 Blue	[Crossed]	Blue 1
2 Drain wire		Drain wire 2
3 White	[Crossed]	White 3
4 Blue		Blue 4
5 Drain wire	[Crossed]	Drain wire 5
6 White		White 6
7 Blue	[Crossed]	Blue 7
8 Drain wire		Drain wire 8
9 White	[Crossed]	White 9
10 Blue		Blue 10
11 Drain wire	[Crossed]	Drain wire 11
12 White		White 12
14 Blue	[Crossed]	Blue 14
17 Drain wire		Drain wire 17
19 White	[Crossed]	White 19
15 Yellow		Yellow 15
16 Orange	Orange 16	
13 White	White 13	
18 Red	Red 18	
Shell Braid	Braid Shell	

Model No.	Cable (AWG)	Length(M)	Conductor SPEC	OD
KP-HDS0C	30#	0.5	(1/0. 23BCx1P+D/0. 23BC+AL) x5P +1/0. 23BCx4C+AL+96 Aluminum	Φ 7. 3
KP-HD01M	30#	1	(1/0. 23BCx1P+D/0. 23BC+AL) x5P +1/0. 23BCx4C+AL+96 Aluminum	Φ 7. 3
KP-HD02M	30#	2	(1/0. 23BCx1P+D/0. 23BC+AL) x5P +1/0. 23BCx4C+AL+96 Aluminum	Φ 7. 3
KP-HD03M	30#	3	(1/0. 23BCx1P+D/0. 23BC+AL) x5P +1/0. 23BCx4C+AL+96 Aluminum	Φ 7. 3
KP-HD05M	30#	5	(1/0. 23BCx1P+D/0. 23BC+AL) x5P +1/0. 23BCx4C+AL+96 Aluminum	Φ 7. 3
KP-HD10M	26#28#	10	(1/0. 404BCx1P+D/0. 254BC+AL) x5P +1/0. 32BCx4C+AL+96 Aluminum	Φ 8. 0
KP-HD15M	26#28#	15	(1/0. 404BCx1P+D/0. 254BC+AL) x5P +1/0. 32BCx4C+AL+96 Aluminum	Φ 8. 0
KP-HD20M	26#28#	20	(1/0. 505BCx1P+D/0. 254BC+AL) x5P +1/0. 32BCx4C+AL+96 Aluminum	Φ 9. 0

4	CABLE	HDMI CABLE 5P+4C, BLACK	1 Pcs
3	MOLDED	45P PVC BLACK	
2	MOLDED	LDPE	
1	CONNECTOR	HDMI MALE 2.0V. GOLD (BLUE) 19PIN	2 Pcs
No.	NAME	Description	QTY
	DATE:	2017.08.04	
SCALE:	UNITS:	NONE	MM

- NOTE:
1. OPEN/SHORT/INTERMITTERCE: 100% TEST
 2. HI-POT: 300V DC 0.1SEC
 3. INSULATION RESISTANCE: 3MOH/DC 300V
 4. RoHS COMPLIANT.
 5. Support: 4K 60HZ