



QF6WRC

WATER RESISTANT CEILING SPEAKER



QF6WRC Front



QF6WRC Side No Grille


The Australian Monitor QuickFit QF6WRC is an IP55 rated water resistant ceiling speaker.

Featuring a sealed enclosure, the QF6WRC is suitable for shower blocks, toilets, swimming pools and other wet areas.



FEATURES

- IP55 rated enclosure with powder coated aluminum grill
- Doped 6 Inch dual cone speaker driver
- Sealed ABS enclosure with glanded cable and cable tail
- 100V tapings 12, 9, 6, 3, 1 watts
- 70V tapings 6, 4.5, 3, 1, 0.5 watts
- Low impedance 12 watts @ 8 ohms
- Evac supervisory capacitor installed on 100V/70V outputs




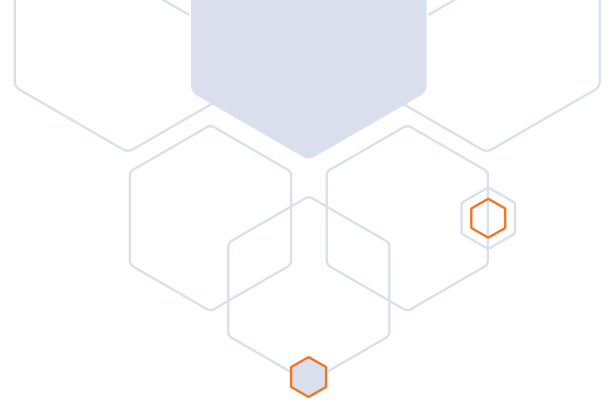


DIMENSIONS

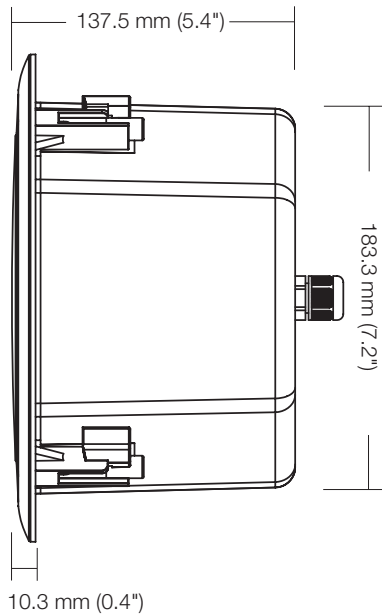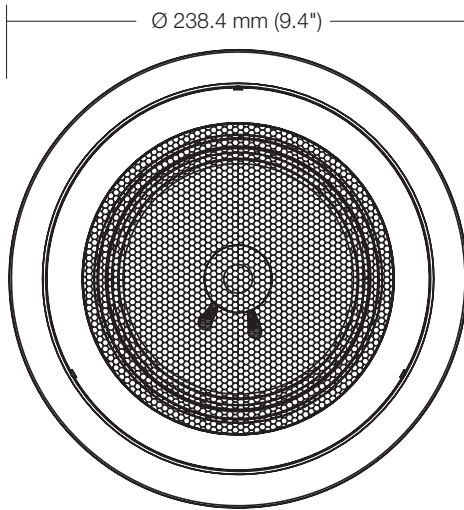

FREQUENCY RESPONSE

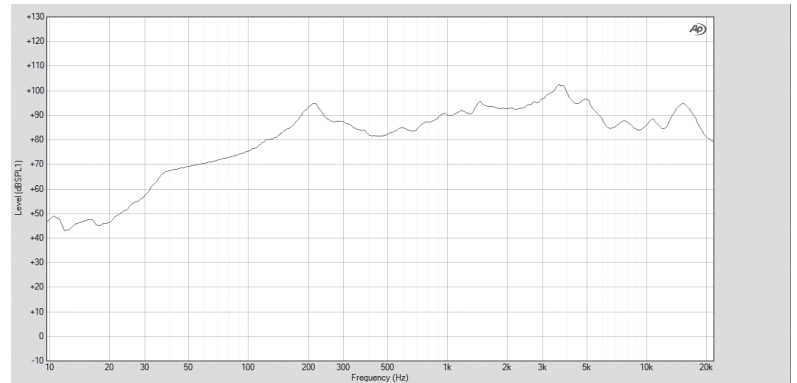

MODEL	QF6WRC
IMPEDANCE (DIRECT)	8 OHMS
POWER (CONTINUOUS, PROGRAM)	12 W, 24 W
POWER TAPPINGS @ 100V	1, 3, 6, 9, 12 Watts
POWER TAPS @ 70V	0.5, 1.5, 3, 4.5, 6 Watts
SENSITIVITY (1W/1M) @ 1 kHz	92 dB
CALCULATED MAX SPL	103 dB, 109 dB
DISPERSION DEGREES @ 1 kHz, 4 kHz	220°, 65°
FREQUENCY RESPONSE @ -10dB	150 Hz – 20 Hz
FREQUENCY RESPONSE @ -3dB	180 Hz – 18 Hz
SPEAKER COMPONENTS	6 inch doped dual cone speaker driver
INGRESS PROTECTION	IP 55
OPERATING TEMPERATURE	-30°C to +60°C
NET DIMENSIONS	238.4 x 137.5mm (9.4" x 5.4")

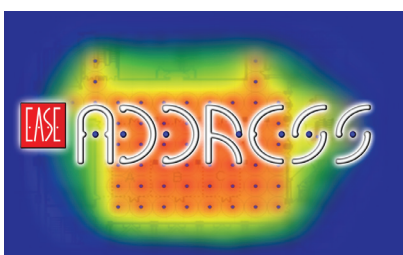

Please go to www.australianmonitor.com.au to download EASE® GLL files.

ENGINEERED BY AUSTRALIAN MONITOR

Address: Unit 1, 2 Daydream Street, Warriewood NSW 2102 Australia

Website: www.australianmonitor.com.au

International enquiries email: international@australianmonitor.com.au

ABN 86 003 231 187