



QUICKFIT DUAL CONE SERIES

QF5CS • QF6CS • QF8CS • QF8CSB

The Australian Monitor QuickFit range of ceiling speakers has been an industry staple for over a decade.

This refreshed series of QuickFit dual cone flush mount ceiling speakers are now better than ever. Offering improved voicing of these great products, refined toggle mounting system, and including all the information you need at your fingertips with a new cut out template providing wiring, wattage tapping and cut out information. Together these new and improved features provide an even better installation experience.

The QuickFit dual cone series QF5CS, QF6CS, QF8CS and QF8CSB provide cost effective solutions for a myriad of commercial audio applications such as education, shopping centres, common areas, RSLs, clubs, restaurants, fire evacuation systems and many more applications that requires a reliable high quality affordable commercial ceiling speaker product. Each model also features a supervisory capacitor as standard to allow for evacuation system integration.



QF8CS Front

FEATURES

- 5, 6 or 8 inch dual cone driver
- QuickFit white ABS plastic baffle and powder coated steel grille
- 100 volt line transformer
- Evac. capacitor as standard




QF8CS Front Without Grille





QF8CS Rear



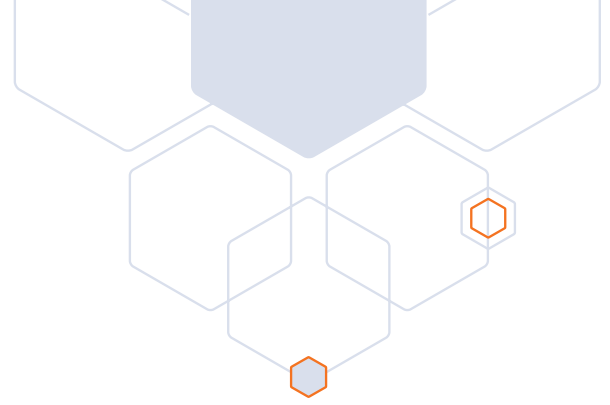

DIMENSIONS

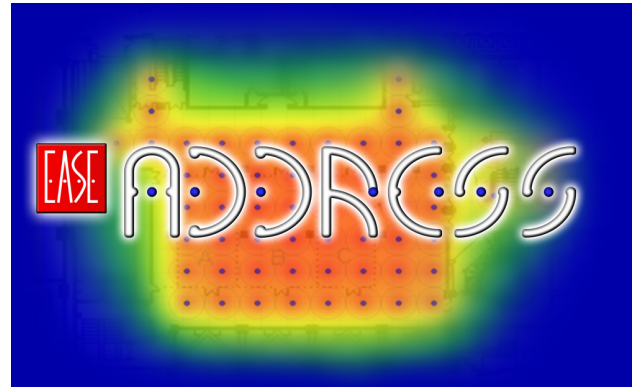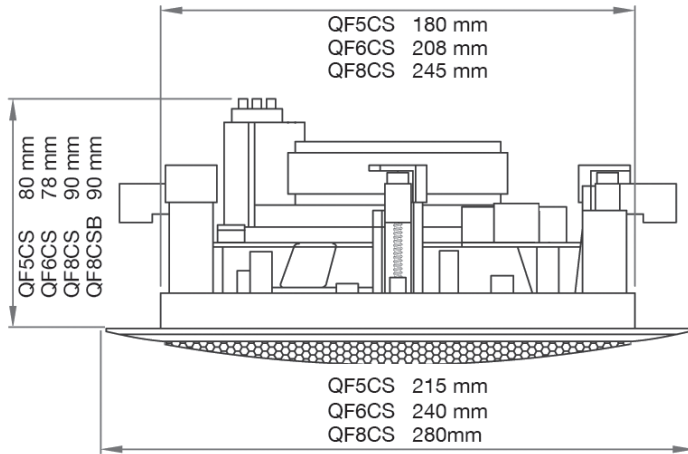

Please go to www.australianmonitor.com.au to download EASE® GLL files.

Polar plot and frequency response charts for other dual cone models are available at www.australianmonitor.com.au

| MODEL | QF5CS | QF6CS | QF8CS | QF8CSB |
|---------------------------|--------------------------|--------------------------|-----------------------------|-----------------------------|
| COAXIAL 2 WAY DRIVER | 5 Inch & 25 mm | 6 Inch & 25 mm | 8 Inch & 25 mm | 8 Inch & 25 mm |
| POWER TAPS @ 100V | 0.75, 1.5, 3, 6 watts | 1.25, 2.5, 5, 10 watts | 1.87, 3.75, 7.5, 15 watts | 1.87, 3.75, 7.5, 15 watts |
| POWER TAPS @ 70V | 0.38, 0.75, 1.5, 3 watts | 0.62, 1.25, 2.5, 5 watts | 0.93, 1.87, 3.75, 7.5 watts | 0.93, 1.87, 3.75, 7.5 watts |
| SENSITIVITY (1W/1M) | 88dB | 89dB | 90dB | 90dB |
| FREQUENCY RESPONSE | 80-20 KHz | 80-20 KHz | 80-20 KHz | 80-20 KHz |
| DISPERSION DEGREES @ 1KHZ | 100 | 100 | 100 | 100 |
| GRILLE COLOUR | White | White | White | Black |
| WEIGHT | 0.5 Kg | 0.9 Kg | 1.4 Kg | 1.4 Kg |
| DIMENSIONS | 215 x 80 mm | 240 x 78 mm | 280 x 90 mm | 280 x 90 mm |
| CUTOUT DIMENSION | 180 mm | 208 mm | 245 mm | 245 mm |
| EVAC CAPACITOR 2.2UF | Yes | Yes | Yes | Yes |

ENGINEERED BY AUSTRALIAN MONITOR

Address: Unit 1, 2 Daydream Street, Warriewood NSW 2102 Australia

Website: www.australianmonitor.com.au

International enquiries email: international@australianmonitor.com.au

ABN 86 003 231 187