SVM-12A

PROFESSIONAL ACTIVE STAGE MONITOR **700w**

- *12" Coaxial Active Stage Monitor*
- *2 way Bi-amped coaxial stage monitor Speaker*
- *Frequency Response 50Hz~20kHz*
- *Coverage angle(Horizontal x Vertical): 80°x80°*
- *Amplifier Class-D/AB*
- *Power output 350 Watts (RMS)*
- *MAXPower output 700 Watts*
- *Connectors Input: XLR / TRS(LINE/MIC) | Output: XLR link*
- *Operating voltage AC 220V-240V, ~50/60Hz*

SPECIFICATIONS

MODEL	SVM-12A
Type	2-way Bi-amped coaxial stage monitor Speaker
Driver	12" coaxial speaker
Frequency	50Hz-20kHz
Dispersion Angle (Horizontal x Vertical)	80°x 80°
Max output spl	124dB (1m)
Impedance	Mic Balance 20K | Mic Unbalance 10K
	LINE Balance 200K | LINE Unbalance 100K
Amplifier	Class D/AB + switching power design
Power output (RMS)	350W
Power output (MAX)	700W
Inputs	XLR / TRS (LINE/MIC) input
Outputs	XLR link output
Preset model	Flat / Low cut selectable
Enclosure	
Cabinet	Plywood painted cabinet
Grill	1.2mm steel
Pole	35mm stand pole
Operating voltage	AC 220V-240V, ~50/60HZ
Power consumption	65W
Dimensions (H x W x D)	340x500x460mm
Packed Dimensions (H x W x D)	585x530x455mm
Net Weight	17kgs
Gross Weight	19kgs

EXAMPLE ON THIS LIVE SOUND SYSTEM

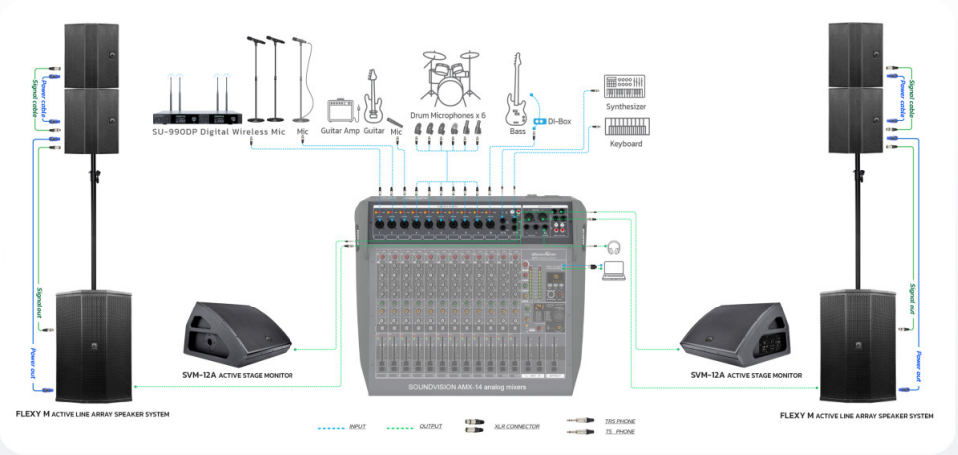

SOUND VISION CO., LTD.
9 Chaiyaphruek Rd.,Taling Chan,Taling Chan, Bangkok 10170 Thailand
Email : info@soundvision.co.th
Support : 02-433-9988
LINE Official : @soundvision
www.soundvisionpro.com