

SPC HERRINGBONE SERIES



Size		625 x 125 mm
Product Thickness		6.0 mm (5.0 mm + IXPE 1.0 mm)
Wear Layer		0.3 mm
General appearance	ISO 24337	Pass
Dimensional stability	ISO 23999	Length average -0.05%
		Width average -0.05%
		Curling average 0.10mm
Color fastness	ISO 105-B02	Grade 6
Abrasion resistance	EN 13329	>2000 cycles
Micro-scratch resistance	EN 16094	MSR-A
		MSR-B2
Impact resistance	EN 13329	1800 mm
Effect of a furniture leg	EN 424	No visible damage
Castor chair resistance	EN 425	Pass 25000 cycles
Thickness swelling	ISO 24336	0.04%
Locking strength	ISO 24334	Long Side : 6.12 kN/m
		Short Side : 5.69 kN/m
Resistance to staining	EN 438-2	Grade 5
		Grade 4
Phthalate content test	EN 14372	Not detected
Heavy metal migration	EN 71-3	Not detected
Slip resistance	DIN 51130	R10



Waterproof



Easy To Clean



Easy Installation



Anti slipping



Fire retardant



Soft, warm and quiet underfoot

DISTRIBUTED BY :



UNICOM IMPORT-EXPORT CO., LTD.

888 Moo 13, Bangna-Trad Rd., Soi 45, Bangkaew, Bangplee, Samutprakarn 10540 THAILAND

TEL : (66-2) 316 3199 FAX : (66-2) 316 3199 # 8199

www.unicom.co.th

RECTANGO

SPC Herringbone EIR

2025

click lock



RECTANGO



SPC Herringbone EIR Series 6 mm with IXPE



HBW102



HBW101



HBW103




HBW104



HBW105

SPC Flooring EIR Structure

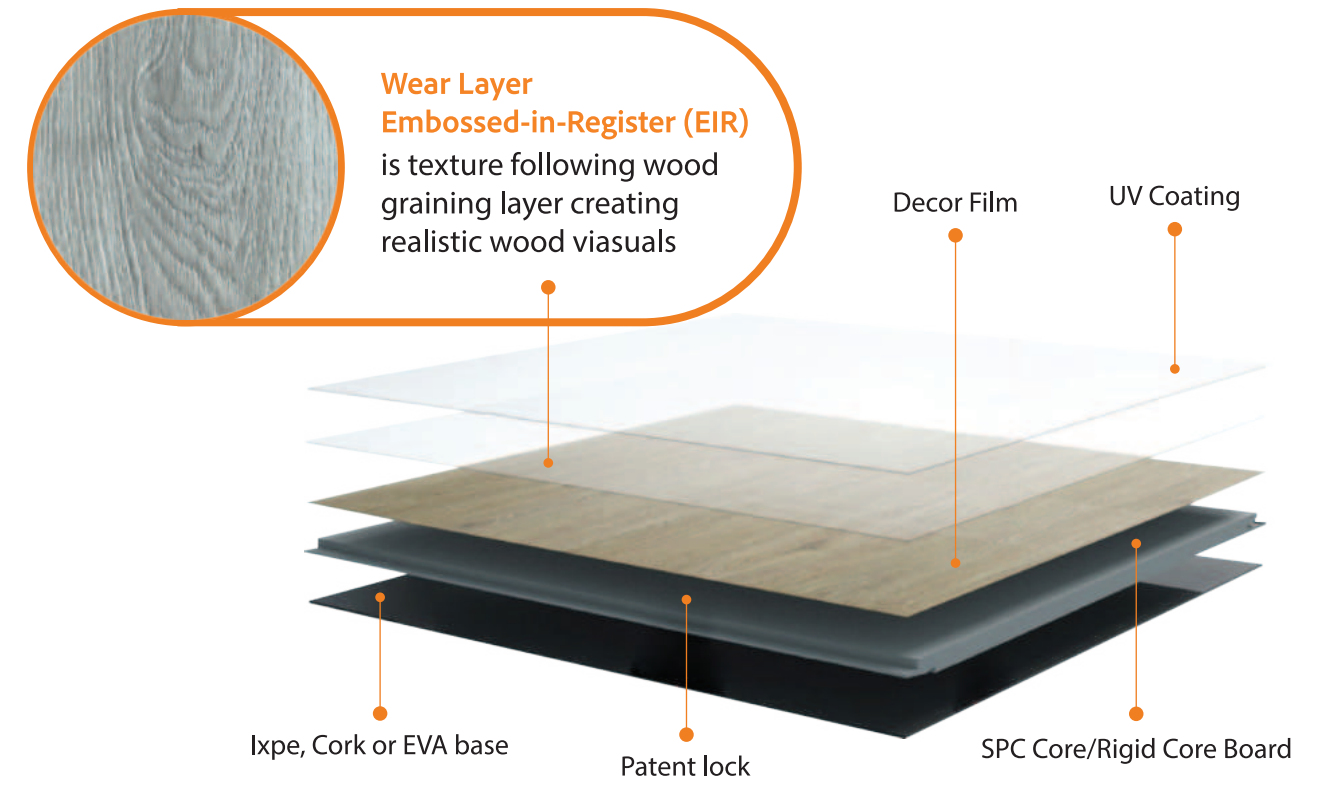

SPC Accessories

Skirting	End Cap	T- Moulding
SK101W	EC101W	TM101W
SK102W	EC102W	TM102W
SK103W	EC103W	TM103W
SK104W	EC104W	TM104W
SK105W	EC105W	TM105W