




Nature Plus + **RECTANGO**

Square Tile * Glue Down



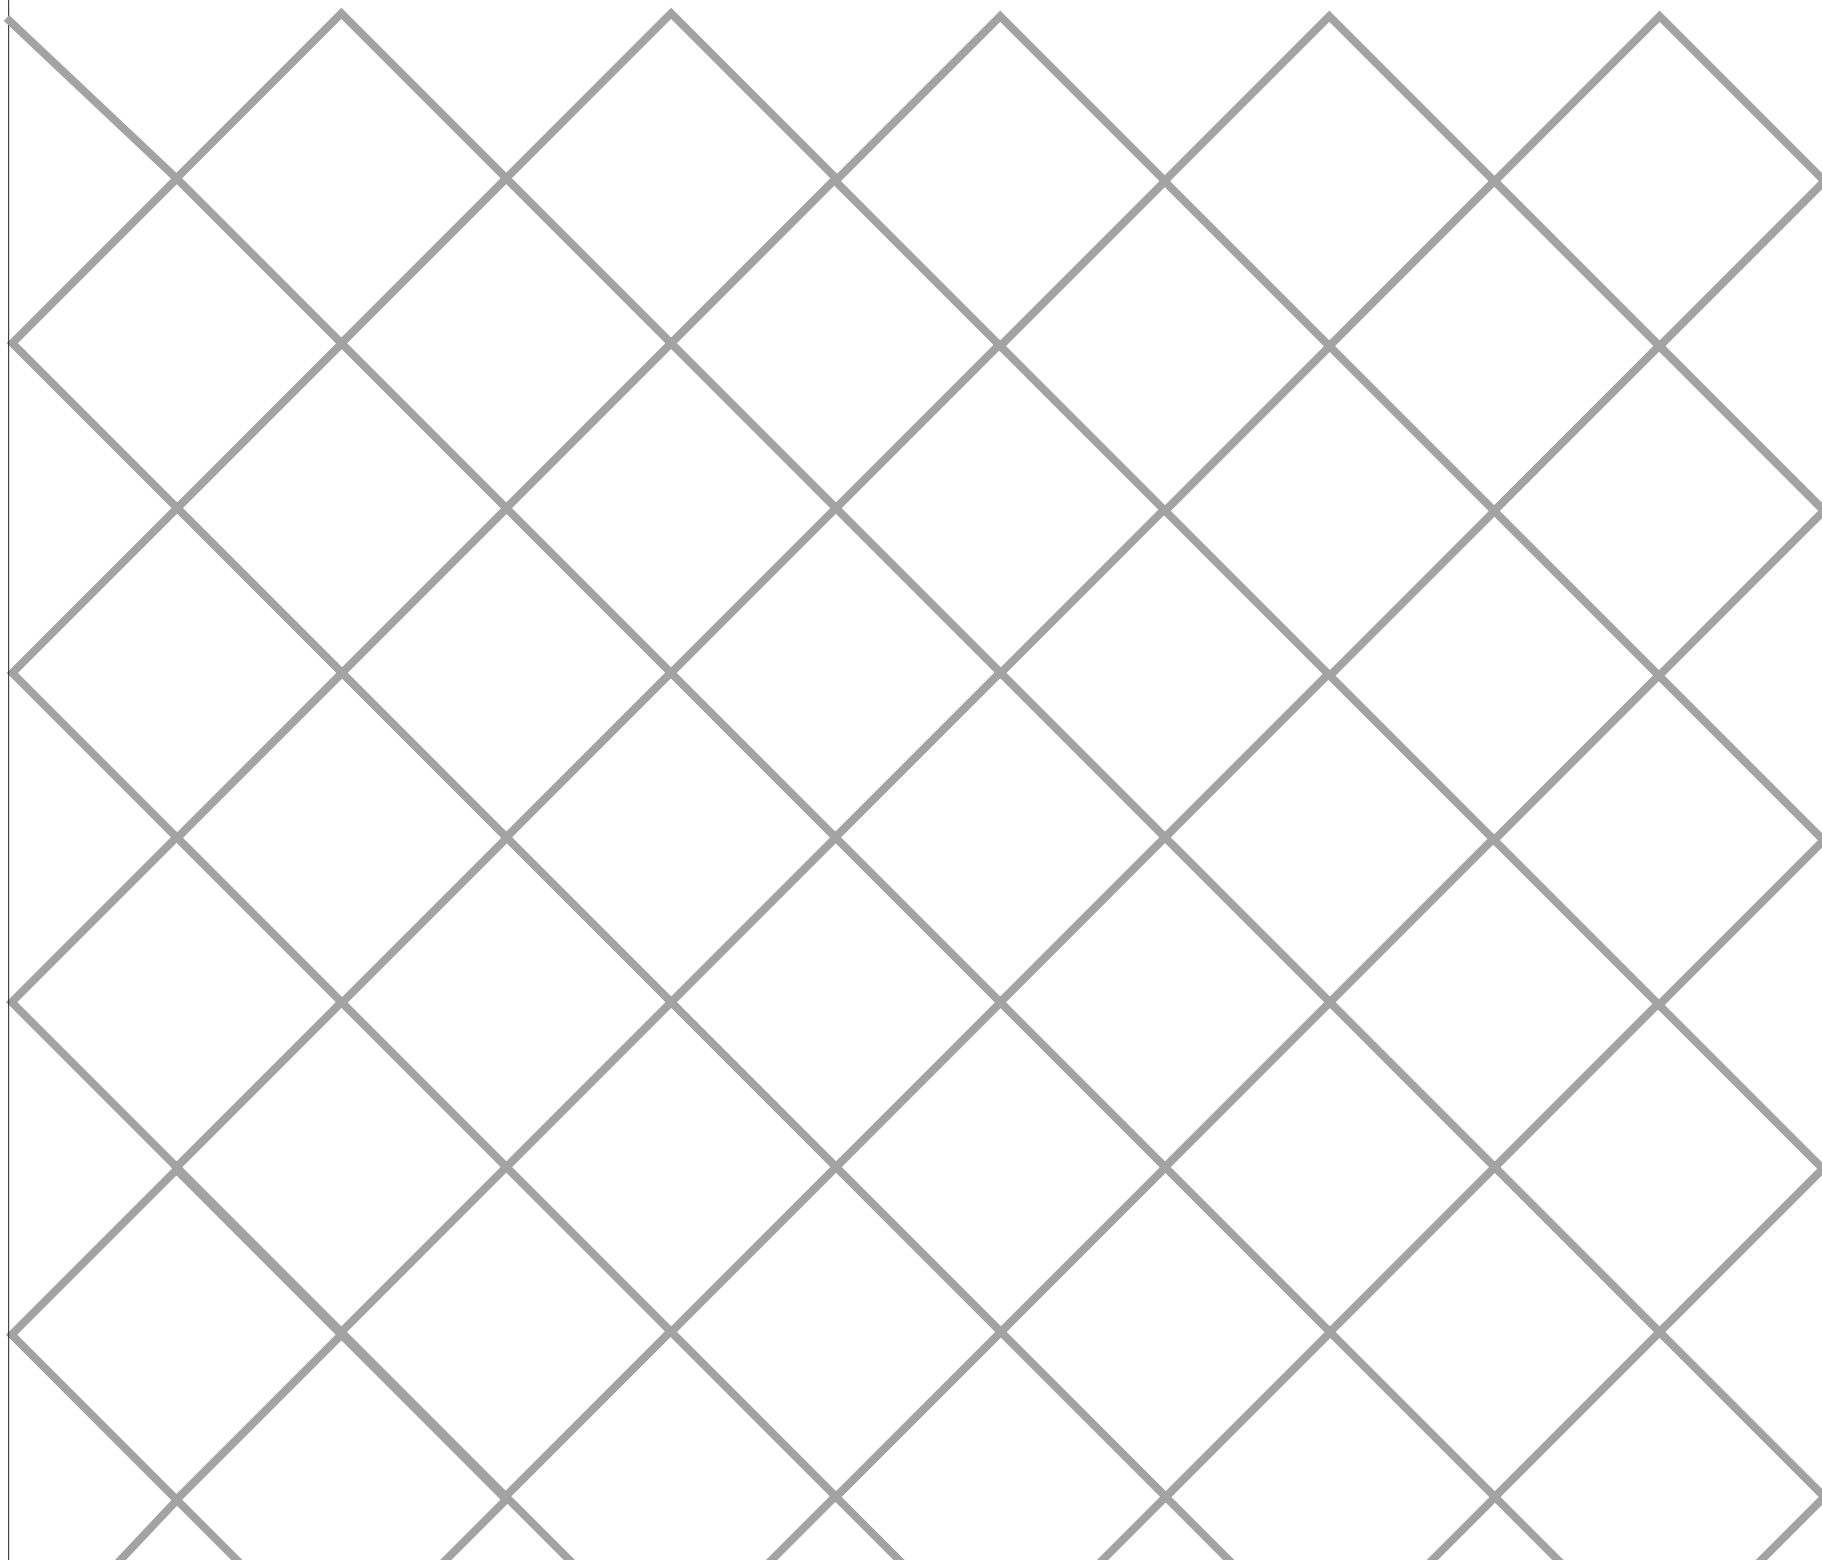

KT001




KT002



KT003



KT004

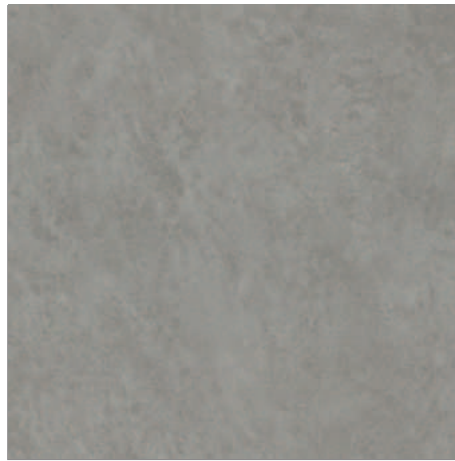

KT005



KT007



KT008



KT009



KT016



KT017



KT018




KT019



AB001




AB002

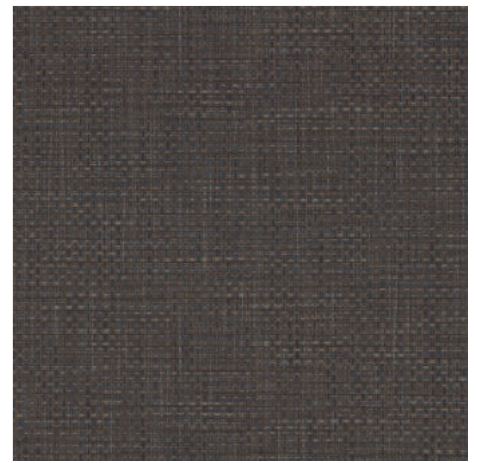


AB003



AB004

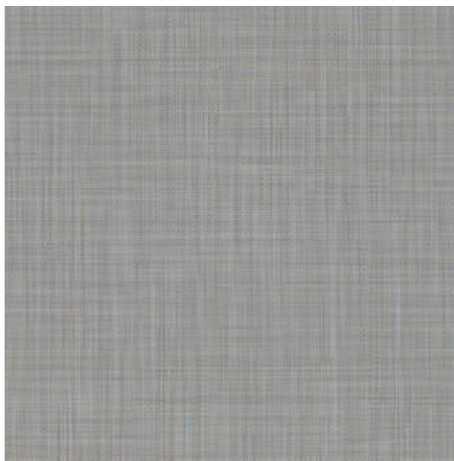

AB005

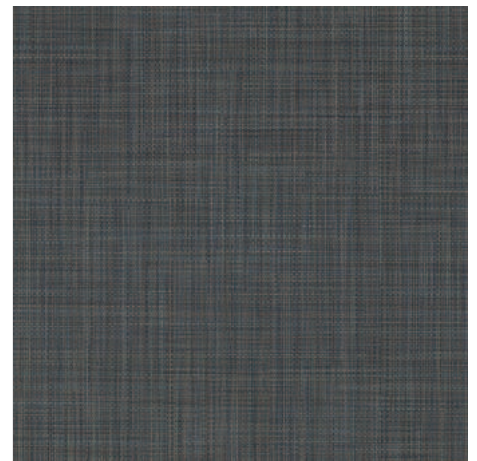

AB006



TZ001

GLUE DOWN PRODUCT STRUCTURE



Creates special space with differentiated design and pattern




Strong at dent and scratch



Easy cleaning and maintenance with special surface treatment



Maintain eco friendly space with no harmful chemical

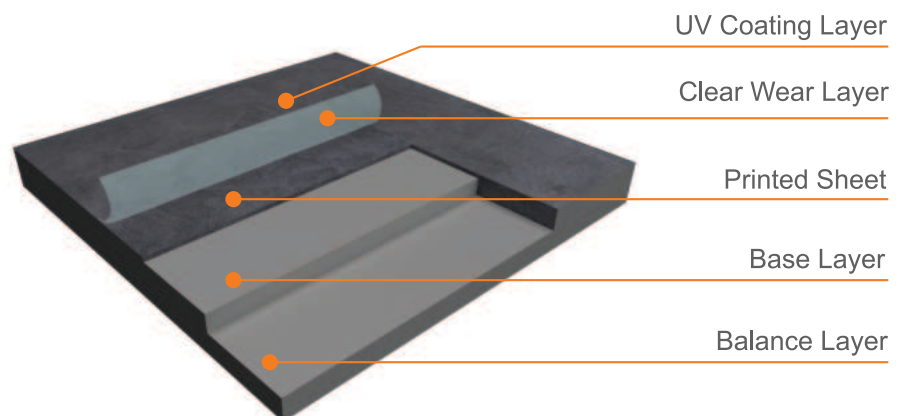

GLUE DOWN

Product Specification and Technical Data



Property	Standard	Glue Down
Type & Composition		PVC Laminated Floor covering
Application		Commercial, Residential
Surface treatment		PU & UV with Anti-Bacterial
Tile Size	EN427 / ASTM F2055	470 x 470 mm (18.5" x 18.5")
Total thickness	EN428	3.0 mm
Wear layer thickness	EN429	0.3 mm
Weight		5.03 kg / sq.m.
Classification	EN685 / EN ISO 1582	23 : Domestic
		31 : Commercial
Reaction to Fire	EN13501-1	Bfi - S1
	ASTM E648	Class1
Color fastness	ISO 105 - B02	≥ 6
Dimensional stability	EN434	Pass
Flexibility	EN435	Pass
Slip resistance	DIN 51130	R10

Stain&Chemical Resistance(KSM3802.,24hr-Exposure)

MATERIAL	RATING	MATERIAL	RATING
95% Ethyl Alcohol	0	Nitric Acid 70%	1
Cement Paste	0	Sulfuric Acid 96%	1
10% Ammonium Hydroxide	0	Methylence Chloride	2
Milk	0	Soy Sauce	0
5% Acetic Acid	0	Soy Bean Oil	0
5% Hydrochloric Acid	0	Lubricant	0
Kerosene	0	Coffee	0
Sesame Oil	0	Tea	0
Acetone	2	Ketchup	0
Nail Polish Remover	2		

DISTRIBUTED BY :



DISTRIBUTED BY :

UNICOM IMPORT-EXPORT CO., LTD.

888 Moo 13, Bangna-Trad Rd., Soi 45, Bangkaew, Bangplee, Samutprakarn 10540 THAILAND

TEL : (66-2) 316 3199 FAX : (66-2) 316 3199 # 8199

www.unicom.co.th