

Electrical parts availability

Standard Coil Mono-Frequency, F class, IP65 with Connector

Encapsulated in synthetic material, Connector for 2P + E DIN 43650 A Plug.

Voltage	Power Consumption	Approvals	Description	Part Number	Dimensional Drawing
24/50	8 W	-	481865A2	439500	27
48/50	8 W	-	481865A4	439515	27
110/50	8 W	-	481865A5	439514	27
220-230/50	8 W	-	4818653D	439502	27
380/50	8 W	-	481865A9	439531	27
24/60	8 W	-	481865B2	439804	27
230/60	8 W	-	481865J3	439530	27
115/60	8 W	-	481865K8	439528	27
12 DC	9 W	-	481865C1	439508	27
24 DC	9 W	-	481865C2	439501	27
48DC	9 W	-	481865C4	439523	27
110V DC	9 W	-	481865C5	439532	27

Standard Coil Bi-Frequency, F class, IP65 with Connector

Encapsulated in synthetic material, Connector for 2P + E DIN 43650 A Plug.

Voltage	Power Consumption	Approvals	Description	Part Number	Dimensional Drawing
12/50-60	9 W	-	4835101W	439812	27
24/50-60	9 W	-	483510P0	439503	27
48/50-60	9 W	-	483510S4	439526	27
110-115/50 120/60	9 W	-	483510S5	439507	27
220-240/50 240/60	9 W	-	483510S6	439504	27

UL approved Coil, F class




Encapsulated in synthetic material, Connector for 2P + E DIN 43650 A Plug.

Voltage	Power Consumption	Approvals	Description	Part Number	Dimensional Drawing
24/60	13 W	UL	491514B2	439511	27
24DC	16 W	UL/VDE	491514C2	439520	27
110/50 120/60	13 W	UL	491514P3	439512	27
220/50 240/60	13 W	UL	491514Q3	439513	27



H class Coil, IP65 with Connector

(DC, AC 14W) encapsulated in synthetic material. Connection for 2P + E DIN 43650 A plug.

Voltage	Power Consumption	Approvals	Description	Part Number	Dimensional Drawing
24/50	14 W	-	492425A2	439550	27
110/50	14 W	-	492425A5	439551	27
230/50	14 W	-	492425F4	439518	27
24DC	14 W	-	492425C2	439522	27

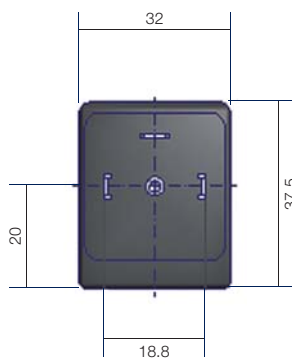

Dimensional Drawing N° 27

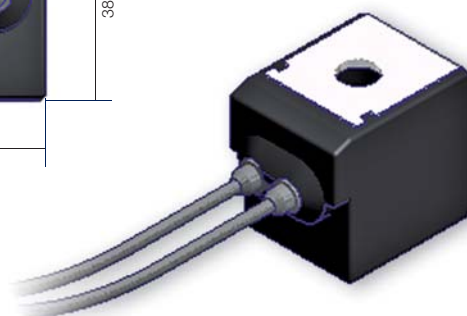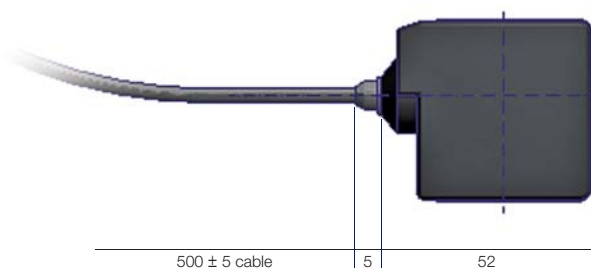

All quotes are in mm

Dimensional Drawing N° 28