


FPA - 318

Feeder Precision Auto

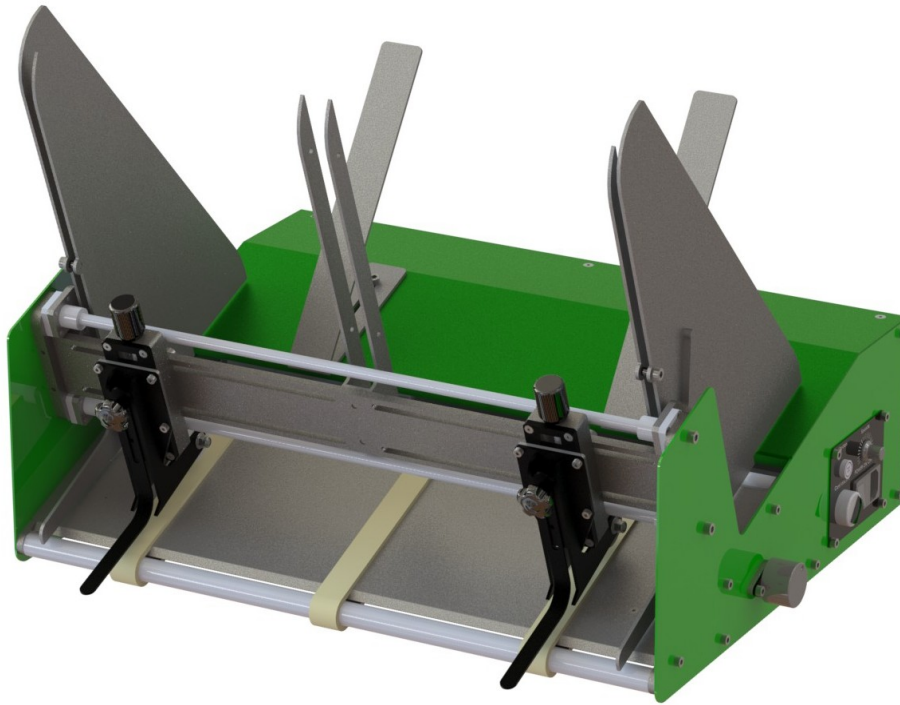

Overview

The most reliable and safest continuous TIJ feeder in the market today

With CE approval, you can be assured that you have the safest machine both mechanically and electrically and we back it with a two-year limited warranty. The V-1000 is capable of feeding flat and multi-thickness products into mail production streams consistently at high speeds with exceptional alignment qualities. The importance of straight feeding and minimizing skewing can help improve USPS® MERLIN™ verification results, leading to significant savings for a mailing service company.

Feed a wide variety of flat and multi-thickness products into production mail streams including inkjet addressing systems, tabbers, labelers, and more.

Standard Features

Repositionable feed belts , Independent side guide positioning ,Extended guide rails all the way through the feeder , Two independent adjustable product separators , Long lasting natural gum rubber feed belts , Variable speed control , Universal external run interface kit



Technical Data

FPA - 318

Specification

- Maximum Product Size : 500W x 850L mm.
- Minimum Product Size : 40W x 150L mm.
- Product thickness : 0.055-12.000 mm.
- Belt Speed : 60 m/min
- Utilities : 220 Volt, 50/60 Hz. 3A
- Weight 39.8 kg.
- Warranty 1 Year



Applications *(ask us about your application)*

Addressing	Scanning	Coding
Labeling	Tabbing	Printing

Products *(ask us about your product)*

Sheet Paper	Backer Board	Folders
Manuals	Cardstock	Envelopes
Collapsed Cartons	Post Cards	Bookbank
Brochures	and more.....	

Dimension

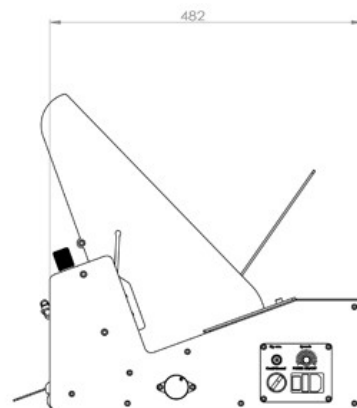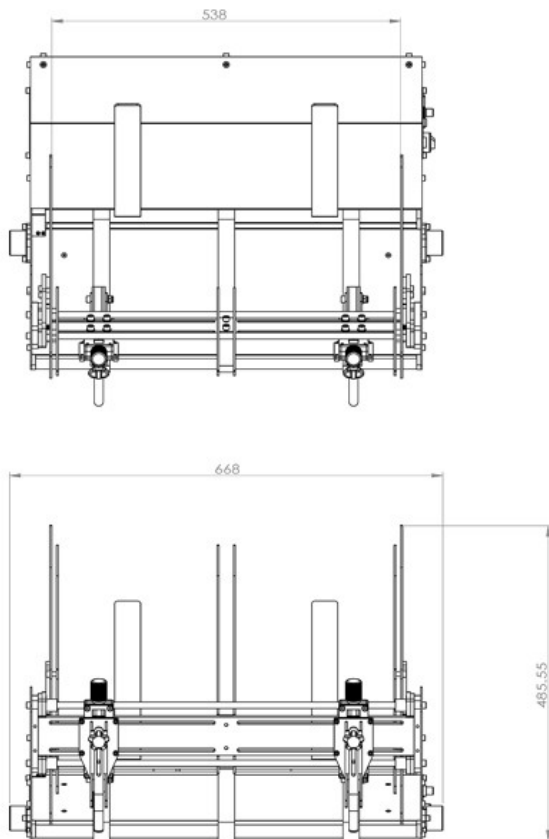

Pro Pak Precision Ltd.

555/112 Sai-Mai, Sai-Mai 10220

Thailand

Phon : +66(0)2-990-5986

www.propakprecision.com E-Mail : infopropakprecision@gmail.com