






5.00/10.00mm

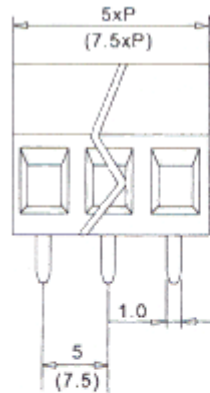

**JK128-500、JK128-750**

**Material**

Contact (metal housing)	: Steel stamping zinc die Casting or Brass Machined ( Option )
Terminal screw	: Steel Galvanized and chromitized of Nickel plated or Tin plated (Standard option)
Surface of solder tail	: Brass With Tin Plated
Insulator body (housing)	: Polyamide(Glass filled) (UL94V-0)

**Electrical**

Voltage rating	: 300VAC
Current rating	: 10Amps/way max.
Insulation resistance	: 5000M $\Omega$ /1000V
Wire range	: 12-24AWG
Operation temperature	: -33 $^{\circ}$ C to +120 $^{\circ}$ C
Torque	: 4kg-cm/M2.5
Safety approval	: 