



Spark Free
Refrigerator/Freezer



Typical Installation

Spark free refrigerators are installed typically in many different laboratories and research facilities to store chemical or experimental reagents that are flammable, explosive, evaporative or corrosive.



Product Advantages

ATEX II C-T6 E.U. Explosion Proof Certification

Explosion proof features include antistatic liner, gasket, explosion proof fan motor, over current and voltage protection. ATEX II C-T6 explosion proof certification for Haier's laboratory refrigerator ensures safety in your work place.

3~16°C Setting Temperature Range

Smart temperature control system limits the temperature variance within $\pm 3^{\circ}\text{C}$. Adjustable set point for the range of $3^{\circ}\text{C} \sim 16^{\circ}\text{C}$, factory default set temperature is 5°C , controlling the temperature inside the chamber is $2 \sim 8^{\circ}\text{C}$.

One-touch Search for Historic Data

The highest and lowest historic temperature data is saved and can be checked with one key stroke.

High Efficiency HC Cooling Technology

The hydrocarbon refrigeration system operates at a much higher efficiency and reduces the energy consumption by about 50 percent.

Ergonomic Design

High Strength Glass Shelves

Tempered glass shelves hold 40 kg of products per shelf.

Low Noise

Noise cancelling technology reduces the sound level to less than 40 dB(A) for a much-improved environment.



Dual Lock Design with Multiple Alarm Systems

A mortise lock is standard on the door. Standard alarms include high and low temperature, door ajar, and sensor errors.


<p>Cabinet Structure</p>	<p>Glass Shelve</p>	<p>ATEX Certification Label</p>	<p>Explosion Proof Cabinet/Fan</p>
<p>Cabinet Structure</p>	<p>Glass Shelve</p>	<p>ATEX Certification Label</p>	<p>Explosion Proof Cabinet/Fan</p>

Spark Free Refrigerator

Application Range

Haier spark free refrigerators are ATEX certified in the application range II 3G Ex ic nA II T6, which means the appliances can be found in the whole II zone environment (including II A and II B, II C), a typical environment within many biochemistry laboratories.

Explosive-proof Rating

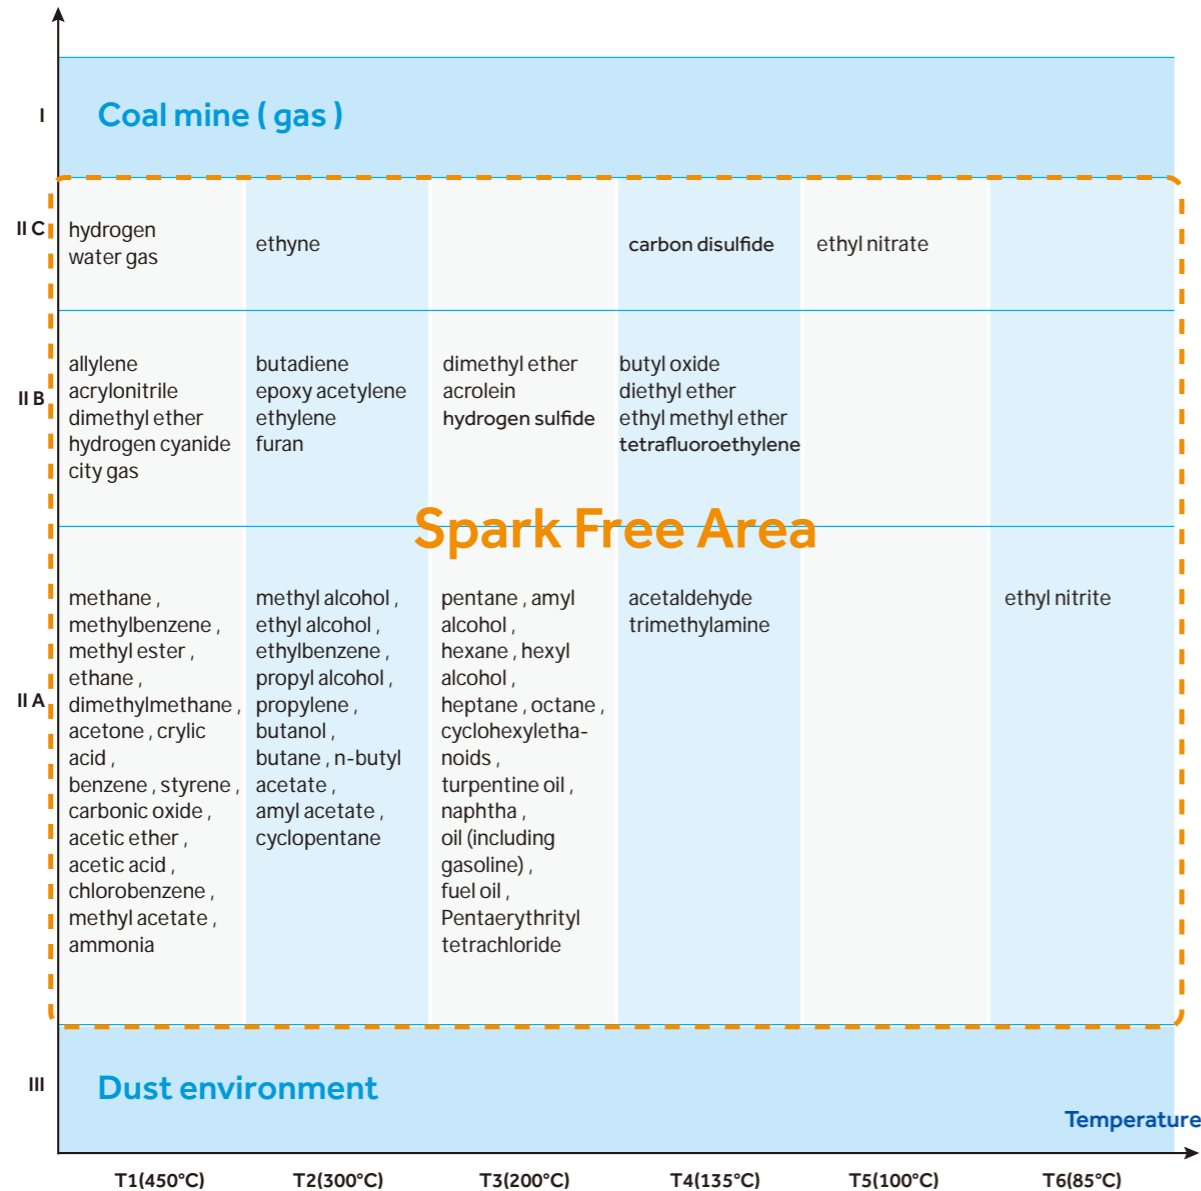

Warning: Do not store open containers of volatile substances in this refrigerator.

Specifications

Model	HLR-118SF	HLR-310SF	HLR-118FL	HLR-310FL
Technical Data	Type: Under-Counter	Upright	Under-Counter	Upright
Climate Class	N	N	N	N
Cooling Type	Forced Air Cooling	Forced Air Cooling	Forced Air Cooling	Forced Air Cooling
Defrost Mode	Auto	Auto	Auto	Auto
Refrigerant	R600a	R600a	R600a	R600a
Sound Level (dB(A))	40	40	40	40
Performance	Temperature Range (°C)	3-16°C Adjustable	3-16°C Adjustable	3-16°C Adjustable
Ambient Temperature (°C)	16-32	16-32	16-32	16-32
Control	Controller	Microprocessor	Microprocessor	Microprocessor
Display	LED	LED	LED	LED
Electrical Data	Power Supply (V/Hz)	220-240/50	220-240/50	220-240/50
Power (W)	55	210	55	210
Electrical Current (A)	1.2	1.26	1.2	1.26
Power Consumption (kWh/24h)	0.56	1.05	0.56	1.05
Construction	Capacity (L/Cu.Ft)	118/4.2	310/10.9	118/4.2
Net/Gross Weight (approx)	kg	44/49	72/83	44/49
	lbs	97/108	158.7/183	97/108
Interior Dimensions (W*D*H)	mm	515*415*630	560*500*1290	515*415*630
	in	20.3*16.3*24.8	22.0*19.7*50.8	20.3*16.3*24.8
Exterior Dimensions (W*D*H)	mm	597*635*810	605*598*1840	597*635*810
	in	23.5*25*31.9	23.8*23.6*73.6	23.5*25*31.9
Packing Dimensions (W*D*H)	mm	680*690*910	660*670*2020	680*690*910
	in	26.8*27.2*35.8	26*26.4*79.5	26.8*27.2*35.8
Loading Quantities	Container Load (20'/40'/40'H)	48/96/96	24/51/51	48/96/96
Alarms	High/Low Temperature	Y	Y	Y
	Power Failure	Optional	Optional	Optional
	Sensor Error	Y	Y	Y
	Door Ajar	Y	Y	Y
Accessories	Caster	2	4	2
	Foot	2	2	2
	Shelves/Baskets	2/1	4/0	2/1
	Water Tray	1	1	1
	Padlock Adapter Kit/Quantity	/	1	/
	Built-in Key Door Lock/Quantity	1	1	1
Certification	Remote Alarm	Optional	Optional	Optional
CE	Y	Y	Y	Y
ATEX	Y	Y	Y	Y

Product appearance and specifications are subject to change without notice

-30°C Spark Free Freezer

Typical Installation

It can be used for safe storage of potentially flammable items and other temperature sensitive samples at low temperatures. Applications found within life science, medical, electronics and chemical industries.



DW-30L278SF



DW-30L278SF/FL

Product Advantages

Explosion Proof Interior

The SF series is composed of a non-anti-static liner, door lining and drawers; the FL series is composed of an anti-static liner, door lining and drawers. Equipped with an overcurrent and overvoltage protection system with all components earthed to ensure static is discharged safely. Certified to ATEX IIC-T6 EU and can be used in zone 2 environments.

Hydrocarbon Energy-saving


- Utilizing a hydrocarbon compressor and hydrocarbon refrigerant resulting in a more eco-friendly refrigeration system.
- Cyclo-isopentane foaming polyurethane insulation and manufactured with materials that comply with the European ROHS directive for environmental protection.
- The hydrocarbon energy-saving and high-efficiency compressor results in an optimized refrigeration system which is more energy efficient than older models.


Excellent Temperature Uniformity

An evaporator shelf design is adopted inside the freezer whereby the evaporation plate serves as a shelf, to ensure faster cooling and a more uniform temperature. The temperature uniformity at points throughout the unit is $\pm 4^{\circ}\text{C}$.

Low Noise

Cabinet structure and refrigeration system noise reduction design lowers noise level to less than 40dB(A) and eliminating any harsh high-frequency noises.


Laboratory Deep Freezer with explosion-proof interior
 Interior Temp. Range : -10 ~ -25 °C (DW-25L92FL/SF)
 -10 ~ -30 °C (DW-30L278FL/SF)
 Internal  IIC-T6 Gc
 Certification No.: CML 18ATEX4058X
 Serial No. in the Barcode
 Haier Medical and Laboratory Products Co., Ltd. 

Anti-static operating instruction
 1. Clean plastic parts with a damp cloth only.
 2. Do not use a dry cloth to clean plastic parts.
 3. Danger of sparks due to electrostatic discharge.
 4. Warning - potential electrostatic charging hazard - see instructions. 

-30°C Spark Free Freezer

99/100

Key Features



Microprocessor-controlled system

- Microprocessor electronic thermostat, LCD temperature display to an accuracy of 0.1°C;
- Adjustable set point of between -10~-30°C;
- Alarm functions include a high and low temperature alarm, sensor error alarm and power failure alarm;
- Audible and visual alarm;
- Display/Alarm is battery backed up for 24 hours in the event of a power failure.



Good thermal insulation

The super-thick insulation layer and removable door gasket design improves the thermal insulation and energy-saving effects to enhance the reliability of the freezer.



Safety lock

Dual-lock design of lock catch and key lock. An external padlock can be added for additional security.



Warning sticker

The SF series adopts the non-anti-static liner and front-operated yellow warning sticker to warn users about safe operation requirements and ensure safe use.



Drawers

The SF series of freezer are provided with six plastic drawers and the FL series are provided with six drawers made of anti-static materials. Each drawer has a warning sticker slot to meet different storage and identification requirements.



Caster

Caster and levelling feet design, easy to move and fix in place.

Specifications

Model	DW-30L278SF	DW-30L278FL		
Technical Data	Cabinet Type	Upright	Upright	
	Climate Class	SN N	SN N	
	Cooling Type	Direct Cooling	Direct Cooling	
	Defrost Mode	Manual	Manual	
	Refrigerant	HC	HC	
	Sound Level(dB(A))	40	40	
Performance	Cooling Performance(°C)	-30	-30	
	Temperature Range (°C)	-10~-30	-10~-30	
Control	Controller	Microprocessor	Microprocessor	
	Display	LCD	LCD	
Electrical Data	Power Supply(V/Hz)	220-240/50	220-240/50	
	Power(W)	330	330	
	Electrical Current(A)	2.0	2.0	
Construction	Capacity(L/Cu.Ft)	278/9.8	278/9.8	
	Net/Gross Weight(approx)	kg	115/135	115/135
		lbs	254/298	254/298
	Interior Dimensions(W*D*H)	mm	520*435*1230	520*435*1230
		in	20.5*17.1*48.4	20.5*17.1*48.4
	Exterior Dimensions(W*D*H)	mm	745*675*1810	745*675*1810
		in	29.3*26.6*71.3	29.3*26.6*71.3
	Packing Dimensions(W*D*H)	mm	805*725*1970	805*725*1970
in		31.7*28.5*77.6	31.7*28.5*77.6	
Loading Quantities	Container Load (20'/40'/40'H)	23/46/46	23/46/46	
Alarms	High/Low Temperature	Y	Y	
	Remote Alarm	/	/	
	Power Failure	Y	Y	
	Sensor Error	Y	Y	
	Door Ajar	/	/	
Accessories	Caster	Y	Y	
	Foot	Y	Y	
	Drawers/Inner Doors	6/-	6/-	
Others	Certification	CE ATEX	CE ATEX	
	Interior Material/Colour	PS Plate/Grey	Antistatic PS Plate/Black	

Product appearance and specifications are subject to change without notice