


อุปกรณ์ฐานติดลอย 4 ขั้ว รุ่น FZB013-4 ยี่ห้อ NOHMI  
"NOHMI" DETECTOR BASE MODEL FZB013-4


**RATE-OF-RISE HEAT DETECTOR FDPJ SERIES** CAT. NO. D-F-15400

**TYPICAL WIRING DIAGRAM**

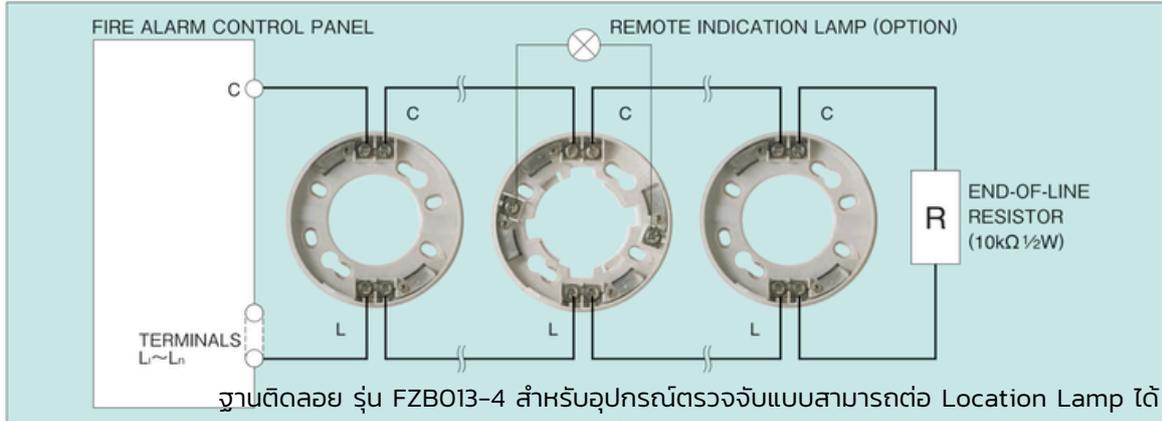


- Maximum number of detectors to be connected : No limit.
- External wire resistance : Less than 50Ω/line

**TYPICAL MOUNTING (SURFACE MOUNTING TYPE)**

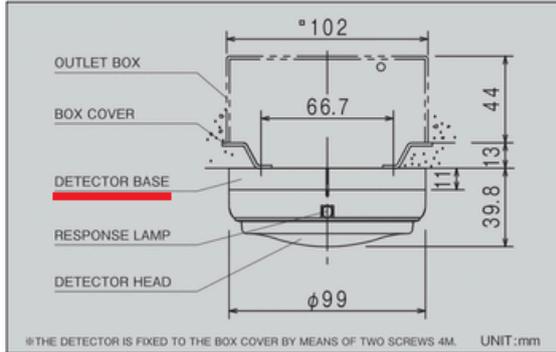

**TYPICAL MOUNTING (RECESS MOUNTING TYPE)**

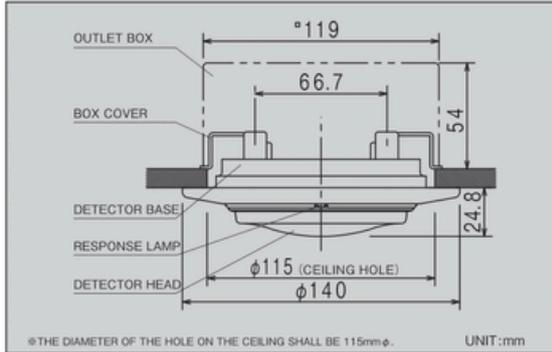

**COVERAGE AREA PER DETECTOR**

HEIGHT BETWEEN FLOOR AND MOUNTING SURFACE		CLASS 1	CLASS 2
Less than 4m	Fire-Resistant Building	90m <sup>2</sup>	70m <sup>2</sup>
	Other Building	50m <sup>2</sup>	40m <sup>2</sup>
4m~8m	Fire-Resistant Building	45m <sup>2</sup>	35m <sup>2</sup>
	Other Building	30m <sup>2</sup>	25m <sup>2</sup>

**ORDERING INFORMATION**

DETECTOR HEAD		SURFACE MOUNTING BASE		RECESS MOUNTING BASE	
Model	Type	Model	Type	Model	Type
FDPJ106-D	Ordinary, Class1	FZB013-2 FZB018-2	2 terminals (screw type) (Insertion type)	FZB060-2	2 terminals (Insertion type)
FDPJ206-D	Ordinary, Class 2				
FDPJ206-D-T	w/Remote testing mechanism, Class2				
FDPJ206-D-M	w/Response lamp holding circuit, Class2	FZB013-4 FZB018-4	4 terminals (screw type) (Insertion type)	FZB060-4	4 terminals (Insertion type)
FDPJ206-D-X	w/Remote indication circuit, Class2				

- These instructions do not purport to cover all the details or variations in the equipment described, nor provide for every possible contingency to be met in connection with installation, operation and maintenance.
- Specifications are subject to change without notice. Contact Nohmi before relying on above specifications.
- Actual performance is based on proper application of the product by a qualified professional.
- Should further information be desired or should particular problems arise, which are not covered sufficiently for the purchaser's purposes, the matter should be referred to Nohmi or a distributor in your region.

**NOHMI**  
NOHMI BOSAI LTD.

- HEAD OFFICE : 7-3, Kudan Minami 4-chome, Chiyoda-ku, Tokyo 102-8277, Japan
- PHONE : (81) 3-3265-0231
- F A X : (81) 3-3265-5348
- U R L : <http://www.nohmi.co.jp/english/>

110420D-F-15400Y02