




CONNEX CABLE GLANDS




BRASS NICKEL COATED CABLE GLAND PG TYPE

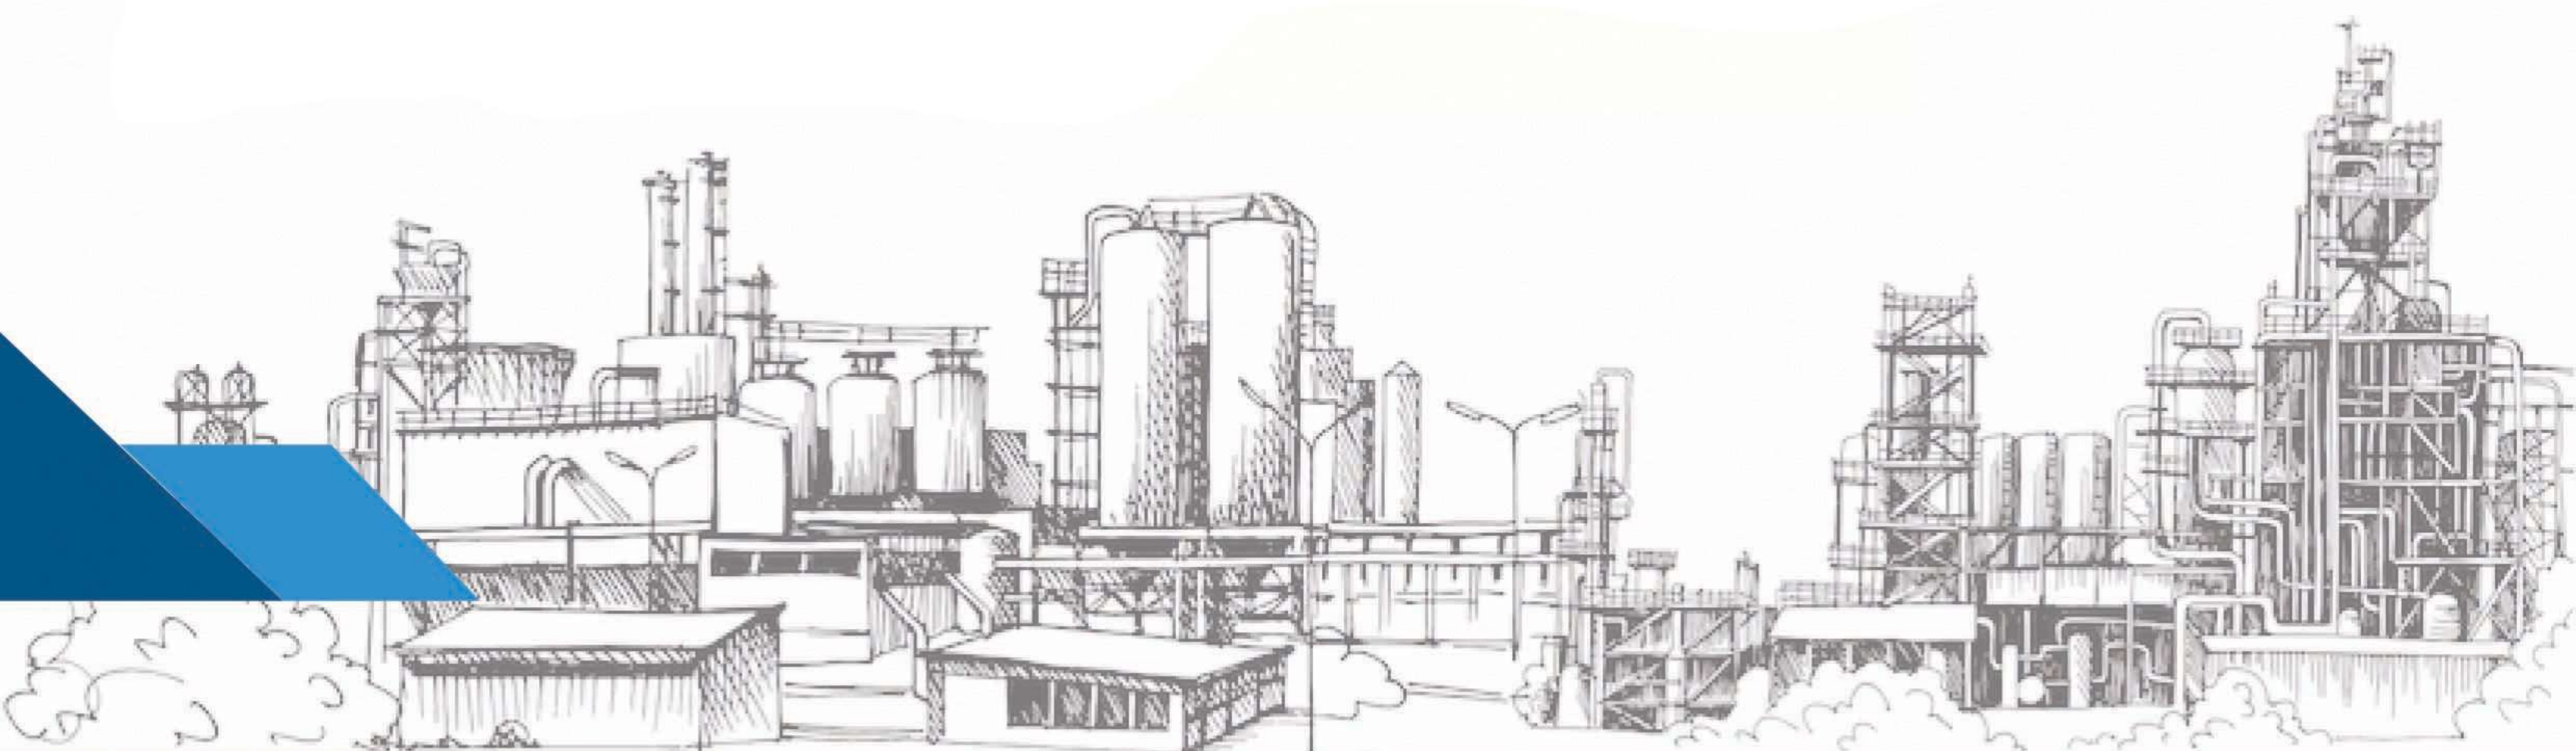

Thread Type: PG
Material: Brass Nickel Coated
Working temperature: -40°C to 100°C.
IP Protection: IP68

Thread Size	Clamping Size (mm.)	Thread O.D. (mm.)	Thread Length (mm.)	Spanner Size (mm.)
PG 7	3-6.5	12.5	7	14
PG 9	4-8	15.2	7	17
PG 11	5-10	18.6	8	20
PG 13.5	6-12	20.4	8	22
PG 16	10-14	22.5	8	24
PG 21	13-18	28.3	9	30
PG 25	15-22	30	9	32
PG 29	18-25	37	9	40
PG 36	22-32	47	10	50
PG 42	32-38	54	12	57
PG 48	37-44	59.3	12	64
PG 63	42-52	72.2	15	78

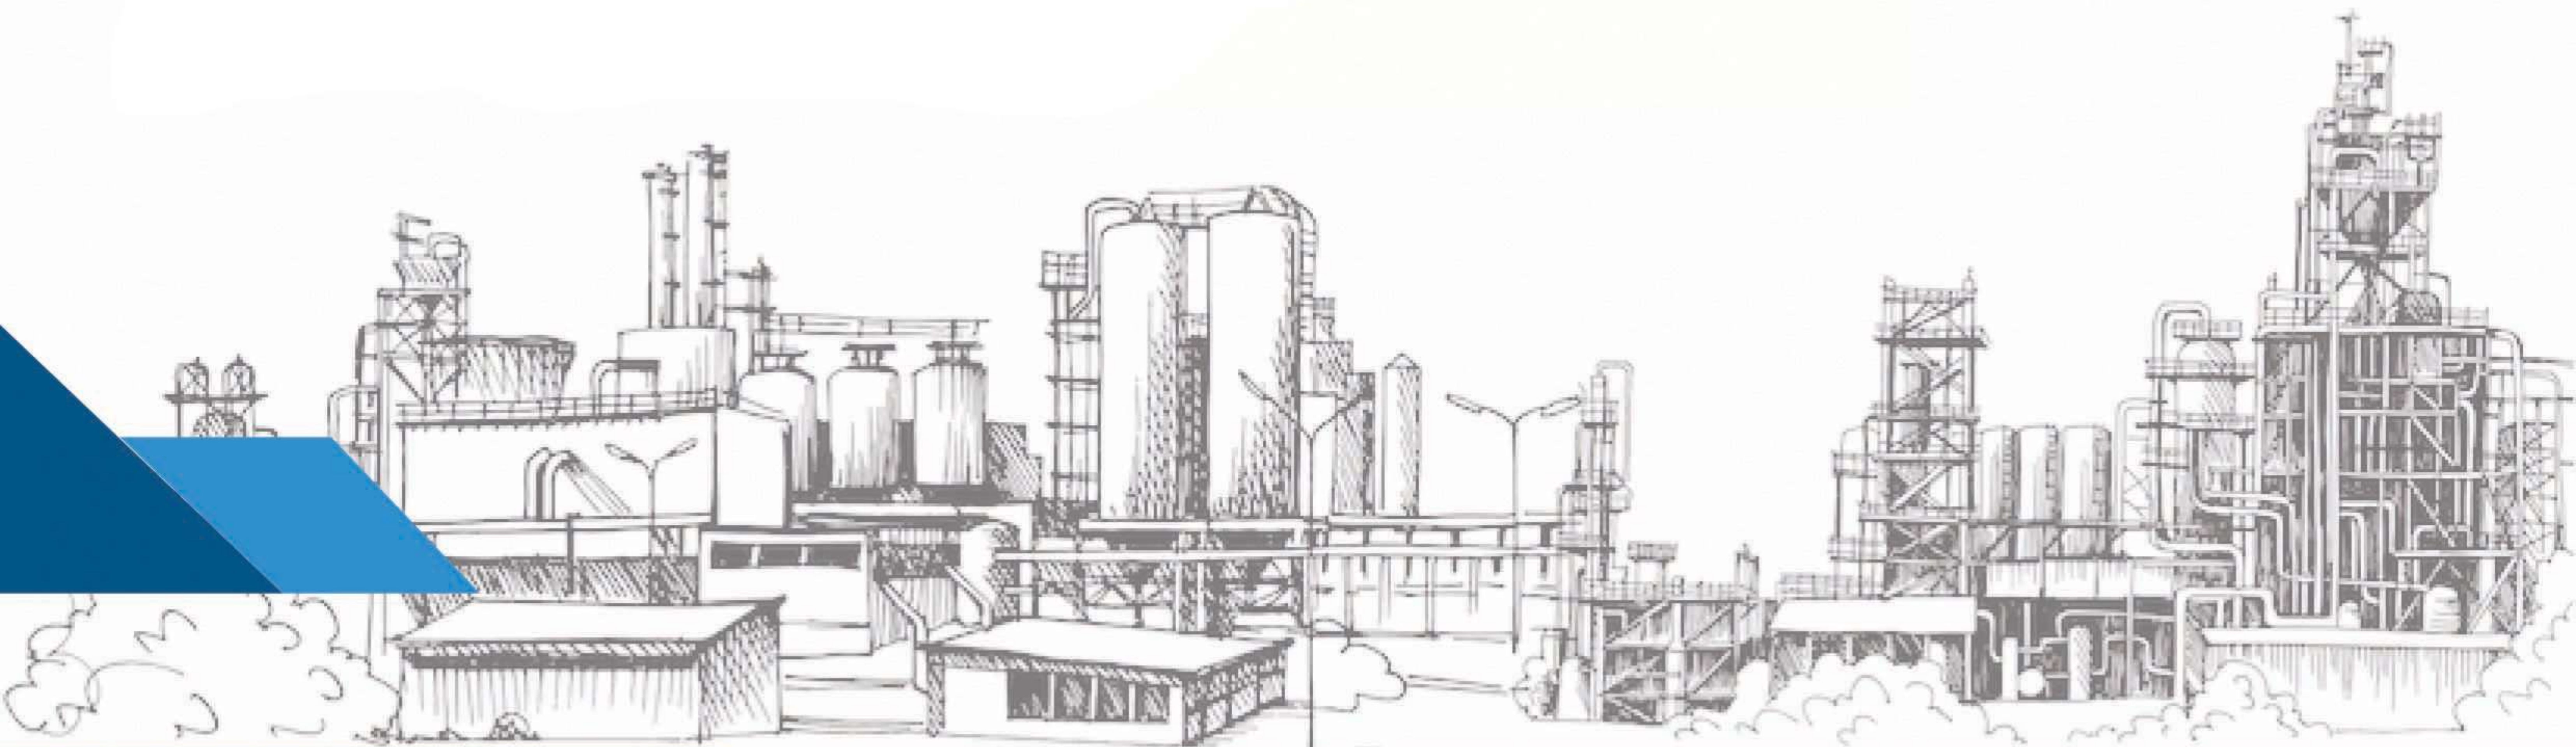

BRASS NICKEL COATED CABLE GLAND M TYPE




Thread Type: Metric

Material: Brass Nickel Coated

Working temperature: -40°C to 100°C.

IP Protection: IP68

Thread Size	Clamping Size (mm.)	Thread O.D. (mm.)	Thread Length (mm.)	Spanner Size (mm.)
M8 x 1	2-5	8	5	12
M8 x 1.25	2-5	8	5	12
M10 x 1	3-6.5	10	6.5	14
M10 x 1.5	3-6.5	10	6.5	14
M12 x 1.5	3-6.5	12	6.5	14
M14 x 1.5	4-8	14	8	17
M16 x 1.5	4-8	16	8	18
M18 x 1.5	5-10	18	8	20
M20 x 1.5	6-12	20	8	22
M22 x 1.5	10-14	22	8	24
M24 x 1.5	10-14	24	9	24/27
M25 x 1.5	11-16	25	9	24/27
M27 x 1.5	13-18	27	9	30
M28 x 1.5	13-18	28	9	30
M30 x 1.5	13-18	30	9	30/32
M32 x 1.5	15-22	32	10	35
M33 x 1.5	15-22	33	10	35/36
M36 x 1.5	18-25	36	10	40

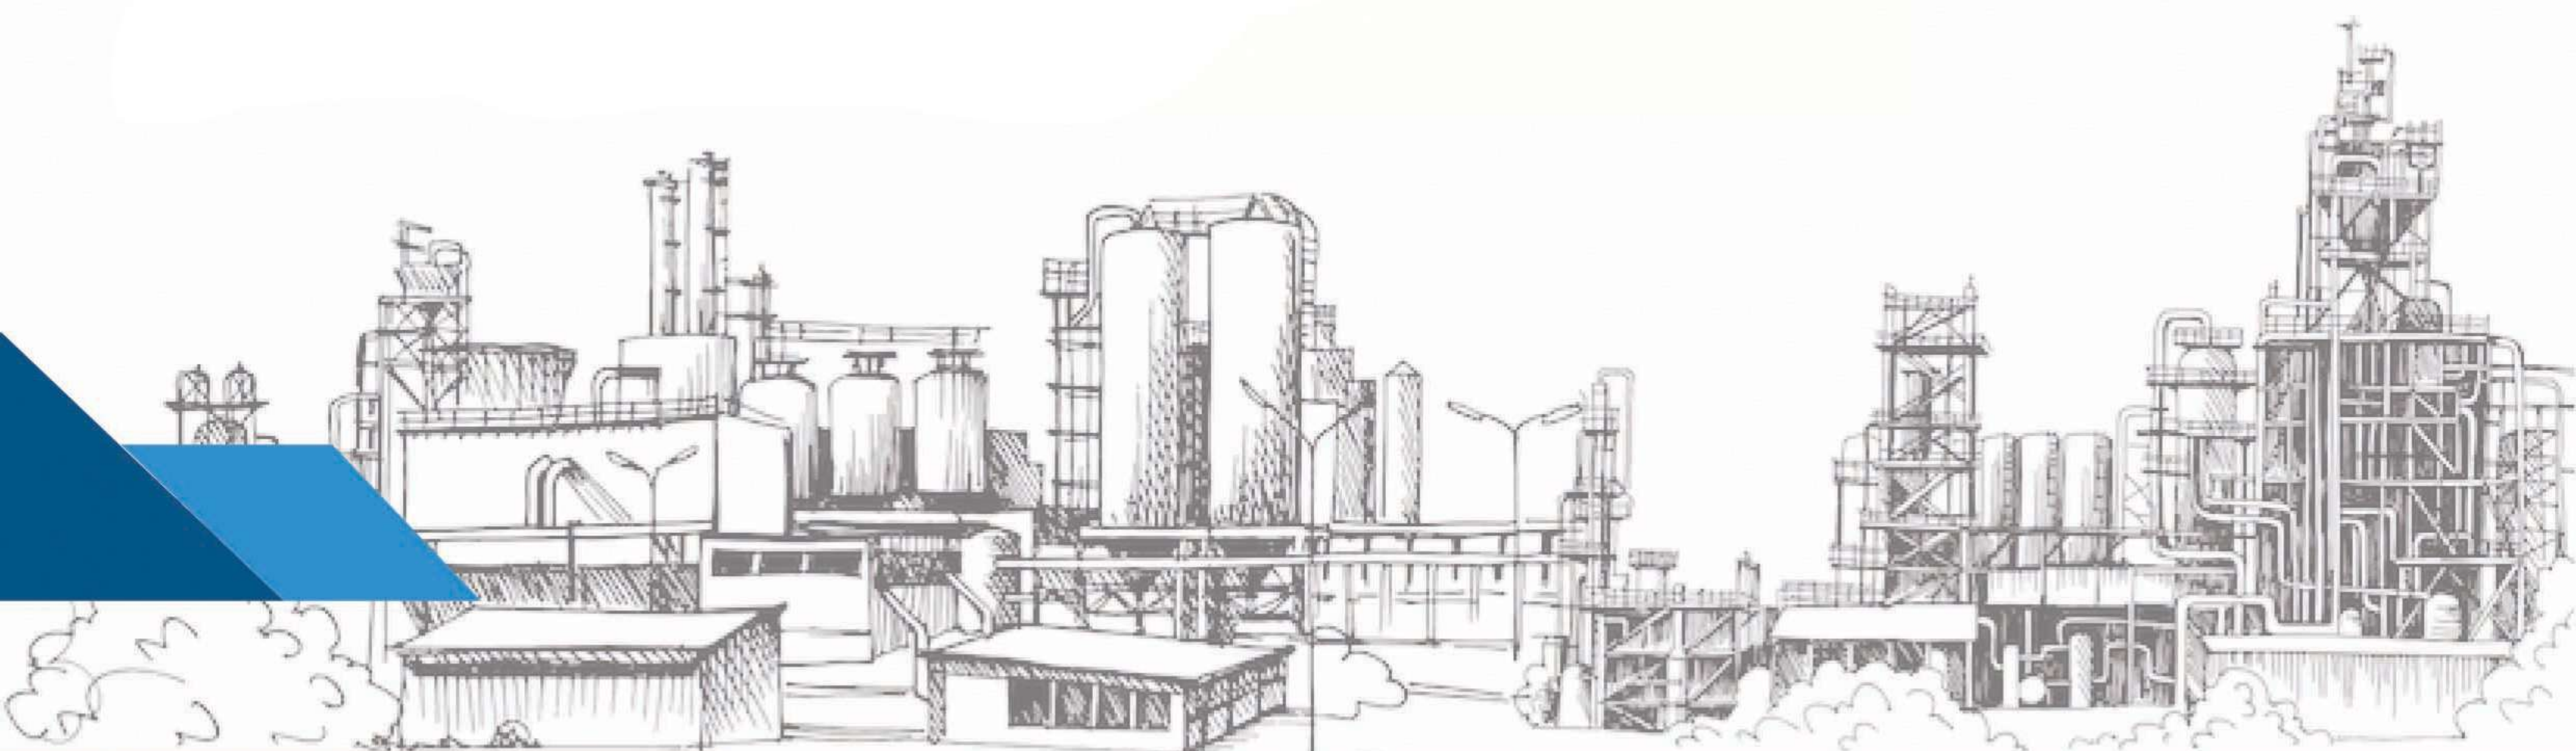

BRASS NICKEL COATED CABLE GLAND M TYPE


Thread Type: Metric

Material: Brass Nickel Coated

Working temperature: -40°C to 100°C.

IP Protection: IP68

Thread Size	Clamping Size (mm.)	Thread O.D. (mm.)	Thread Length (mm.)	Spanner Size (mm.)
M37 x 1.5	18-25	37	11	40
M40 x 1.5	18-25	40	11	40/45
M42 x 1.5	22-30	42	12	45
M47 x 1.5	25-33	47	12	50
M48 x 1.5	25-33	48	12	52
M50 x 1.5	32-38	50	14	52/54
M54 x 1.5	34-40	54	14	56/58
M56 x 1.5	36-42	56	14	60
M60 x 1.5	37-44	60	14	64
M63 x 1.5	37-44	63	14	64/68
M64 x 2	42-50	64	14	64/68
M70 x 2	42-52	70	16	78
M71 x 2	42-52	71	16	78
M72 x 2	48-58	72	16	78
M75 x 2	48-58	75	16	78/80
M80 x 2	55-62	80	18	78/80
M88 x 2	62-70	88	18	88
M90 x 2	62-70	90	18	94
M100 x 2	70-80	100	20	110

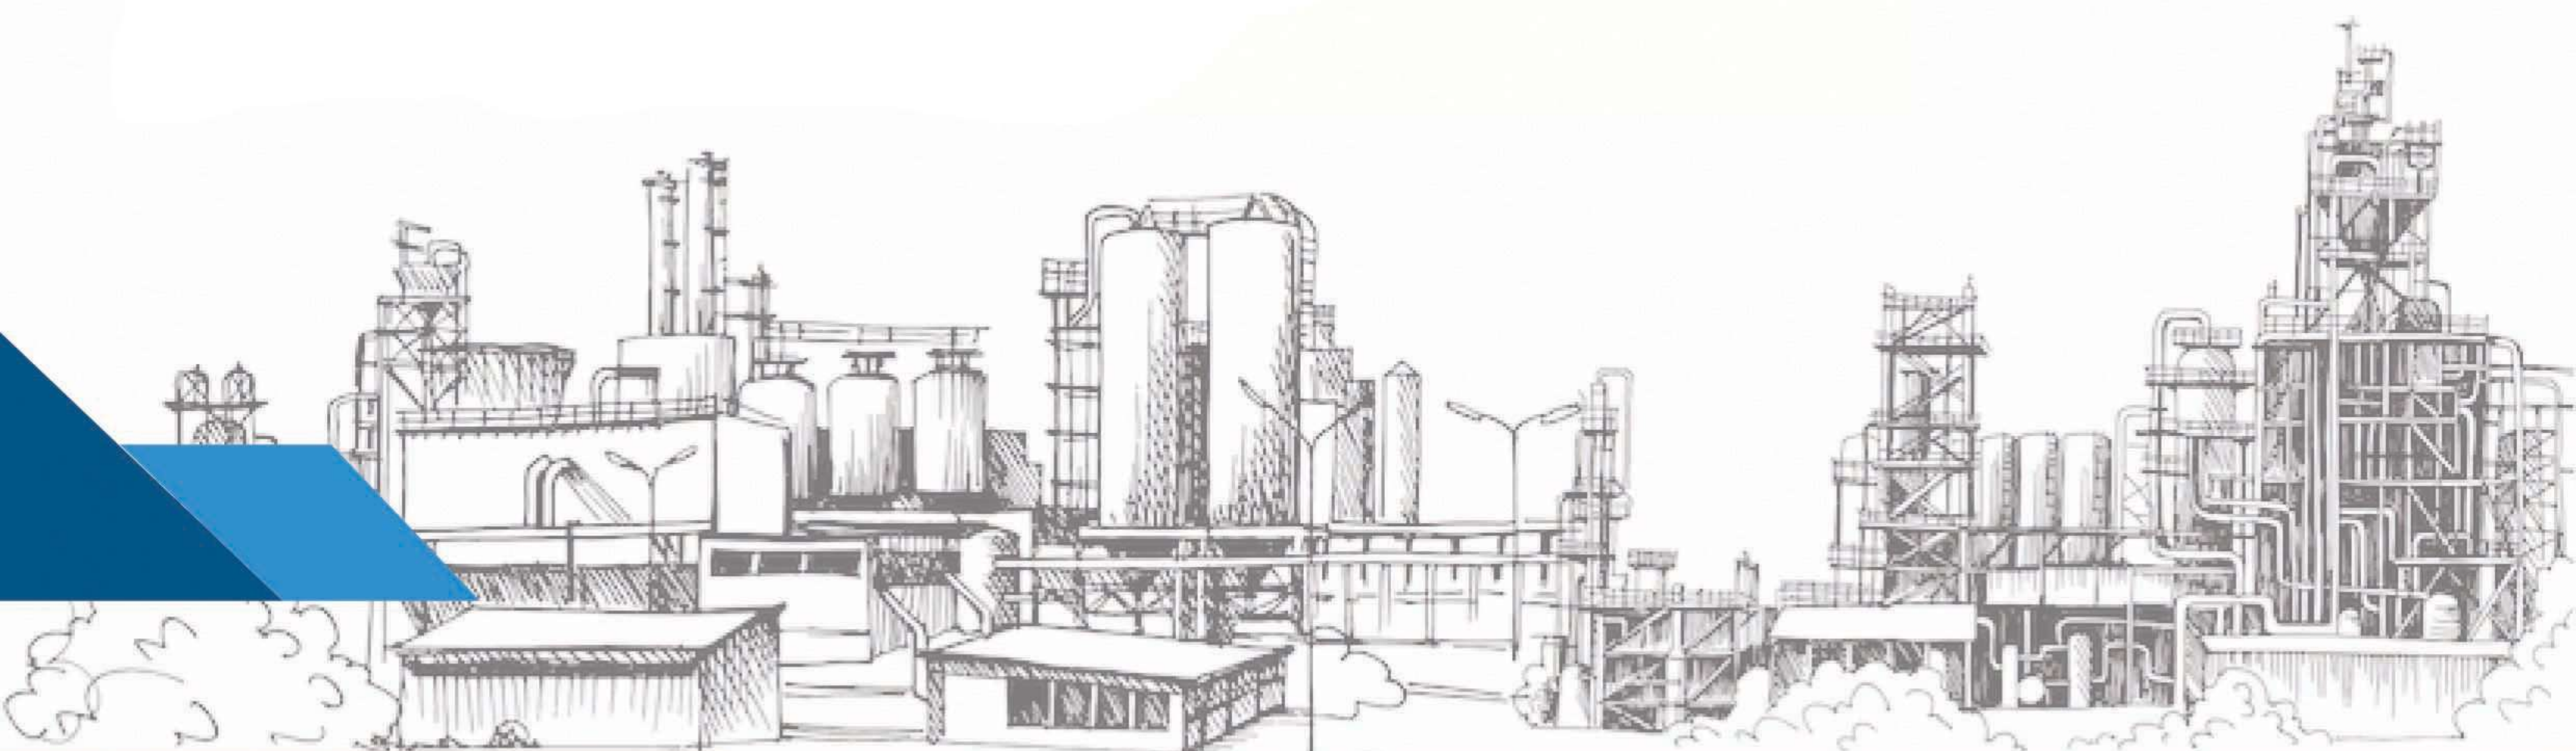

BRASS NICKEL COATED CABLE GLAND NPT TYPE




Thread Type: NPT

Material: Brass Nickel Coated

Working temperature: -40°C to 100°C.

IP Protection: IP68

Thread Size	Clamping Size (mm.)	Thread O.D. (mm.)	Thread Length (mm.)	Spanner Size (mm.)
NPT 1/4"	3-6.5	13.6	11	14
NPT 3/8"	4-8	17.0	11	17/20
NPT 1/2"	6-12	21.2	13	22/24
NPT 3/4"	13-18	26.5	13	30
NPT 1"	18-25	33.2	16	40
NPT 1-1/4"	22-33	41.9	16	50
NPT 1-1/2"	32-38	48.0	18	55/58
NPT 2"	37-44	60.0	18	65
NPT 2-1/2"	42-52	72.6	18	77
NPT 3"	62-70	88.6	18	94

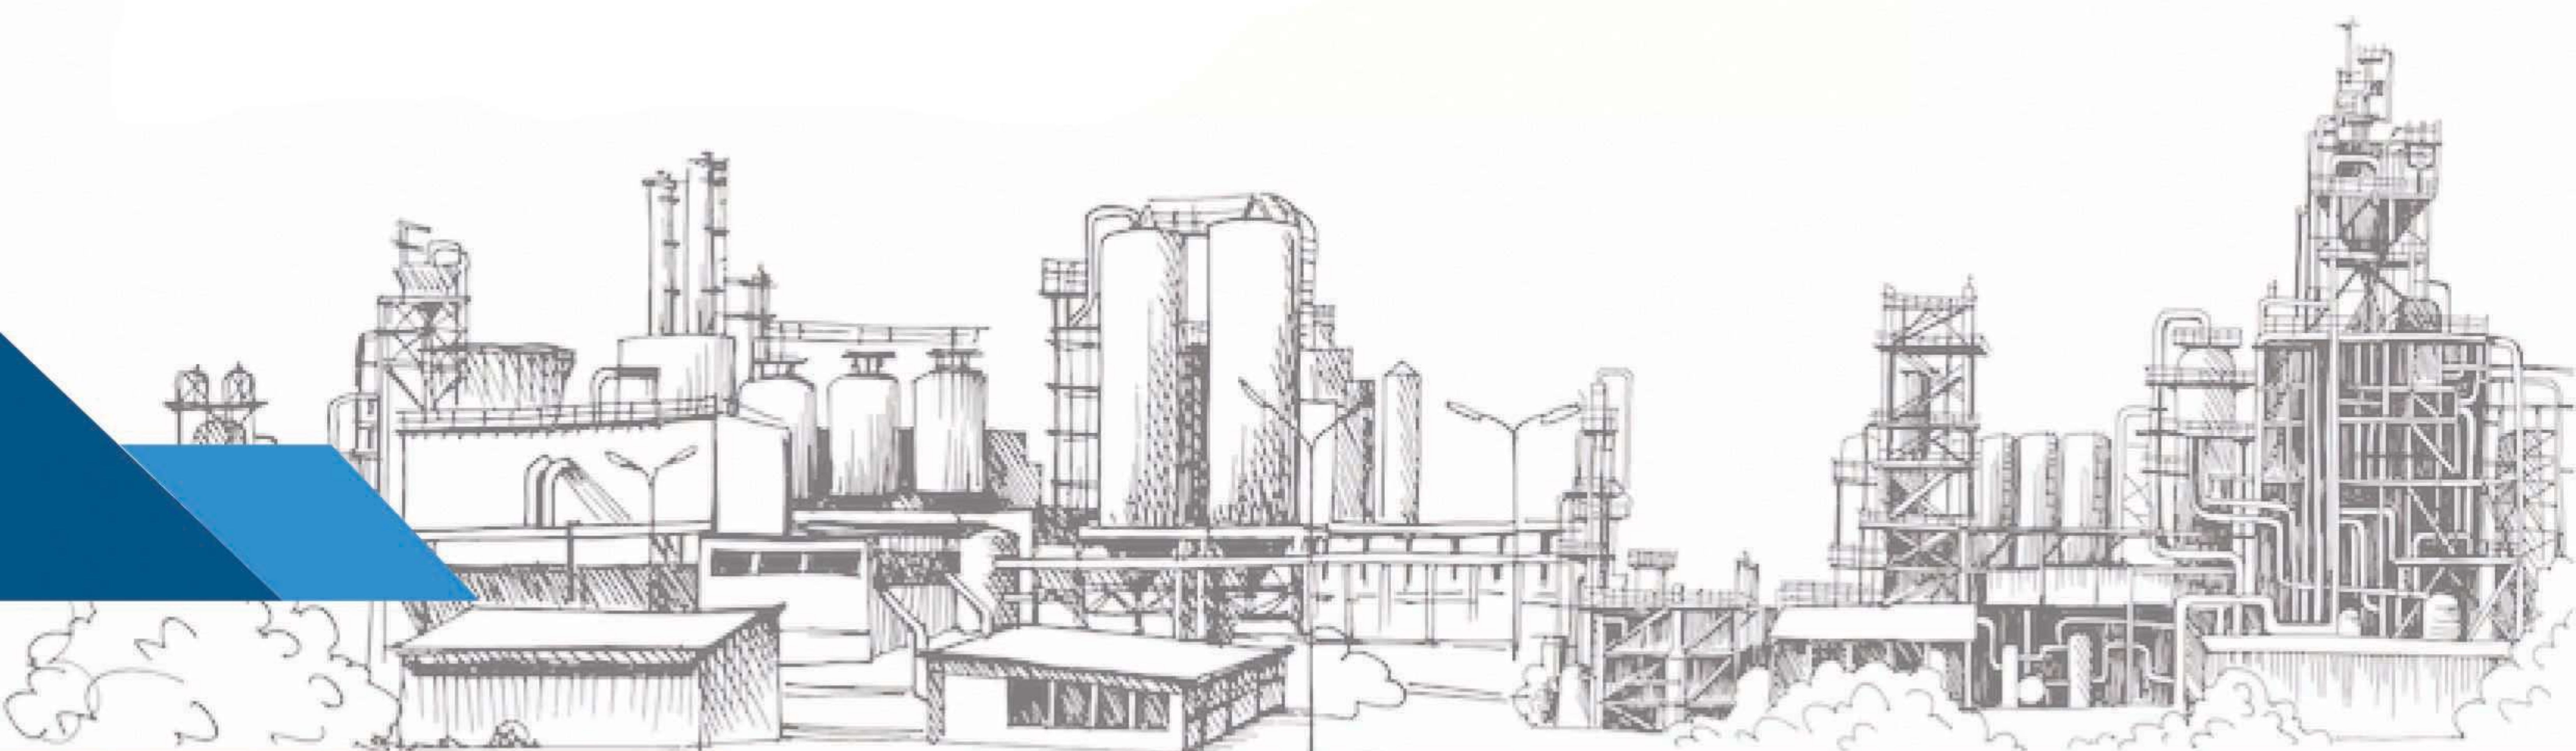

BRASS NICKEL COATED CABLE GLAND G TYPE




Thread Type: G

Material: Brass Nickel Coated

Working temperature: -40°C to 100°C.

IP Protection: IP68

Thread Size	Clamping Size (mm.)	Thread O.D. (mm.)	Thread Length (mm.)	Spanner Size (mm.)
G 1/4	3-6.5	13.6	11	14
G 3/8	4-8	17.0	11	17/20
G 1/2	6-12	21.2	13	22/24
G 3/4	13-18	26.5	13	30
G 1	18-25	33.2	16	40
G 1-1/4	22-33	41.9	16	50
G 1-1/2	32-38	48.0	18	55/58
G 2	37-44	60.0	18	65
G 2-1/2	42-52	72.6	18	77
G 3	62-70	88.6	18	94

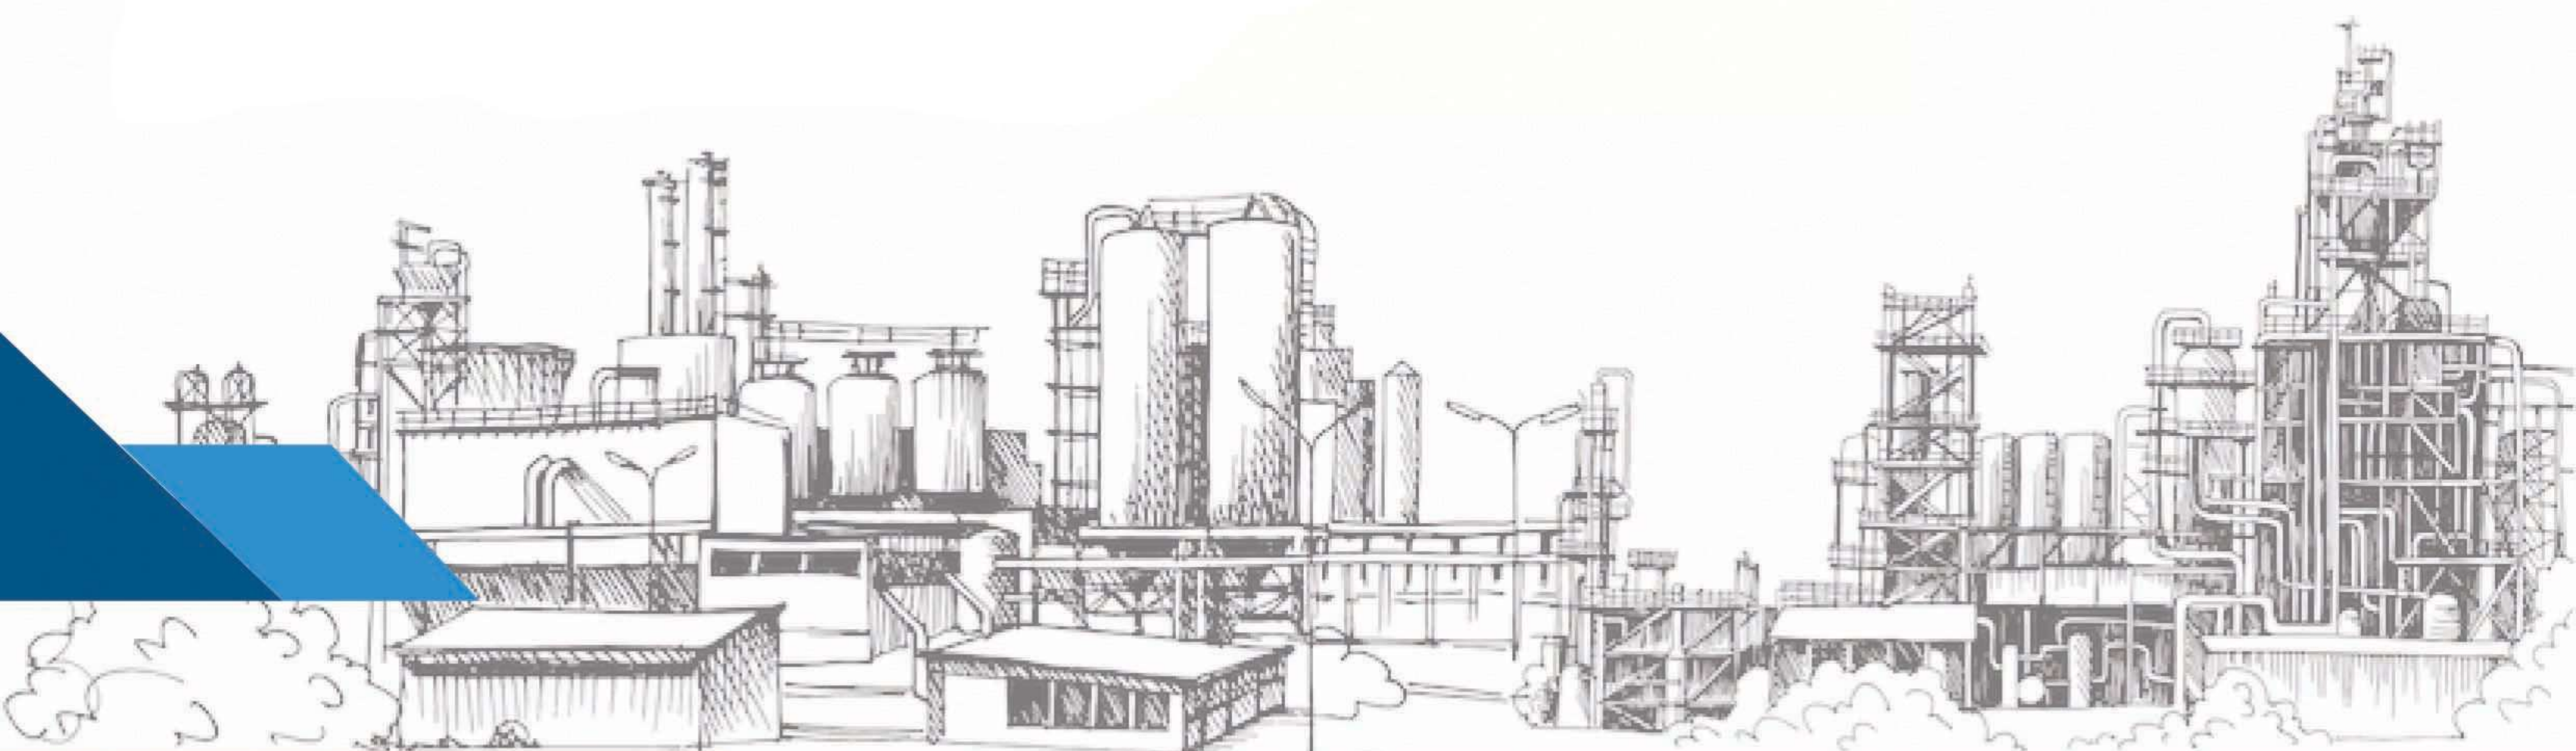

Nylon Cable Gland



Thread Type: Metric and PG

Material: Nylon 66

Working temperature: -40°C to 80°C

Short Period: 120°C

IP Protection: IP68

Color: Black, White, Blue

M Type

Type	Cable range (mm)	Thread O.D.L2 (mm)	Thread length L1 (mm)	Spanner size A&E (mm)
M12 × 1.5	3-6.5	12	9	18/16
M14 × 1.5	4-8	14	9	22/19
M16 × 1.5	4-8	16	9	22/19
M18 × 1.5	5-10	18	9	24/22
M20 × 1.5	6-11	20	10	27/24
M22 × 1.5	10-13	22	10	30/27
M24 × 1.5	12-15	24	10	30/38
M25 × 1.5	12-15	25	11	31/28
M27 × 1.5	13-18	27	12	35/33
M28 × 1.5	13-18	28	12	35/33
M30 × 1.5	16-21	30	12	37/35
M32 × 1.5	16-21	32	12	38/35
M36 × 1.5	18-25	36	12	45/42
M40 × 1.5	22-32	40	15	52/52
M46 × 1.5	22-32	46	15	58/52
M50 × 1.5	32-38	50	18	62/58
M58 × 1.5	37-44	58	18	70/64
M63 × 1.5	37-44	63	18	72/64
M71 × 1.5	42-50	71	30	83/77

PG Type

Type	Cable range (mm)	Thread O.D.L2 (mm)	Thread length L1 (mm)	Spanner size A&E (mm)
PG-07	3-6.5	12.5	9	18/16
PG-09	4-8	15.2	9	22/19
PG-11	5-10	18.6	9	24/22
PG-13.5	6-11	20.4	10	27/24
PG-16	10-13	22.5	10	30/27
PG-19	12-15	24	10	30/28
PG-21	13-18	28.3	12	35/33
PG-25	16-21	30	12	37/35
PG-29	18-25	37	12	45/42
PG-36	22-32	47	15	58/52
PG-42	32-38	54	18	62/58
PG-48	37-44	59.3	18	70/64
PG-63	42-50	71	30	83/77