



40VQJ Series

1-way cassette (Fixed Speed)

13,307 - 40,262 BTUH



World's No.1 Air Conditioning Expert

www.carrier.co.th

40VQJ 1-Way Cassette type Series


Special Feature

- Auto swing mechanism guarantees even distribution of air flow and better balance of room temperature
SWING MODE with vertical supply grille ensures coolness throughout the room. Easily to maintenance.
- Adjustable Fan Speed with AUTO FAN cools down the room quickly. MICROPROCESSOR enables precise temperature control up to 1 degree Celsius.
- TIME DELAY, installed safety protection system, protects and prolongs usage life of compressor by delaying it for 3 minutes before restarting.
- New slim design and new color make 40VQS blended to your decor of any room. Durable anti-rust casing helps the unit last longer.
- Washable filter enhances Indoor Air Quality.

Features ►




Compact design ultra slim body with a minimum of 230 mm. especially suitable for narrow ceiling places.

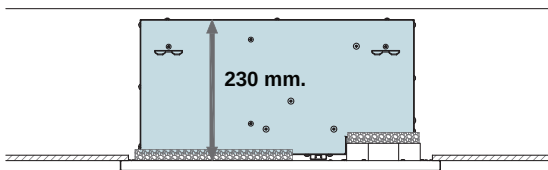

Model 12,000 Btu/Hr.


Standard built-in drain pump with 850mm.

Pump head and slim body makes the installation free from limitation of story height.

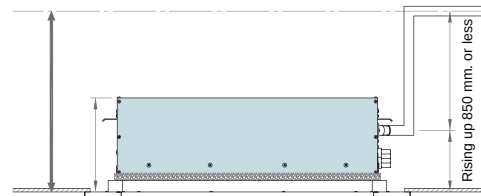

Housing construct made from galvanized steel, with the assembly easily removable from the basic unit.

Fresh air intake port for high quality air supply requirement, creates more comfort and healthy environment.

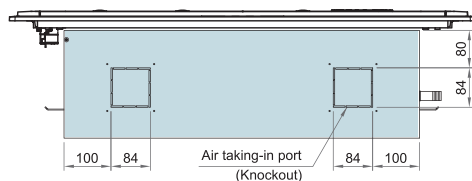


Blue fin with Epoxy and Hydrophilic coating

- Prevents dirt from sticking to the fins
- Condensation water flows and water away dirt
- Anti-corrosion caused by oxidation
- Increases the efficiency of heat exchanger




IAQ Filter Model TCB-ACFC1CPE (Option)



Unit Dimensions

40VQJ012X-040X

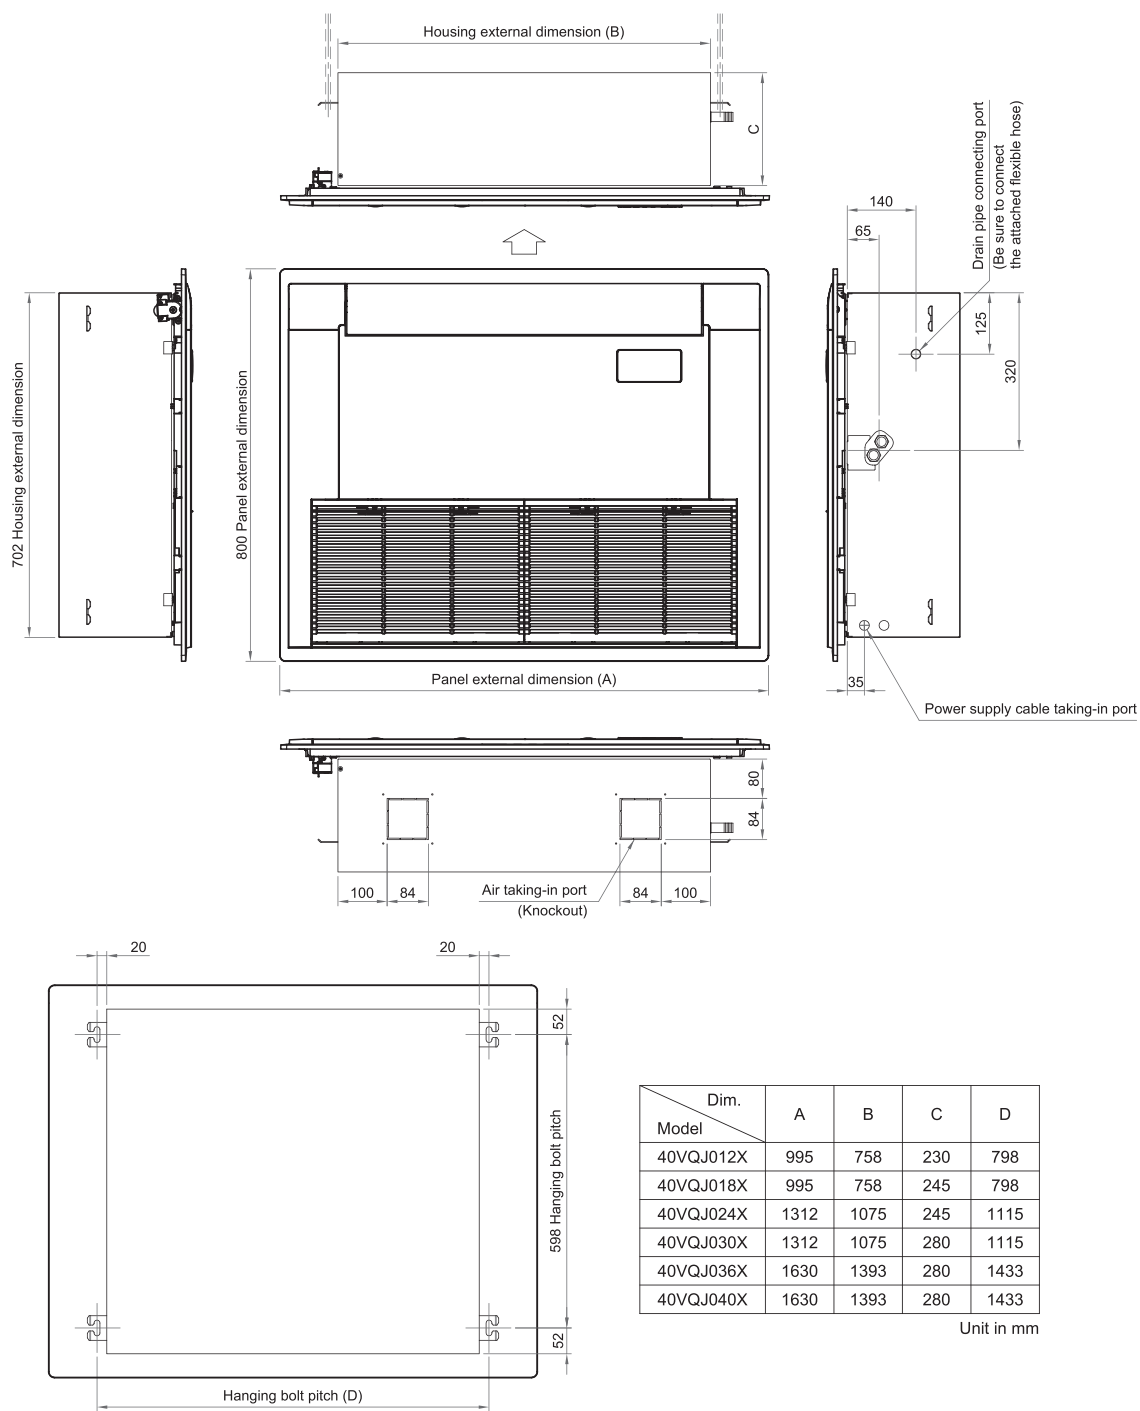



40VQJ Series

The perfect choice for Lobby small size, meeting room, hotels and reception areas.

Specification

Specification (รายละเอียดของเครื่อง)			1 Way Cassette Type							
Model Name(ชื่อรุ่น)	Indoor (เครื่องภายใน)		40VQJ							
			012X	018X	024X	030X	036X	036X	040X	040X
	Outdoor (เครื่องภายนอก)		38RLJ							
Cooling Capacity (ความสามารถในการทำความเย็น)			012R100	018R120	024R120	030R100	036R100	036R300	040R100	040R300
	w.		3,900	5,600	7,400	8,800	10,600	10,600	11,800	11,800
	Btu/hr.		13,307	19,107	25,249	30,026	36,167	36,167	40,262	40,262
Efficiency (ค่าประสิทธิภาพ)	COP.	w/w	3.67	3.67	3.67	3.52	3.52	3.52	3.52	3.52
	EER.	Btu/hr/Watt	12.52	12.52	12.52	12.01	12.01	12.01	12.01	12.01
	SEER.	Btu/hr/Watt	13.29	13.29	13.29	12.75	12.75	12.75	12.75	12.75
Power Consumption (กำลังไฟฟ้า)										
	w.		1,063	1,526	2,016	2,500	3,011	3,011	3,352	3,352
Power Supply (ระบบไฟฟ้า)	Indoor	V/Ph/Hz	220 / 1 / 50	220 / 1 / 50	220 / 1 / 50	220 / 1 / 50	220 / 1 / 50	220 / 1 / 50	220 / 1 / 50	220 / 1 / 50
	Outdoor	V/Ph/Hz	220 / 1 / 50	220 / 1 / 50	220 / 1 / 50	220 / 1 / 50	220 / 1 / 50	380 / 3 / 50	220 / 1 / 50	380 / 3 / 50
Operating Current (กระแสไฟฟ้า)	Outdoor+Indoor	Amp.	5.08	7.3	9.65	11.96	14.41	4.82	16.04	5.36
	Indoor	Amp.	0.34	0.65	0.83	0.91	1.1	1.1	1.1	1.1
Indoor Air Circulation, Max. (ปริมาณลมหมุนเวียน)			cfm	400	600	800	1,000	1,200	1,200	1,400
Dimension - Indoor unit (ขนาดของเครื่อง) (HxWxD)	Front Grill Panel	mm.	18 x 900 x 630	18 x 1104 x 630	18 x 1392 x 630	18 x 1446 x 700	18 x 1554 x 700	18 x 1554 x 700	18 x 1554 x 700	18 x 1554 x 700
	Housing	mm.	250 x 720 x 545	250 x 924 x 545	250 x 1212 x 545	310 x 1266 x 615	310 x 1374 x 615	310 x 1374 x 615	310 x 1374 x 615	310 x 1374 x 615
Dimension - Outdoor unit (ขนาดของเครื่อง)	Height	mm.	625	660	750	750	1,042	1,042	1,210	1,210
	Width	mm.	855	905	905	905	905	905	905	905
	Depth	mm.	285	335	335	335	335	335	335	335
Net Weight (น้ำหนักเครื่อง)	Indoor	kg.	25	30	36	44	50	50	50	50
	Front Grill Panel	kg.	7	9	11	12	14	14	14	14
	Outdoor	kg.	43	50	56	64	74	74	93	93
Expansion Device Type (ชนิดของอุปกรณ์ลดแรงดันสารทำความเย็น)			Capillary Tube (Outdoor unit)				Capillary Tube (Indoor unit)			
Compressor Type (ชนิดคอมเพรสเซอร์)			Rotary	Rotary	Rotary	Rotary	Rotary	Rotary	Rotary	Rotary
Refrigerant Type (ชนิดสารทำความเย็น)			R32							
Connecting Pipe (ขนาดท่อที่ใช้)	Liquid (ท่อส่ง)	inch	1/4	1/4	1/4	3/8	3/8	3/8	3/8	3/8
	Suction (ท่อดูด)	inch	1/2	1/2	1/2	5/8	5/8	5/8	5/8	5/8
	Coupler Style	Type	Flare Connection Type (การเชื่อมต่อแบบบานเฟลอร์)							
	Drain O.D. (ท่อน้ำทิ้ง)	mm.	3/4	3/4	3/4	3/4	3/4	3/4	3/4	3/4
Pipe Length (ความยาวของท่อ)	Standard (มาตรฐานการทดสอบ)	m.	7.5	7.5	7.5	7.5	7.5	7.5	7.5	7.5
	Chargeless Pipe (นํ้ายาที่เติมไว้)	m.	15	15	15	15	15	15	15	15
	Refrigerant charge from factory	kg.	0.96	1.20	1.32	1.72	2.30	2.30	2.50	2.50
	Minimum Pipe Length	m.	4	4	4	4	4	4	4	4
Capacity Test Condition (สภาวะการทดสอบเครื่อง)			Indoor : 27 °C.db 19 °C.wb; Outdoor : 35 °C.db 24 °C.wb							



Wireless Remote Control



CARR-INTD09 (Option)



CARR-INTD09 WiFi (Option)



38RLJ(012-036) Condensing Unit



38RLJ040 Condensing Unit



บริษัท บี.เค.แอร์ซัพพลาย จำกัด

611,613 ถนนพระราม3 แขวงบางโพงพาง เขตยานนาวา กรุงเทพมหานคร 10120
T: 02-284-2826 02-294-5260 02-294-5261 02-294-2972 F: 02-294-2973
email: bkairsupply@hotmail.com LINE ID: bkairsupply.com

บริษัทฯ ขอสงวนสิทธิ์ที่จะเปลี่ยนแปลงรายละเอียดข้างต้น โดยไม่ต้องแจ้งให้ทราบล่วงหน้า
Carrier reserves the right to make changes in specifications without prior notice.