



40VMS Series

Chilled water coil 1-way cassette
12,000-60,000 BTUH




World's No. 1 Air Conditioning Expert

www.bkairsupply.com

40VMS 1-Way Cassette type Series

Special Feature


Compact design ultra slim body with a minimum of 250 mm. especially suitable for narrow ceiling places.

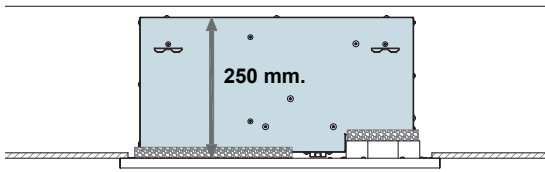

Model 12,000-24,000 Btu/Hr.

Housing construct made from galvanized steel, with the assembly easily removable from the basic unit.

Fresh air intake port for high quality air supply requirement, creates more comfort and healthy environment.

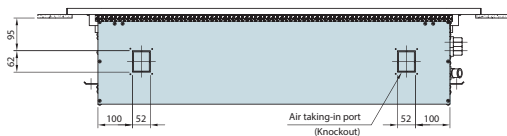


Wireless Remote Control




Wired Remote Control (Option)

- Auto swing mechanism guarantees even distribution of air flow and better balance of room temperature SWING MODE with vertical supply grille ensures coolness throughout the room. Easily to maintenance.
- Adjustable Fan Speed with AUTO FAN cools down the room quickly. MICROPROCESSOR enables precise temperature control up to 1 degree Celsius.
- TIME DELAY, installed safety protection system, protects and prolongs usage life of compressor by delaying it for 3 minutes before restarting.
- New slim design and new color make 40VMS blended to your decor of any room. Durable anti-rust casing helps the unit last longer.
- Washable filter enhances Indoor Air Quality.


Standard built-in drain pump with 850mm. Pump head and slim body makes the installation free from limitation of story height.

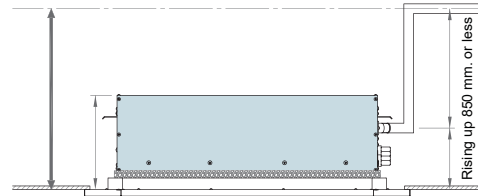

Long air flow distance to reach cool air in wider room Maximum airflow can reach 12 meters

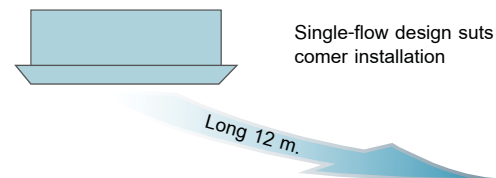


Easily to Service Front grille panel with check port (Option)

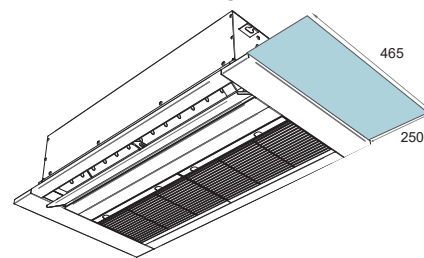

Blue fin with Epoxy and Hydrophilic coating

- Prevents dirt from sticking to the fins
- Condensation water flows and water away dirt
- Anti-corrosion caused by oxidation
- Increases the efficiency of heat exchanger





*The perfect choice for Lobby small size,
meeting room, hotels and reception areas.*

Specification

Specification (รายละเอียดของเครื่อง)			Chilled Water Coil - 1 Way Cassette type							
Model Name (ชื่อรุ่น)	Indoor (เครื่องภายใน)		40VMS							
			012W	018W	024W	030W	036W	040W	048W	060W
Cooling Capacity (ความสามารถในการทำความเย็น)		Btu/hr.	14,400	20,800	26,100	32,720	39,560	45,390	51,830	63,990
Power Consumption (กำลังไฟฟ้า)		W	72	134	148	256	340	620	459	459
Power Supply (ระบบไฟฟ้า)		V / Ph / Hz	220 / 1 / 50							
Operating Current (กระแสไฟฟ้า)		Amp.	0.33	0.62	0.7	1.2	1.6	2.9	3.6	3.6
Motor Power		hp	1/25	1/12	1/10	1/5	1/4	1/2	3/4	3/4
Indoor Air Circulation , Max. (ปริมาณลมหมุนเวียน)		m3/h	680	1,020	1,360	1,700	2,040	2,380	2,720	3,400
		CFM	400	600	800	1,000	1,200	1,400	1,600	2,000
Sound Level (Hi / Med / Low)		db(A)	42/36/27	46/40/32	47/42/34	50/44/36	52/47/39	52/48/39	53/49/41	55/50/41
Net Weight (น้ำหนักเครื่อง)	Front Grill Panel	kg.	6	8	9	10	10	12	14	15
	Housing	kg.	20	24	27	43	44	47	49	51
Connecting Pipe - Indoor (ขนาดท่อที่ใช้)	Water Inlet (FPT)	inch	1/2"	1/2"	1/2"	1/2"	1/2"	1/2"	1/2"	1/2"
	Water Outlet (FPT)	inch	1/2"	1/2"	1/2"	1/2"	1/2"	1/2"	1/2"	1/2"
	Drain O.D. (ท่อน้ำทิ้ง)	mm.	26	26	26	26	26	26	26	26


Remark : Cooling capacity based on Entering Air Temp 80 Fdb / 67 Fwb , Chilled Water Inlet/Outlet 44/54 F , Max air flowrate

Performance data

Model	Entering Chilled Water Temp. F	Entering Air Temp (Fdb / Fwb)															
		76 / 63				78 / 65				80 / 67				82 / 69			
		Total Capacity btu/h	Sensible Capacity btu/h	Chilled Water Flowrate gpm	Water Pressure Drop ft.wg.	Total Capacity btu/h	Sensible Capacity btu/h	Chilled Water Flowrate gpm	Water Pressure Drop ft.wg.	Total Capacity btu/h	Sensible Capacity btu/h	Chilled Water Flowrate gpm	Water Pressure Drop ft.wg.	Total Capacity btu/h	Sensible Capacity btu/h	Chilled Water Flowrate gpm	Water Pressure Drop ft.wg.
40VMS012W	40	13,200	10,200	2.63	10.80	15,300	10,900	3.05	13.70	17,500	11,600	3.49	17.60	19,800	12,300	3.95	21.60
	45	10,100	8,800	2.02	6.60	11,600	9,300	2.32	8.60	13,400	9,900	2.68	11.10	15,800	10,600	3.14	14.50
	50	7,400	7,300	1.47	4.00	8,500	7,900	1.70	5.10	10,000	8,400	2.00	6.50	11,600	9,000	2.32	8.60
40VMS018W	40	19,100	14,900	3.81	11.80	22,100	15,900	4.40	15.20	25,300	16,900	5.04	19.20	28,700	17,900	5.71	24.00
	45	14,600	12,800	2.91	7.30	16,800	13,600	3.34	9.40	19,400	14,400	3.88	12.10	22,700	15,400	4.52	16.00
	50	10,700	10,700	2.13	4.30	12,200	11,400	2.44	5.50	14,400	12,300	2.87	7.20	16,700	13,100	3.34	9.40
40VMS024W	40	24,100	19,100	4.79	10.80	27,800	20,300	5.54	13.90	31,900	21,500	6.35	17.70	36,200	22,800	7.20	22.00
	45	18,400	16,300	3.67	6.80	21,100	17,400	4.20	8.60	24,200	18,400	4.84	10.90	28,500	19,700	5.69	14.60
	50	13,600	13,600	2.72	4.00	15,400	14,600	3.07	4.90	18,100	15,700	3.62	6.60	21,000	16,700	4.19	8.50
40VMS030W	40	30,800	24,400	6.13	6.00	35,200	25,800	7.01	7.60	40,300	27,400	8.03	9.60	45,800	29,100	9.13	12.10
	45	23,100	20,700	4.61	3.70	26,700	22,100	5.34	4.70	31,100	23,500	6.21	6.10	36,000	25,000	7.17	7.90
	50	17,000	17,000	3.40	2.10	19,500	18,500	3.89	2.70	22,800	20,000	4.55	3.60	26,700	21,300	5.32	4.70
40VMS036W	40	37,200	29,400	7.41	7.10	42,800	31,200	8.53	9.10	48,800	33,100	9.72	11.50	55,500	35,100	11.05	14.30
	45	28,000	25,000	5.59	4.40	32,500	26,700	6.48	5.60	37,600	28,400	7.51	7.30	43,700	30,200	8.71	9.50
	50	20,600	20,600	4.12	2.50	23,700	22,400	4.74	3.30	27,600	24,000	5.52	4.30	32,300	25,700	6.46	5.60
40VMS040W	40	42,800	34,000	8.52	6.00	49,100	36,000	9.78	7.70	56,200	38,300	11.19	9.70	63,800	40,500	12.71	12.20
	45	32,100	28,900	6.41	3.70	37,300	30,800	7.45	4.80	43,200	32,800	8.61	6.20	50,200	34,900	10.02	8.00
	50	23,700	23,700	4.74	2.10	27,300	25,900	5.45	2.80	31,600	27,800	6.31	3.60	37,200	29,700	7.43	4.80
40VMS048W	40	48,700	38,600	9.69	8.10	56,000	41,000	11.15	10.40	64,000	43,500	12.74	13.10	72,600	46,100	14.45	16.40
	45	36,700	32,900	7.32	5.00	42,600	35,100	8.50	6.50	49,100	37,200	9.80	8.30	57,200	39,700	11.42	10.80
	50	27,200	27,200	5.44	2.90	31,200	29,500	6.22	3.80	36,100	31,600	7.20	4.90	42,400	33,800	8.47	6.40
40VMS060W	40	60,100	47,700	11.97	10.50	68,800	50,500	13.71	13.40	79,000	53,600	15.73	17.00	89,500	56,800	17.83	21.20
	45	45,200	40,700	9.02	6.40	52,500	43,300	10.48	8.30	60,700	46,100	12.11	10.80	70,400	48,900	14.05	14.00
	50	33,800	33,800	6.74	3.90	38,500	36,500	7.69	4.90	44,500	39,100	8.89	6.30	52,300	41,700	10.45	8.30

Unit Dimensions

40VSM012W-060W

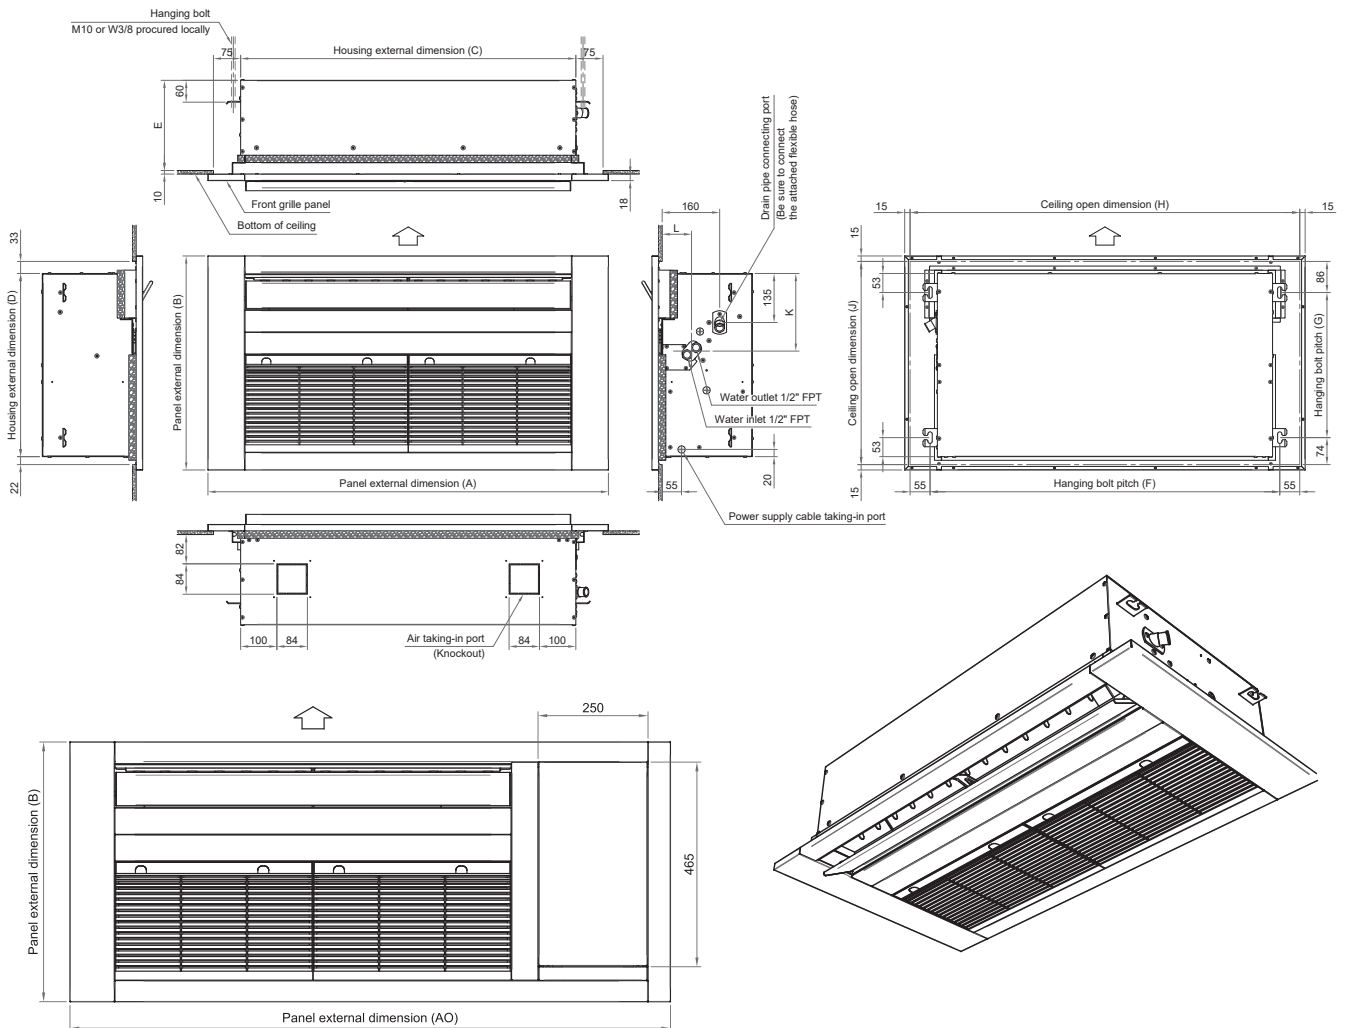

Dim.	A	B	C	D	E	F	G	H	J	K	L	AO
Model												
40VMS012W	900	590	720	505	250	760	400	870	560	215	80	1160
40VMS018W	1104	590	924	505	250	964	400	1074	560	215	80	1364
40VMS024W	1200	590	1020	505	250	1060	400	1170	560	215	80	1460
40VMS030W	1200	680	1020	595	275	1060	445	1170	520	230	85	1460
40VMS036W	1200	680	1020	595	275	1060	445	1170	520	230	85	1460
40VMS040W	1296	725	1116	640	355	1156	535	1266	695	230	85	1556
40VMS048W	1446	725	1266	640	355	1306	535	1416	695	230	85	1706
40VMS060W	1500	725	1320	640	355	1360	535	1470	695	230	85	1760

Unit in mm

บริษัท บี.เค.แอร์สัพพลาย จำกัด
 611,613 ถนนพระราม3 แขวงบางโพงพาง เขตยานนาวา กรุงเทพมหานคร 10120
 โทรศัพท์ 02-294-5260 02-294-5261 02-284-2826 02-294-2972 โทรสาร 02-294-2973
 www.bkairsupply.com email : bkairsupply@hotmail.com LINE ID : Nick_arswin

บริษัทฯ ขอสงวนสิทธิ์ที่จะเปลี่ยนแปลงรายละเอียดข้างต้น โดยไม่ต้องแจ้งให้ทราบล่วงหน้า
 Carrier reserves the right to make changes in specifications without prior notice.



YOUR CARRIER MAN :