

DocuCentre  
S2420  
S2220

**FUJI XEROX** 

# DocuCentre S2420 / S2220

Digital Black & White Multifunction Device



# Feature-rich and super-compact. A truly user-friendly multifunction device.

**DocuCentre S2420/S2220** prints, copies, scans and faxes with ease and power – optimising your business's productivity in one compact solution.

## Features and performance that won't impact your budget

The perfect balance of productivity and ease-of-use. The DocuCentre S2420/S2220 offers convenient features including ID Card Copy, Multiple-Up and colour scanning that can be performed locally or via your office LAN.

### ID Card Copy

For those who need to regularly copy ID cards, the easy-to-use ID card copy feature allows you to copy both sides of the card onto the same side of the paper. Simply place an ID card both face up and face down on the copier surface and press the Quick-Buttons ID Card Copy Service Button. There is no need to change the position of the card when copying the other side, as the feature automatically adjusts this for you.

### Multiple-Up function




This feature enables you to print multiple pages on a single piece of paper. Combine this function with the Duplex mode and dramatically reduce paper usage by printing or copying up to eight pages on one piece of paper.

### Colour scanning

Improve the way you work with a host of scanning features, such as Local Scanning (USB) and Network Scanning (Scan to SMB and E-mail). Convert hard copies into digital files for quick distribution and archiving with just a push of a button.

### Rotate output with collation

The Rotating Collate function can be used to assemble printed output (Portrait and Landscape) by loading the same size paper into any two trays from Tray 1, 2, 3 4, and Bypass Tray.

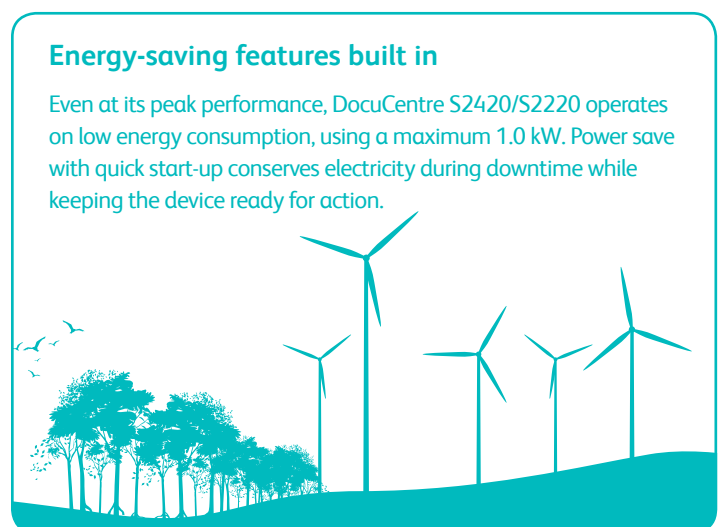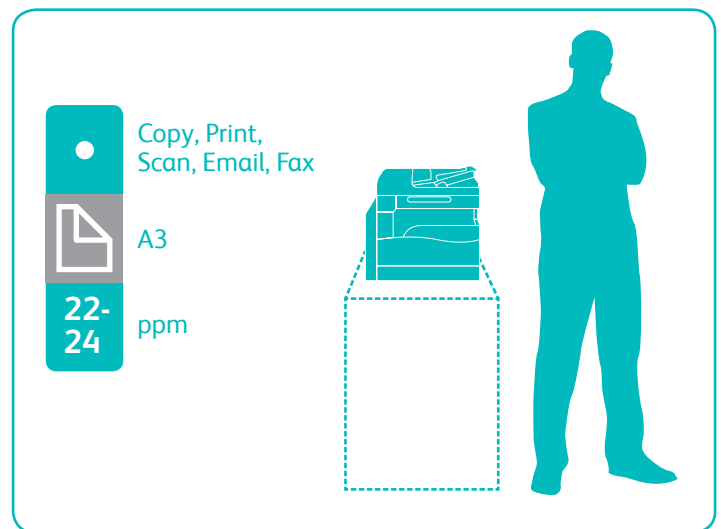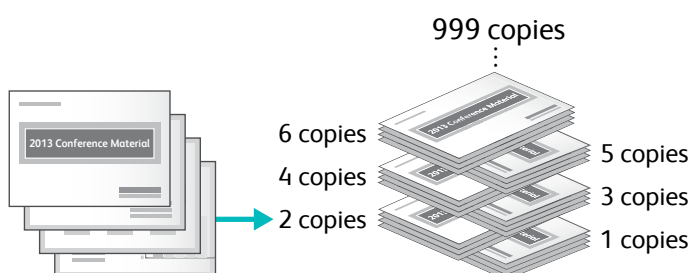

## Quick-Buttons offer easier and simpler operations



- 1

Service Button
- 2

Immediate access to ID Card Copy
- 3

A quick grasp of information on Quick-Buttons
- 4

Allows you to quickly select frequently used copy / scan functions
- 5

A quick monitoring and configuration change
- 6

The indicator light turns on when the machine gets ready to start the operation


## A smart multifunction device that saves space

DocuCentre S2420/S2220 fits a suite of powerful features into a compact package measuring 595mm (width) and 573mm (depth)\*1. Its design incorporates a centre exit to minimise space requirements, even with the optional features.



## Customise with various accessories for your individual office needs

The paper capacity can be increased from the standard capacity of 250 + 100 sheets (One Tray + Bypass Tray) up to 1,850 sheets (4 Trays + Bypass Tray).

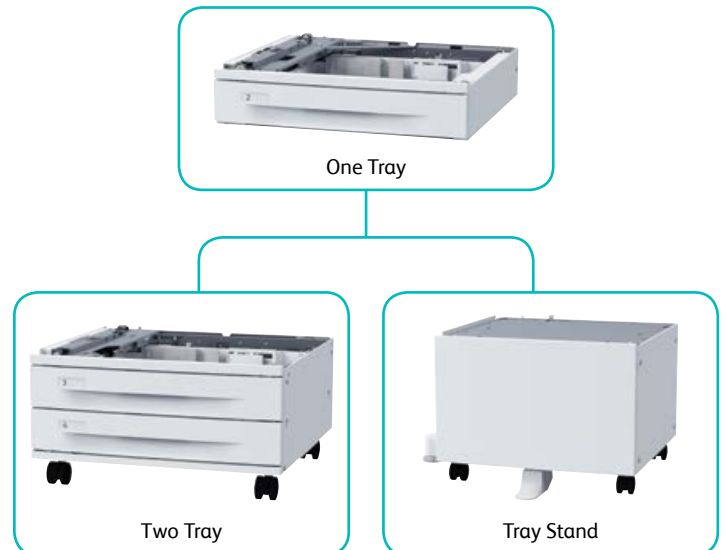

\*1 Main unit and DADF.

# Specifications of DocuCentre S2420 / S2220

## Copy Function

	DocuCentre S2420	DocuCentre S2220
Type	Desktop Type	
System Memory	256MB	
HDD	NA	
Scanning Resolution	600 x 600 dpi	
Printing Resolution	600 x 600 dpi	
Halftone/Printable Colours	256 shades of Gray scales	
Warm-up Time	19 seconds or less (at room temperature 20°C)	
Original Paper Size	297x432mm (A3, 11x17") for both sheet original and book original	
Output Paper Size	Maximum	Tray 1-4: A3, 11x17"; Tray 5 (MSI): 297 x 432 mm
	Minimum	Tray 1-4: A5, Tray 5 (MSI): 88.9 x 98.4 mm
Output Paper Weight <sup>1</sup>	Tray 1-4	Tray 1: 60 to 90gsm, Tray 2-4(Option): 60 to 216gsm
	Tray5(MSI)	60 to 216gsm
First Copy Output Time	7.2 seconds or less	
Reduction/Enlargement	Size-to-Size Preset	1:1±0.8%
		70%, 81%, 86%, 100%, 115%, 122%, 141%
Continuous Copy Speed	A4LEF/B5LEF	Simplex:24ppm, Duplex: 17ppm
	A4	Simplex:15ppm, Duplex: 8.7ppm
	B4/B5	Simplex:12ppm, Duplex: 7.7.2ppm
	A3	Simplex:12ppm, Duplex: 8.6ppm
Paper Tray Capacity	Standard	Tray1: 250 sheets , Tray5 (MSI): 100 sheets
	Optional	One Tray Module (Tray 2): 500 sheets Two Tray Module (Tray 3&4): 500 sheets each
	Maximum	1,850 sheets (Tray1 + Tray2 + Tray3 + Tray4 + MSI)
Output Tray Capacity	250 sheets	
Power Supply	AC220-240V + 10%, 10A for 50/60Hz + 3%	
Power Consumption	Maximum: 1.0 kW, Sleep mode: 2.2 W	
Dimensions	W 595 x D 573 x H 580 mm (with DADF)	
Machine weight	37kg (with DADF)	

<sup>1</sup> Performance may vary for heavyweight, coated and special stocks.

## Print Function

	DocuCentre S2420	DocuCentre S2220
Type	Built-in Type	
Output Paper Size	Same as Copy Function	
Continuous Print Speed	Same as the machine speed	
Print Resolution	Output Resolution	600 x 600 dpi
	Data Process Resolution	600 x 600 dpi
Protocol	TCP/IP v4/v6 (Ipd, Port9100)	
Operating System	Windows® XP, Windows Server® 2003, Windows Vista®, Windows Server® 2008, Windows® 8, Windows® XP x64, Windows Server® 2003 x64, Windows Vista® x64, Windows Server® 2008 x64, Windows® 7 x64, Windows® 8 x64, Windows Server® 2008 R2 x64, Windows Server® 2012 x64	
Connectivity	USB2.0 / Ethernet 100BASE-TX/10BASE-T	

## Scan Function (Local)

Type	Colour Scanner	
Scanning Resolution	Monochrome: 600x600dpi, 400x400dpi, 300x300dpi, 200x200dpi Colour: 300x300dpi, 200x200dpi	
Scanning Speed	BW:18 sheets/min, Colour: 4 sheets/min.*	
Connectivity	USB 2.0	
Scan to PC	Driver	TWAIN / Windows Image Acquisition
	Operating System	Windows® XP, Windows Server® 2003, Windows Vista®, Windows Server® 2008, Windows® 8, Windows® XP x64, Windows Server® 2003 x64, Windows Vista® x64, Windows Server® 2008 x64, Windows® 7 x64, Windows® 8 x64, Windows Server® 2008 R2 x64, Windows Server® 2012 x64

\*Fuji Xerox Standard Document (A4LEF), 200dpi, using TWAIN driver (USB)

## Scan Function (Network)

Type	Colour Scanner	
Scanning Resolution	Monochrome: 600 x 600dpi, 400 x 400dpi, 300 x 300dpi, 200 x 200dpi Colour: 300 x 300dpi, 200 x 200dpi	
Scanning Speed	Mono mode: 22 ipm Colour mode: 13 ipm * Fuji Xerox Standard Document (A4LEF), 200 dpi	
Connectivity	Ethernet 100BASE-TX/10BASE-T	
Scan to SMB	Protocol	TCP/IP (SMB)
	File Format	Monochrome binary: PDF/TIFF (Multi-Page) Colour: PDF (Multi-Page)/JPEG
Scan to e-mail	Operating System	Windows® XP, Windows Server® 2003, Windows Vista®, Windows Server® 2008, Windows® 8, Windows® XP x64, Windows Server® 2003 x64, Windows Vista® x64, Windows Server® 2008 x64, Windows® 7 x64, Windows® 8 x64, Windows Server® 2008 R2 x64, Windows Server® 2012 x64
	Protocol	TCP/IP (SMTP Authentication)
File Format	Monochrome binary: TIFF Colour: JPEG	

## Fax Function (Optional)

Send Document Size	Maximum A3
Recording Paper Size	Maximum A3, Minimum A4
Transmission Time	3 seconds* or less
Transmission Mode	Super G3 / G3 ECM / G3 (ITU-T)
No. of Fax Lines	PSTN / PBX, 1port

\*When A4 size document with approximately 700 characters is transmitted in standard image-quality (8x3.85 lines/mm) and in high-speed mode (28.8kbps or faster, JBIG). Only indicates the time for transmitting the image information and does not include the communication control time. The total communication time will vary depending on the contents of the document, the type of machine receiving the fax, and line condition.

## Duplex Automatic Document Feeder

	DocuCentre S2420	DocuCentre S2220
Type	Duplex Automatic Document Feeder	
Original Paper Size	Maximum: A3, 11 x 17", Minimum: A5	
Capacity	110 sheets	
Feeding Speed (A4LEF)	24 sheets/min (1 sided)	22 sheets/min (1 sided)
	13 sheets/min (2 sided)	13 sheets/min (2 sided)
Dimensions	W540 x D492 x H115mm	
Weight	7 kg	

Tray capacity and speeds calculated at 80gsm.



Whilst the information is correct at the time of printing, Fuji Xerox Australia Pty Ltd reserves the right to change the specifications or withdraw supply of the equipment/software described herein without notice. Quality Endorsed Company ISO 9001:2000, QEC1950/01 SAI Global, Certified Environmental Management ISO 14001:2004, C10094 SAI Global. Other trademarks are the property of their respective owners.

### Customer Expectation Document (CED)

For detailed product specifications, optimum performance parameters and service clearances refer to the Customer Expectation Document.

Protecting the environment is fundamental to our commitment to corporate citizenship. Fuji Xerox Australia provides products that have been designed with both our customers and the environment in mind. We are known for our end-of-life product resource recovery and remanufacturing programs. Our products regularly lead the industry in energy performance and all our sites maintain ISO 14001:2004 Environmental Management System Certification. Fuji Xerox Australia has been recognised for its achievements in environmental sustainability by the United Nations and the Bankia Environmental Foundation in Australia.

For more information or detailed product specifications, please call or visit us at  
**Fuji Xerox Australia Pty Ltd.** ABN 63 000 341 819.  
 101 Waterloo Rd, Macquarie Park NSW 2113.  
 Phone (02) 9856 5000 Fax (02) 9856 5003

**13 14 12**

<http://www.fujixerox.com.au>

