

Powered by Innovation



MINI EXCAVATOR WITH MAXIMUM PERFORMANCE

The new DX55WE hydraulic excavator has all the advantages of the previous model, and now offers additional added value to the operator.

DOOSAN

[[]]

HD

The new DX55WE was developed with the concept of "providing optimum value to the end user." In concrete terms, this translates, into :

Increased production and improved fuel economy is attributed to the electronic optimization of the hydraulic system and the new generation engine.

Improved ergonomics increases comfort and excellent all around visibility ensuring a safe and pleasant working environment.

Improved reliability is achieved through the use of high performance materials combined with new methods of structural stress analysis, which leads to increased component life expectancy, thus reducing operating costs.

COMFORT

One of the most spacious cabs in the market, with low noise & vibration levels and excellent all-round visibility. Extra-large door for easy access.

SAFETY

Your safety is our priority.

MAINTENANCE

Easy access to all compartments.



12 65 23 2

1 1 1 2 2 2

10 00 01

10 mm m

DX55w



Lifting power increased by 10 to 25% by applying Doosan's unique center of gravity design. As the center of gravity is moved to rear part, the oscillation of equipment is prevented. The axle realizes more stable work on rough surface and uneven site thanks to wide angle of upper and lower adjustment



PRODUCTIVITY Superior digging, pulling and traction forces.



UNDERCARRIAGE DESIGN

A rigid, welded frame provides excellent durability. Efficient hydraulic lines routing, transmission protection and heavy duty axles make the undercarriage perfect for wheel excavator applications. Both outriggers and dozer blade are pin type for maximum flexibility. An optional work tool restraint bar is available.







THE IDEAL WORKSPACE–DESIGNED AROUND YOU with one of the most spacious cabs in the market, the DX55WE is designed to provide you with the best possible working conditions. The ergonomic controls and the easy-to-view monitor place the machine firmly in your hands.



MINIMIZED NOISE AND VIBRATION

Industry-leading engine saves on fuel and meets all noise regulations, providing exceptional operator comfort.





1. HIGH-OUTPUT AIR-CONDITIONER AND DEFROSTER

The air-conditioner capacity has been greatly improved and the vents have been installed at both the front and rear of the operator's seat to maximize air-conditioning efficiency. A defroster has been installed to prevent the front windshield from becoming frosted in the cold season resulting in safer operation.

2. SWITCH

The ergonomically placed switches maximizes convenience for the operator.

3. WIDE STORAGE SPACE


Safe storage and convenient use of electric devices and appliances such as mobile phones and razors using a small storage box.

4. FIXED-TYPE INSTRUMENT PANEL

The centralized display panel provides comprehensive information about the status of the machine in an easy to read format. The high quality display panel is waterproof and all information can be seen at a glance.

5. ENLARGED ENTRANCE AND EXIT

As entrance and exit are enlarged, accessibility is improved for getting on and off the vehicle. Since the front workspace is maximized, the inconvenience in operating equipment is minimized.

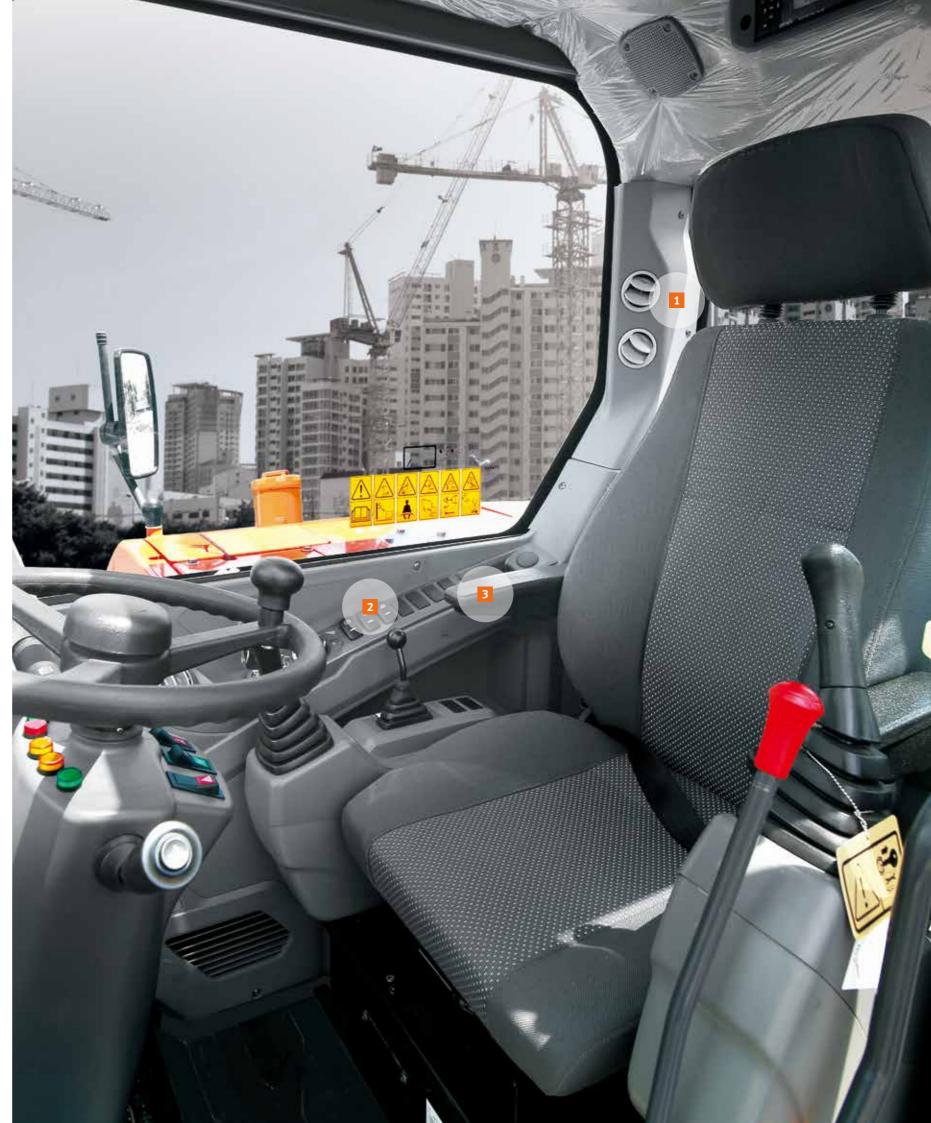







2462363298

1. SPECIALIZED BOOM AND ARM DESIGN

Minimized welding based on the integrated design of the bottom plate. Increased boom and arm durability.

2. LARGE DOZER BLADE


As the ascending and descending speed of dozer blade is increased, work efficiency is maximized. Since the mudguard of blade is extended to both ends, mud does not go behind dozer while working.

3. OPTIMIZED CHASSIE FRAME STRUCTURE

Comfortable work environment with expanded operator's space.

SAFETY COMES IN FIRST WITH ENHANCED SAFETY FEATURES

N Now Man and





4. HIGH-EFFICIENCY, HIGH-STRENGTH ENGINE

Engine produces outstanding power and is known for its durability. This results in excellent operation in high-load operations. In addition, it features a low noise and low emissions suitable for operation in noise sensitive areas and at night.

5. OIL FILTER/FUEL FILTER

The engine oil filter is attached to the engine body and extends out for easy maintenance

6. OUTSTANDING MAIN PUMP

Fuel consumption reduced with easy hydraulic control and pump discharge quantity control.

EASY MAINTENANCE

We Offer Easy, Breezy Maintenance System That Can Also Prevent Downtime Of Your Machine.







BATTERY ON-OFF SWITCH

Electrical devices are protected by turning the battery power off for long-term storage and by periodic inspections of the machine.



OIL FILTER/FUEL FILTER

The engine oil filter is attached to the engine body and extends out for easy maintenance.



COUNTWEIGHT & HOOD

As a cast counterweight is applied, deformation by impact is minimized. Thanks to the bonnet made of metton, the engine is further protected from external obstacle.

DoosanCONNECT® Telemactics Service (OPTIONAL)

TELECOMMUNICATIONS Data flow from machine to web



TELEMATICS SERVICE TERMINAL Telematics Service terminal is installed to machine / connected to EPOS[™]



TELECOMMUNICATION GPS, EPOS[™] data is sent to sedignated server by GSM, Satellite telecommunication



DOOSAN TELEMATICS SERVICE WEB Doosan, Dealer, Customer can easily monitor the GPS, EPOS[™] data from Core Telematics Service web

TELEMATICS SERVICE BENEFITS Doosan and dealer support customers to improve work efficiency with timely and responsive services

CUSTOMER

Improve work efficiency Timely and preventive service Improve operator's skills by comparing work pattern Manage fleet more effectively

DEALER Better service for customers Provide better quality of service Maintain machine value Better understanding of market needs

DOOSAN

Responsive to customer's voice Utilize quality-related field data Apply customer's usage profile to deveping new machine

FUNCTIONS(WEB/APP) Doosan Telematics Service provides various functions to support your great performance



• Fault code/warning

ADT Productivity

Reports

	FUNCTION	EXCAVATOR	WHEEL LOADER	ADT
GPS	Location Geo-fence	All models	All models	All models
Operation hours	Daily, Weekly, Monthly report	All models	All models	All models
Operation hours	Total operation hours Operation hours by mode	All models Tier 4 only	All models	All models
Maintenance parts	Preventive maintenance by item replacement cycle	All models	Tier 4 only	All models
Fault code/ Warning	Fault code Machine Warnings on Gauge Panel	All models	Tier 4 only	All models
Fuel information	Fuel level Fuel consumption	All models Tier 4 only	Tier 4 only	All models
Dump capacity	Dump tonnage Count of Work Cycle	N/A	N/A	All models

GLOBAL PARTS NETWORK

QUALITY-PROVEN MAIN COMPONENTS

Doosan provides fast and precise worldwide delivery of genuine Doosan parts through its global PDC (parts distribution center) network.



GLOBAL NETWORK

The global network of the GPDC (Global Parts Distribution Center) maximizes its supply rate by making sure that each center is stockpiled with all the critical parts required for businesses in its area. The network also minimizes the time and costs required for parts delivery by positioning PDCs close to major markets around the world. Doosan PDCs communicate with customers in their time zone, informing them that they are open for operation, and deliver parts to them as early as possible.

THE GLOBAL PARTS DISTRIBUTION CENTER NETWORK

PDCs had been set up as shown below, including Mother PDC in Ansan, Korea. The eight other PDCs include one in China (Yantai), three in USA (Seattle, Atlanta and Miami), two in Europe (Germany and the UK), one in the Middle East (UAE), and one in Asia (Singapore).





TECHNICAL SPECIFICATIONS

HYDRAULIC SYSTEM

Maximum digging force (ISO)

Main pump

Maximum flow

Туре

Bucket

Arm

MEMO

MAIN SPECIFICATIONS


Engine	
Model	Yanmar 4TNV98
Number of cylinders	4
Bore	Ø98 mm
Stroke	110 mm
Rated power	52 HP @ 2,200 rpm


OPERATING WEIGHT

Operator, lubricant, cooling liquid, fuel tank (full), and standard installation

Boom	3,000 mm
Arm	1,600 mm
Bucket	0.19 m ³
Operational weight	5.9 ton
Ground pressure	-

DIMENSIONS & WORKING RANGE

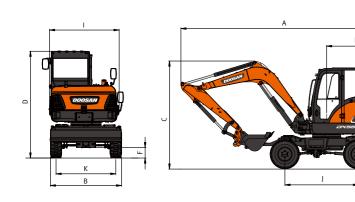

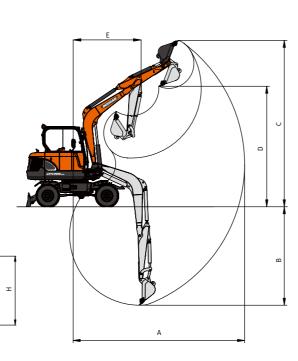

Axial piston pump

4.5 ton

2.8 ton

138.6 l/min (2200rpm)

		DX55WE
Overall length	(mm) A	6,120
Transportation width	(mm) B	1,905/2,080
Transportation height	(mm) C	2,868
Overall height (to top of cab)	(mm) D	2,950
Rear swing radius	(mm) E	1,650
Ground clearance	(mm) F	280
Counterweight Clearance	(mm) G	980
Engine cover height (over shipping width)	(mm) H	1,990
Overall Width	(mm) I	1,850
Tumbler distance	(mm) J	2,100
Track gauge	(mm) K	1,600

		DX55WE
Max. digging reach	(mm) A	6,120
Max. digging depth	(mm) B	3,451
Max. digging height	(mm) C	6,051
Max. loading height	(mm) D	4,314
Min. swing radius	(mm) E	2,412
Rear dozer		500mm
	1920mm	
229	90mm (Optional)	1

