


Datasheet - RC 35

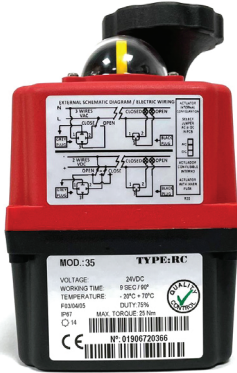

GENERAL CHARACTERISTICS

Housing: Anticorrosive polyamide (lid & body)

Main external shaft: stainless steel

External screws: stainless steel

Gears: Steel and polyamide

Visual position indicator: Polyamide

Dome: Polycarbonate

Adjustable internal cams: Polyamide

Electric motor: 24VDC motor

Insulation: Class B

(IEC 60034) Service: S4

MODEL

RC35

MODEL	RC35									
Voltage VDC or VAC 50/60Hz -0/+5%	VAC	VAC	VDC	VAC	VDC	VAC	VDC	VAC	VDC	VDC
	240	110	110	48	48	24	24	12	12	12
Operation time unload (Sec. / 90o)	9	8	6	9	8	9	9	11	11	11
Maximum torque break	38 Nm / 359,3 lb/in									
Maximum operational torque	35 Nm / 309 lb/in									
Duty rating	75 %									
Max. Working angle	0° to 270°									
Limit switch	4 SPST NO micro (2 motor stop and 2 confirmations)									
Big Plug	EN175301-803 FORM A									
Small Plug	DIN43650/C									
Protection IEC 60529 rating	IP67									
Temperature	-20°C +70°C / -4°F +158°F									
Weight	1,9 Kg									



VALVE CONNECTION

ISO 5211 Plate : F03/F04/F05

DIN 3337 Female output drive : *14 mm

Option :

DIN 3337 Female output drive: *9 or *11 mm

F05 to F07 Conversion Kit with *17mm output



OPTIONS

· Heater



RC 35 SIZES

