

UPVC、CPVC、PPH 支架一体式三通由令球阀 Bracket integrated three-way ball valve

SIZE: 1/2" ~ 2"


JOINT END: SOCKET (ANSI /DIN/JIS/ CNS)

THREADED (PT/NPT/BSPF)

WORKING PRESSURE: 150PSI



序号/NO.	名称/Item	材质/Material	数量/Qty	单位/Unit
8/9/10/11	O-Ring	EPDM/VITON	12	PCS
01	平承口/Socket	UPVC/CPVC/PPH	3	PCS
02	螺帽/Thread cap	UPVC/CPVC/PPH	3	PCS
03	球杆/Metal Stems	UPVC/CPVC/PPH/PVDF+SUS304	1	PCS
04	内衬/liner	UPVC/CPVC/PPH	3	PCS
05	止泻环/Antidiarrheal ring	PTFE	4	PCS
06	球芯/Ball for valve	UPVC/CPVC/PPH	1	PCS
07	本体/Body for valve	UPVC/CPVC/PPH	1	PCS

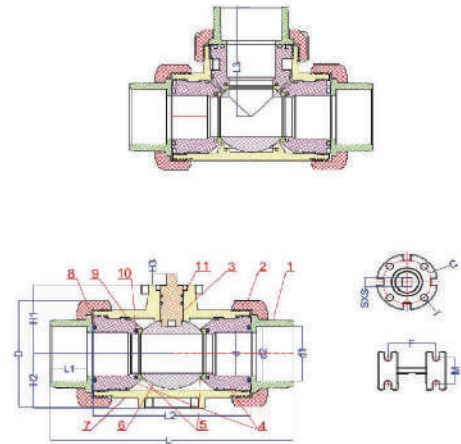

UNIT: MM

SIZE	d	d1					d2				
		UPVC/CPVC				PPH	UPVC/CPVC				PPH
		ANSI	DIN	JIS	CNS	DIN	ANSI	DIN	JIS	CNS	DIN
1/2" (15)	15	21.40	20.30	22.30	22.30	19.30	21.25	20.05	21.85	21.85	19.00
3/4" (20)	20	26.75	25.30	26.30	26.30	24.10	26.58	25.05	25.85	25.85	23.80
1" (25)	25	33.52	32.30	32.33	34.50	31.00	33.28	32.05	31.85	33.90	30.70
1-1/4" (32)	32	42.28	40.35	38.43	42.50	39.00	42.05	40.05	37.85	41.90	38.60
1-1/2" (40)	40	48.40	50.35	48.46	48.46	49.00	48.12	50.05	47.75	47.75	48.60
2" (50)	50	60.45	63.40	60.56	60.56	61.90	60.18	63.05	59.75	59.75	61.40

UNIT: MM

SIZE	D	L	L1	L2	L3	H1	H2	H3	SXS	F	M	C	I	Operating torque (N.M)
1/2" (15)	56.0	141.0	23.0	86.0	43.0	38.0	28.0	8.0	9*9	/	20.0	36	M5	3.0
3/4" (20)	65.0	155.4	26.0	93.0	46.5	45.5	32.0	8.0	9*9	20.0	/	36	M5	3.0
1" (25)	75.5	175.0	29.0	106.0	53.0	52.0	37.5	8.0	9*9	26.0	22.0	36	M5	4.0
1-1/4" (32)	86.5	197.5	32.5	122.0	61.0	60.0	43.0	12.0	11*11	28.0	22.0	50	M6	5.0
1-1/2" (40)	101.0	217.5	35.5	136.0	68.0	66.0	50.0	12.0	11*11	50.0	30.0	50	M6	6.0
2" (50)	121.5	251.5	38.5	162.0	81.0	78.5	60.0	12.0	11*11	50.0	30.0	50	M6	7.0