


2、UPVC /CPVC 美标管件 (ANSI)



UPVC /CPVC FITTINGS

执行标准: ASTM D2467 (SCH80) ASTM F439 (SCH80)
Conform to: ASTM D2467 (SCH80) ASTM F439 (SCH80)



90° 弯头 90° ELBOW (S×S) ANSI

Nominal	Socket Type			Structural Diameter		
SIZE	d1	d2	I	D	d	H
1/2"	21.54	21.23	23.0	29.2	16.0	34.8
3/4"	26.87	26.57	26.0	34.9	22.0	40.9
1"	33.65	33.27	29.0	43.0	30.0	47.0
1-1/4"	42.42	42.04	32.0	52.3	38.0	54.3
1-1/2"	48.56	48.11	35.0	58.9	43.0	60.9
2"	60.63	60.17	38.0	71.9	54.0	70.1
2-1/2"	73.38	72.85	46.0	88.0	67.0	83.0
3"	89.31	88.70	48.0	104.8	82.0	93.6
4"	114.76	114.10	57.0	132.0	106.0	115.7
5"	141.81	141.00	76.0	167.0	133.0	148.5
6"	168.83	168.00	76.0	190.8	158.0	166.5
8"	219.84	218.70	101.0	245.3	200.0	215.7
10"	273.81	272.67	129.0	305.8	262.5	278.0
12"	324.61	323.47	172.0	364.0	300.0	327.0

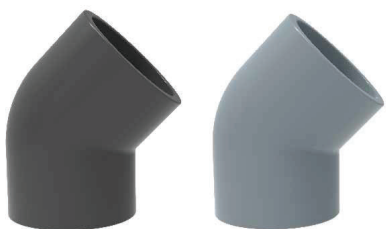

45° 弯头 45° ELBOW (S×S) ANSI

Nominal	Socket Type			Structural Diameter		
SIZE	d1	d2	I	D	d	H
1/2"	21.54	21.23	23.0	29.2	16.0	30.2
3/4"	26.87	26.57	26.0	34.9	22.0	36.2
1"	33.65	33.27	29.0	43.0	30.0	41.0
1-1/4"	42.42	42.04	33.0	52.3	38.0	46.4
1-1/2"	48.56	48.11	36.0	61.0	43.0	52.3
2"	60.63	60.17	39.0	75.0	54.0	59.8
2-1/2"	73.38	72.85	45.0	89.5	67.0	70.0
3"	89.31	88.70	48.0	107.5	82.0	78.3
4"	114.76	114.10	58.0	132.0	106.0	96.3
5"	141.81	141.00	76.0	167.0	133.0	108.0
6"	168.83	168.00	76.0	190.8	163.0	117.8
8"	219.84	218.70	102.0	245.3	212.0	153.8
10"	273.81	272.67	129.0	305.8	262.5	188.0
12"	324.61	323.47	172.0	364.0	300.0	242.8