






N.P.V.EQUIPMENT LTD.,PART.



直接 COUPLING (S×S) DIN

Nominal SIZE	Socket Type			Structural Diameter		
	d1	d2	I	D	d	L
20	20.3	20.1	16.0	27.0	17.0	37.30
25	25.3	25.1	19.0	33.0	23.0	42.00
32	32.3	32.1	22.0	40.5	29.0	49.40
40	40.3	40.1	26.0	49.1	37.0	57.00
50	50.3	50.1	32.0	61.0	47.0	68.00
63	63.3	63.1	38.0	75.0	60.0	82.00
75	75.3	75.1	44.0	89.4	72.0	95.50
90	90.3	90.1	51.0	107.3	87.1	111.20
110	110.4	110.1	61.0	131.0	106.1	133.00
140	140.5	140.2	77.0	166.7	133.0	158.00
160	160.5	160.2	86.0	186.0	154.0	179.50
200	200.8	199.9	106.5	230.6	194.0	218.0
225	225.8	225.0	118.0	261.0	218.0	252.00
250	251.0	249.9	131.6	288.0	242.0	271.2
280	281.0	280.0	145.0	323.0	271.0	300.00
315	316.0	315.0	162.5	363.0	306.0	335.00
355	356.8	355.0	184.3	391.0	326.0	373.5
400	402.0	400.0	204.2	442.0	369.8	423.0

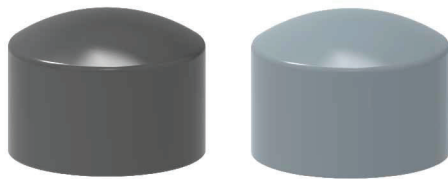

管堵 CAP DIN

Nominal SIZE	Socket Type			Structural Diameter	
	di	d2	I	D	L
20	20.3	20.0	16.0	27.0	25.5
25	25.3	25.0	20.0	33.0	29.5
32	32.3	32.0	24.0	40.5	35.5
40	40.3	40.0	28.0	49.1	40.0
50	50.3	50.0	32.0	61.0	46.5
63	63.3	63.0	38.0	75.0	54.5
75	75.4	75.0	44.0	89.4	66.5
90	90.4	90.0	52.5	107.3	74.5
110	110.4	110.1	63.0	131.0	85.5
140	140.6	140.0	77.0	166.7	117.0
160	160.6	160.0	86.0	186.0	117.0
200	201.0	299.9	106.5	230.6	141.6
225	225.8	225.0	119.0	256.7	162.0
250	251.0	250.0	131.6	288.0	170.6
280	281.5	279.9	147.0	314.8	212.5
315	316.6	314.9	164.3	358.2	234.5
355	356.8	355.0	184.3	391.0	265.0
400	402.0	400.0	204.2	442.0	294.0