



N.P.V. EQUIPMENT LTD., PART.

/ 科恒新材料


产品符合: DIN ANSI JIS CNS 标准

3、UPVC / CPVC日标工业管道

UPVC / CPVC PIPE (JIS)

Nominal SIZE	D(mm)	Tolerance on Average	T (mm)	Tolerance	公称压力 (MPa)
16A	22	±0.2	2.7	+0.6	1.0
20A	26	±0.2	2.7	+0.6	1.0
25A	32	±0.2	3.1	+0.8	1.0
30A	38	±0.2	3.1	+0.8	1.0
40A	48	±0.2	3.6	+0.8	1.0
50A	60	±0.2	4.1	+0.8	1.0
65A	76	±0.3	4.1	+0.8	1.0
75A	89	±0.3	5.5	+0.8	1.0
100A	114	±0.4	6.6	+1.0	1.0
150A	165	±0.5	8.9	+1.4	1.0
200A	216	±0.7	10.3	+1.4	1.0
250A	267	±0.9	12.7	+1.8	1.0
300A	318	±1.0	15.1	+2.2	1.0


执行标准: JIS K6742 JIS K6776
Conform to: JIS K6742 JIS K6776

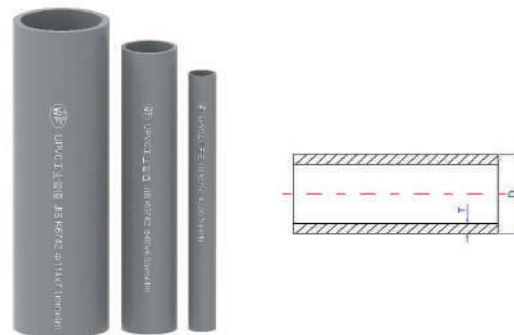

4、PPH / PPR管道

PPH/PPR PIPE

执行标准: GB/T 18742.2-2017 DIN 8077:2007-05
Conform to: GB/T 18742.2-2017 DIN 8077:2007-05

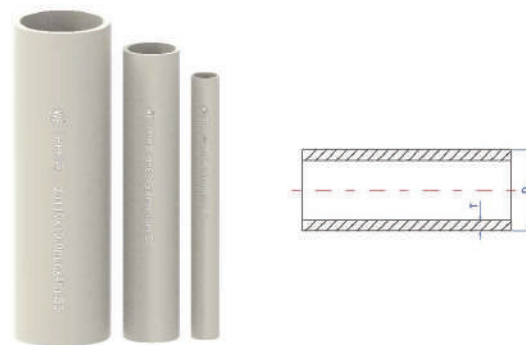

Nominal SIZE	D(mm)	Tolerance on Average	S12.5 (0.6Mpa)		S8.3 (0.8Mpa)		S5 (1.0Mpa)		S4 (1.25Mpa)		S3.2 (1.6Mpa)		S2.5 (2.0Mpa)	
			T (mm)	Tolerance	T (mm)	Tolerance	T (mm)	Tolerance	T (mm)	Tolerance	T (mm)	Tolerance	T (mm)	Tolerance
20	20	+0.3	-	-	-	-	2.0	+0.3	2.3	+0.4	2.8	+0.4	3.4	+0.5
25	25	+0.3	-	-	-	-	2.3	+0.4	2.8	+0.4	3.5	+0.5	4.2	+0.6
32	32	+0.3	-	-	2.0	+0.3	2.9	+0.4	3.6	+0.5	4.4	+0.6	5.4	+0.7
40	40	+0.4	2.0	+0.3	2.3	+0.4	3.7	+0.5	4.5	+0.6	5.5	+0.7	6.7	+0.8
50	50	+0.5	2.0	+0.3	2.9	+0.4	4.6	+0.6	5.6	+0.7	6.9	+0.8	8.3	+1.0
63	63	+0.6	2.5	+0.4	3.6	+0.5	5.8	+0.7	7.1	+0.9	8.6	+1.0	10.5	+1.2
75	75	+0.7	2.9	+0.4	4.3	+0.6	6.8	+0.8	8.4	+1.0	10.3	+1.2	12.5	+1.4
90	90	+0.9	3.5	+0.5	5.1	+0.7	8.2	+1.0	10.1	+1.2	12.3	+1.4	15.0	+1.6
110	110	+1.0	4.2	+0.6	6.3	+0.8	10.0	+1.1	12.3	+1.4	15.1	+1.7	18.3	+2.0
125	125	+1.2	4.8	+0.6	7.1	+0.9	11.4	+1.3	14.0	+1.5	17.1	+1.9	20.8	+2.2
140	140	+1.3	5.4	+0.7	8.0	+0.9	12.7	+1.4	15.7	+1.7	19.2	+2.1	23.3	+2.5
160	160	+1.5	6.2	+0.8	9.1	+1.1	14.6	+1.6	17.9	+1.9	21.9	+2.3	26.6	+2.8
200	200	+1.8	7.7	+0.9	11.4	+1.3	18.2	+2.0	22.4	+2.4	27.4	+2.9	33.2	+3.6
225	225	+2.1	8.6	+1.0	12.8	+1.4	20.5	+2.2	25.2	+2.7	30.8	+3.2	37.4	+4.0
250	250	+2.3	9.6	+1.1	14.2	+1.6	22.7	+3.4	27.9	+2.9	34.2	+3.7	-	-
280	280	+2.5	10.7	+1.2	15.9	+1.7	25.4	+2.7	31.3	+3.3	38.3	+4.1	-	-
315	315	+2.5	12.1	+1.4	17.9	+1.9	28.6	+3.0	35.2	+3.8	-	-	-	-
355	355	+3.2	13.6	+1.5	20.1	+2.2	32.2	+3.4	39.7	+4.2	-	-	-	-
400	400	+3.6	15.3	+1.7	22.7	+2.4	36.3	+3.9	-	-	-	-	-	-
450	450	+3.8	17.2	+1.9	25.5	+2.7	-	-	-	-	-	-	-	-
500	500	+4.0	19.1	+2.1	28.4	+3.0	-	-	-	-	-	-	-	-
560	560	+4.3	21.4	+2.2	31.7	+3.3	-	-	-	-	-	-	-	-
630	630	+4.6	24.1	+2.6	35.7	+3.8	-	-	-	-	-	-	-	-