




HIGHBAY LINEAR 100W

APPLICATION/DESCRIPTION

- * NEW DESIGN OR REPLACE OLD LAMP TO SAVING ENERGY AND LONG DURATION TIMES
- * WITH MANY COLOR TO MAKE GOOD ATMOSPHERE
- * HAVE WHITE OR MULTI-LIGHT THAT APPROPRIATE FOR SHOWCASES, DISPLAY WINDOWS, MODERN SHOP, ETC

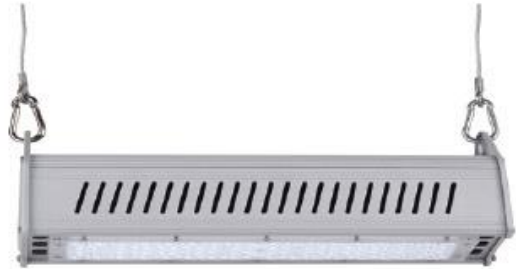

SPECIFICATION

- MATERIAL : Aluminum + acrylic lens
- INPUT VOLTAGE : 85-305 VAC
- LED CHIP : SMD Lumileds
- POWER : 100W
- LUMINOUS FLUX : >11000 lm
- EFFICACY : >110 lm/W
- COLOR RENDERING INDEX : >70
- LED COLOR TEMPERATURE : 2700-6500K
- THDi : <15%
- BEAM ANGLE : 30°/60°/90°/30*70°/60*90°/60*120°/70*140°
- POWER FACTOR : >0.95
- WORKING TEMPERATURE : -10°C-50°C
- LIGHTING SOURCE LIFE : >50,000Hrs

STANDARD

TIS. 1955-2551 LIGHTING AND SIMILAR EQUIPMENT:
 RADIO DISTURBANCE LIMITS
 ISO 9001 CERTIFIED FOR QUALITY CONTROL GUARANTEE
 RoHS

MODEL	LAMP		HOLE CUT(mm)			WEIGH	REMARK
	WATT	TYPE	W	L	H	Kg	
XZ-HBL-019S2	100	SMD	115	620	13.5		



HIGHBAY LINEAR 200W

APPLICATION/DESCRIPTION

- * NEW DESIGN OR REPLACE OLD LAMP TO SAVING ENERGY AND LONG DURATION TIMES
- * WITH MANY COLOR TO MAKE GOOD ATMOSPHERE
- * HAVE WHITE OR MULTI-LIGHT THAT APPROPRIATE FOR SHOWCASES, DISPLAY WINDOWS, MODERN SHOP, ETC



SPECIFICATION

MATERIAL	: Aluminum + acrylic lens
INPUT VOLTAGE	: 85-305 VAC
LED CHIP	: SMD Lumileds
POWER	: 200W
LUMINOUS FLUX	: >22000 lm
EFFICACY	: >110 lm/W
COLOR RENDERING INDEX	: >70
LED COLOR TEMPERATURE	: 2700-6500K
THDi	: <15%
POWER FACTOR	: >0.95
WORKING TEMPERATURE	: -10°C-50°C
LIGHTING SOURCE LIFE	: >50,000Hrs

STANDARD

TIS. 1955-2551 LIGHTING AND SIMILAR EQUIPMENT:
 RADIO DISTURBANCE LIMITS
 ISO 9001 CERTIFIED FOR QUALITY CONTROL GUARANTEE
 RoHS

MODEL	LAMP		HOLE CUT(mm)			WEIGH	REMARK
	WATT	TYPE	W	L	H	Kg	
XZ-HBL-019S2	200	SMD	115	1154	13.5		




HIGHBAY LINEAR 300W

APPLICATION/DESCRIPTION

- * NEW DESIGN OR REPLACE OLD LAMP TO SAVING ENERGY AND LONG DURATION TIMES
- * WITH MANY COLOR TO MAKE GOOD ATMOSPHERE
- * HAVE WHITE OR MULTI-LIGHT THAT APPROPRIATE FOR SHOWCASES, DISPLAY WINDOWS, MODERN SHOP, ETC

SPECIFICATION

MATERIAL	: Aluminum + acrylic lens
INPUT VOLTAGE	: 85-305 VAC
LED CHIP	: SMD Lumileds
POWER	: 300W
LUMINOUS FLUX	: >33000 lm
EFFICACY	: >110 lm/W
COLOR RENDERING INDEX	: >70
LED COLOR TEMPERATURE	: 2700-6500K
THDi	: <15%
POWER FACTOR	: >0.95
WORKING TEMPERATURE	: -10°C-50°C
LIGHTING SOURCE LIFE	: >50,000Hrs

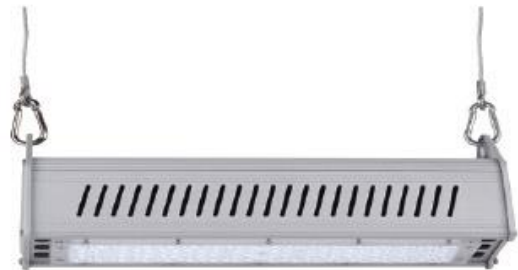

ภาพสินค้าตัวอย่าง

STANDARD

TIS. 1955-2551 LIGHTING AND SIMILAR EQUIPMENT:

RADIO DISTURBANCE LIMITS

ISO 9001 CERTIFIED FOR QUALITY CONTROL GUARANTEE

RoHS

MODEL	LAMP		HOLE CUT(mm)			WEIGH	REMARK
	WATT	TYPE	W	L	H	Kg	
XZ-HBL-019S2	300	SMD	230	947	27.5		