





## LED FLOOD LIGHT 1020W SD33S20M

### APPLICATION/DESCRIPTION

- \* NEW DESIGN OR REPLACE OLD LAMP TO SAVING ENERGY AND LONG DURATION TIMES

### SPECIFICATION

BODY MATERIAL	: ALUMINUM
INPUT VOLTAGE	: 85-305 VAC ,50 Hz.
LED CHIP	: SMD LUMILEDS
POWER	: 1020 W $\pm$ 10%
LUMINOUS FLUX	: 150,000 lm
EFFICACY	: >145lm/W
COLOR RENDERING INDEX	: >70
LED COLOR TEMPERATURE	: 5700K $\pm$ 500K
THDi	: <15%
POWER FACTOR	: >0.9
WORKING TEMPERATURE	: -10~45 $^{\circ}$ C
LIGHTING SOURCE LIFE	: >50,000Hr
SURGE PROTECTION	: 10kV.
IP PROTECTION RATING	: IP65
Driver	: MEANWELL ELG / INVENTONIC
Beam angle has	30/60/90 $^{\circ}$

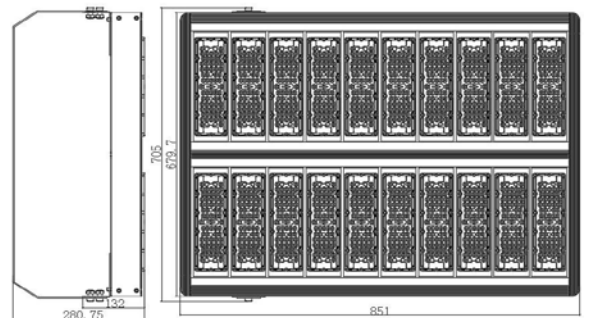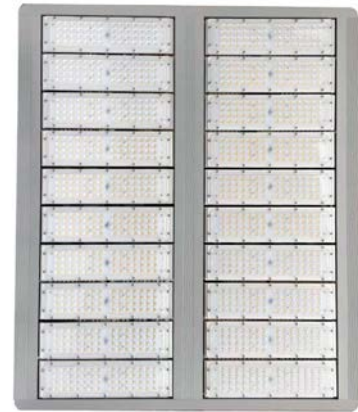

### STANDARD

TIS. 1955-2551 LIGHTING AND SIMILAR EQUIPMENT:  
RADIO DISTURBANCE LIMITS

MODEL	LAMP		DIMENSION (mm.)			WEIGH	REMARK
	WATT	TYPE	L	W	H	Kg.	
XZ-FL-SD33S20M	1020	SMD	960	680	280	26.5	20 MODULE