




## LED LINEAR LIGHT 30W

### APPLICATION/DESCRIPTION

- \* NEW DESIGN OR REPLACE OLD LAMP TO SAVING ENERGY AND LONG DURATION TIMES

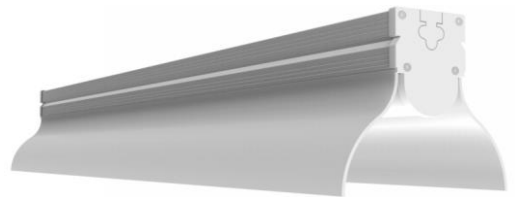

### SPECIFICATION

BODY MATERIAL	: ALUMINUM
INPUT VOLTAGE	: 180-260 VAC
LED CHIP	: EPISTAR
POWER	: 30W
LUMINOUS FLUX	: 2900-3000lm
EFFICACY	: 100lm/W
COLOR RENDERING INDEX	: >80
LED COLOR TEMPERATURE	: 2700K / 4000k / 6000k
VIEW ANGLE	: 80°
THDi	: 15%
POWER FACTOR	: >0.95
WORKING TEMPERATURE	: -10° - 50°C
LIGHTING SOURCE LIFE	: 30,000 hrs.
COVER	: MILKY WHITE , FROSTED , TRANSPARENT
FINISH COLOR	: WHITE , Alu. SILIVER

### STANDARD

TIS. 1955-2551 LIGHTING AND SIMILAR EQUIPMENT:

RADIO DISTURBANCE LIMITS

ISO 9001 CERTIFIED FOR QUALITY CONTROL GUARANTEE

RoHS


MODEL	LAMP		DIMENSION (mm.)			REMARK
	WATT	TYPE	W	L	H	
XZ-TEC001LIN02-30W	30	SMD	104	890	95	



## LED LINEAR LIGHT 40W

### APPLICATION/DESCRIPTION

- \* NEW DESIGN OR REPLACE OLD LAMP TO SAVING ENERGY AND LONG DURATION TIMES

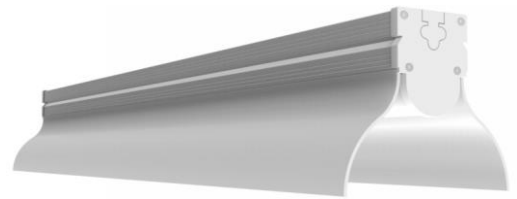

### SPECIFICATION

BODY MATERIAL	: ALUMINUM
INPUT VOLTAGE	: 180-260 VAC
LED CHIP	: EPISTAR
POWER	: 40W
LUMINOUS FLUX	: 4300-4500lm
EFFICACY	: 100lm/W
COLOR RENDERING INDEX	: >80
LED COLOR TEMPERATURE	: 2700K / 4000k / 6000k
VIEW ANGLE	: 80°
THDi	: 15%
POWER FACTOR	: >0.95
WORKING TEMPERATURE	: -10° - 50°C
LIGHTING SOURCE LIFE	: 30,000 hrs.
COVER	: MILKY WHITE , FROSTED , TRANSPARENT
FINISH COLOR	: WHITE , Alu. SILIVER

### STANDARD

TIS. 1955-2551 LIGHTING AND SIMILAR EQUIPMENT:  
RADIO DISTURBANCE LIMITS  
ISO 9001 CERTIFIED FOR QUALITY CONTROL GUARANTEE  
RoHS


MODEL	LAMP		DIMENSION (mm.)			REMARK
	WATT	TYPE	W	L	H	
XZ-TEC001LIN02-40W	40	SMD	104	1196	95	



## LED LINEAR LIGHT 50W

### APPLICATION/DESCRIPTION

- \* NEW DESIGN OR REPLACE OLD LAMP TO SAVING ENERGY AND LONG DURATION TIMES

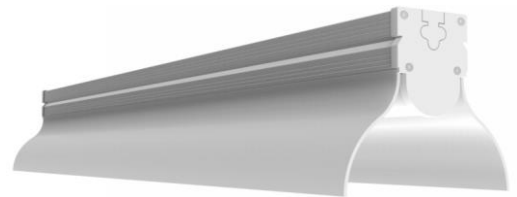

### SPECIFICATION

BODY MATERIAL	: ALUMINUM
INPUT VOLTAGE	: 180-260 VAC
LED CHIP	: EPISTAR
POWER	: 50W
LUMINOUS FLUX	: 5300-5500lm
EFFICACY	: 100lm/W
COLOR RENDERING INDEX	: >80
LED COLOR TEMPERATURE	: 2700K / 4000k / 6000k
VIEW ANGLE	: 80°
THDi	: 15%
POWER FACTOR	: >0.95
WORKING TEMPERATURE	: -10° - 50°C
LIGHTING SOURCE LIFE	: 30,000 hrs.
COVER	: MILKY WHITE , FROSTED , TRANSPARENT
FINISH COLOR	: WHITE , Alu. SILIVER

### STANDARD

TIS. 1955-2551 LIGHTING AND SIMILAR EQUIPMENT:

RADIO DISTURBANCE LIMITS

ISO 9001 CERTIFIED FOR QUALITY CONTROL GUARANTEE

RoHS


MODEL	LAMP		DIMENSION (mm.)			REMARK
	WATT	TYPE	W	L	H	
XZ-TEC001LIN02-50W	50	SMD	104	1195	95	



## LED LINEAR LIGHT 60W

### APPLICATION/DESCRIPTION

- \* NEW DESIGN OR REPLACE OLD LAMP TO SAVING ENERGY AND LONG DURATION TIMES

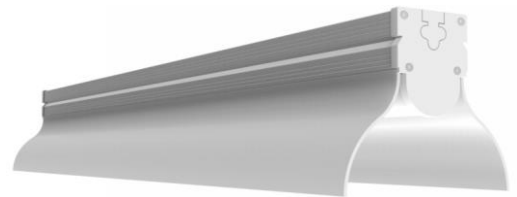

### SPECIFICATION

BODY MATERIAL	: ALUMINUM
INPUT VOLTAGE	: 180-260 VAC
LED CHIP	: EPISTAR
POWER	: 60W
LUMINOUS FLUX	: 6500-6600lm
EFFICACY	: 100lm/W
COLOR RENDERING INDEX	: >80
LED COLOR TEMPERATURE	: 2700K / 4000k / 6000k
VIEW ANGLE	: 80°
THDi	: 15%
POWER FACTOR	: >0.95
WORKING TEMPERATURE	: -10° - 50°C
LIGHTING SOURCE LIFE	: 30,000 hrs.
COVER	: MILKY WHITE , FROSTED , TRANSPARENT
FINISH COLOR	: WHITE , Alu. SILVER

### STANDARD

TIS. 1955-2551 LIGHTING AND SIMILAR EQUIPMENT:

RADIO DISTURBANCE LIMITS

ISO 9001 CERTIFIED FOR QUALITY CONTROL GUARANTEE

RoHS

MODEL	LAMP		DIMENSION (mm.)			REMARK
	WATT	TYPE	W	L	H	
XZ-TEC001LIN02-60W	60	SMD	104	1490	95	