




LED Hoisting line lights 50W

APPLICATION/DESCRIPTION

* NEW DESIGN OR REPLACE OLD LAMP TO SAVING ENERGY AND LONG DURATION TIMES

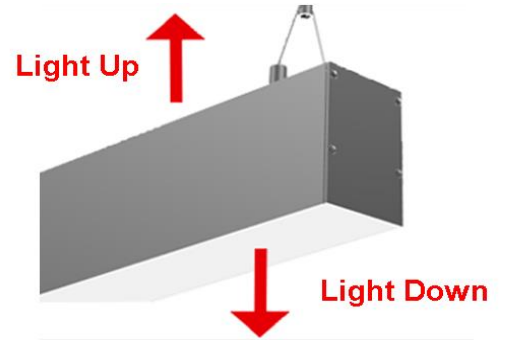

Lift line lights on both sides of the light

SPECIFICATION

- BODY MATERIAL : ALUMINUM
- INPUT VOLTAGE : 180-260 VAC
- LED CHIP : SMD
- POWER : 50W
- LUMINOUS FLUX : 5000lm
- EFFICACY : 100lm/W
- COLOR RENDERING INDEX : >80
- LED COLOR TEMPERATURE : 2700K / 4000k / 6000k
- VIEW ANGLE : 120°
- THDi : 15%
- POWER FACTOR : >0.95
- WORKING TEMPERATURE : -10° - 50°C
- LIGHTING SOURCE LIFE : 30,000 hrs.
- COVER : MILKY
- FINISH COLOR : WHITE , BLACK , Alu. SILIVER

STANDARD

TIS. 1955-2551 LIGHTING AND SIMILAR EQUIPMENT:
 RADIO DISTURBANCE LIMITS
 ISO 9001 CERTIFIED FOR QUALITY CONTROL GUARANTEE
 RoHS


MODEL	LAMP		DIMENSION (mm.)			REMARK
	WATT	TYPE	W	L	H	
XZ-TEC001LSD02-120 50W	50	SMD	1190	75	54	



LED Hoisting line lights 50W Dimmable

APPLICATION/DESCRIPTION

* NEW DESIGN OR REPLACE OLD LAMP TO SAVING ENERGY AND LONG DURATION TIMES

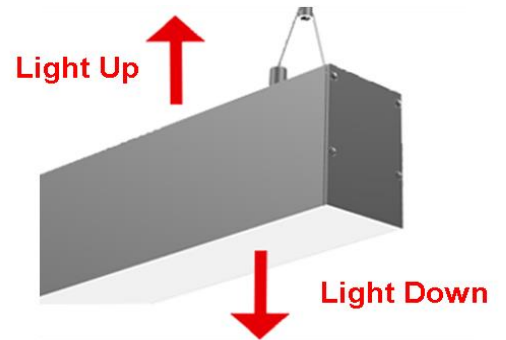

Lift line lights on both sides of the light

SPECIFICATION

- BODY MATERIAL : ALUMINUM
- INPUT VOLTAGE : 180-260 VAC
- LED CHIP : SMD
- POWER : 50W
- LUMINOUS FLUX : DIMMABLE
- EFFICACY : 100lm/W
- COLOR RENDERING INDEX : >80
- LED COLOR TEMPERATURE : 2700K / 4000k / 6000k
- VIEW ANGLE : 120°
- THDi : 15%
- POWER FACTOR : >0.95
- WORKING TEMPERATURE : -10° - 50°C
- LIGHTING SOURCE LIFE : 30,000 hrs.
- COVER : MILKY
- FINISH COLOR : WHITE , BLACK , Alu. SILIVER

STANDARD

TIS. 1955-2551 LIGHTING AND SIMILAR EQUIPMENT:
 RADIO DISTURBANCE LIMITS
 ISO 9001 CERTIFIED FOR QUALITY CONTROL GUARANTEE
 RoHS


MODEL	LAMP		DIMENSION (mm.)			REMARK
	WATT	TYPE	W	L	H	
XZ-TEC001LSD02-120 50W	50	SMD	1190	75	54	



LED Hoisting line lights 50W

APPLICATION/DESCRIPTION

* NEW DESIGN OR REPLACE OLD LAMP TO SAVING ENERGY AND LONG DURATION TIMES

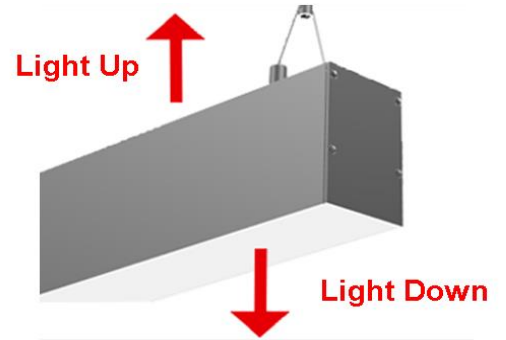

Lift line lights on both sides of the light

SPECIFICATION

- BODY MATERIAL : ALUMINUM
- INPUT VOLTAGE : 180-260 VAC
- LED CHIP : SMD
- POWER : 50W
- LUMINOUS FLUX : 5000lm
- EFFICACY : 100lm/W
- COLOR RENDERING INDEX : >80
- LED COLOR TEMPERATURE : 2700K / 4000k / 6000k
- VIEW ANGLE : 120°
- THDi : 15%
- POWER FACTOR : >0.95
- WORKING TEMPERATURE : -10° - 50°C
- LIGHTING SOURCE LIFE : 30,000 hrs.
- COVER : MILKY
- FINISH COLOR : WHITE , BLACK , Alu. SILIVER

STANDARD

TIS. 1955-2551 LIGHTING AND SIMILAR EQUIPMENT:
 RADIO DISTURBANCE LIMITS
 ISO 9001 CERTIFIED FOR QUALITY CONTROL GUARANTEE
 RoHS


MODEL	LAMP		DIMENSION (mm.)			REMARK
	WATT	TYPE	W	L	H	
XZ-TEC001LSD02-150 50W	50	SMD	1490	75	54	



LED Hoisting line lights 50W Dimmable

APPLICATION/DESCRIPTION

* NEW DESIGN OR REPLACE OLD LAMP TO SAVING ENERGY AND LONG DURATION TIMES

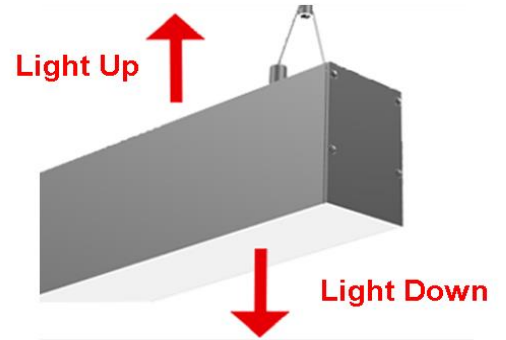

Lift line lights on both sides of the light

SPECIFICATION

- BODY MATERIAL : ALUMINUM
- INPUT VOLTAGE : 180-260 VAC
- LED CHIP : SMD
- POWER : 50W
- LUMINOUS FLUX : DIMMABLE
- EFFICACY : 100lm/W
- COLOR RENDERING INDEX : >80
- LED COLOR TEMPERATURE : 2700K / 4000k / 6000k
- VIEW ANGLE : 120°
- THDi : 15%
- POWER FACTOR : >0.95
- WORKING TEMPERATURE : -10° - 50°C
- LIGHTING SOURCE LIFE : 30,000 hrs.
- COVER : MILKY
- FINISH COLOR : WHITE , BLACK , Alu. SILIVER

STANDARD

TIS. 1955-2551 LIGHTING AND SIMILAR EQUIPMENT:
 RADIO DISTURBANCE LIMITS
 ISO 9001 CERTIFIED FOR QUALITY CONTROL GUARANTEE
 RoHS

MODEL	LAMP		DIMENSION (mm.)			REMARK
	WATT	TYPE	W	L	H	
XZ-TEC001LSD02-150 50W	50	SMD	1490	75	54	