



**CANOPY 60W**

**APPLICATION/DESCRIPTION**

- \* NEW DESIGN OR REPLACE OLD LAMP TO SAVING ENERGY AND LONG DURATION TIMES
- \* WITH MANY COLOR TO MAKE GOOD ATMOSPHERE
- \* HAVE WHITE OR MULTI-LIGHT THAT APPROPRIATE FOR SHOWCASES, GAS STATION, HALL MEETING ETC.



**SPECIFICATION**

TUBE MATERIAL	: Aluminum + acrylic lens
INPUT VOLTAGE	: 85-305 VAC
LED CHIP	: SMD Lumileds
POWER	: 60W
LUMINOUS FLUX	: >6600 lm
EFFICACY	: >110 lm/W
COLOR RENDERING INDEX	: 70/80
LED COLOR TEMPERATURE	: 2700-6500K ± 500K
THDi	: <15%
POWER FACTOR	: >0.95
WORKING TEMPERATURE	: -10-50°C
LIGHTING SOURCE LIFE	: >50,000Hrs
HOLE CUT	: 345*215 mm

**STANDARD**

TIS. 1955-2551 LIGHTING AND SIMILAR EQUIPMENT:  
 RADIO DISTURBANCE LIMITS  
 ISO 9001 CERTIFIED FOR QUALITY CONTROL GUARANTEE  
 RoHS

MODEL	LAMP		HOLE CUT(mm)			WEIGH	REMARK
	WATT	TYPE	W	L	H	g	
XZ-GS-A01	60	SMD LED	350	250	120	3.9	



## CANOPY 90W

### APPLICATION/DESCRIPTION

- \* NEW DESIGN OR REPLACE OLD LAMP TO SAVING ENERGY AND LONG DURATION TIMES
- \* WITH MANY COLOR TO MAKE GOOD ATMOSPHERE
- \* HAVE WHITE OR MULTI-LIGHT THAT APPROPRIATE FOR SHOWCASES, GAS STATION, HALL MEETING ETC.



### SPECIFICATION

TUBE MATERIAL	: Aluminum + acrylic lens
INPUT VOLTAGE	: 85-305 VAC
LED CHIP	: SMD Lumileds
POWER	: 90W
LUMINOUS FLUX	: >9900 lm
EFFICACY	: >110 lm/W
COLOR RENDERING INDEX	: 70/80
LED COLOR TEMPERATURE	: 2700-6500K $\pm$ 500K
THDi	: <15%
POWER FACTOR	: >0.95
WORKING TEMPERATURE	: -10-50°C
LIGHTING SOURCE LIFE	: >50,000Hrs
HOLE CUT	: 345*315 mm

### STANDARD

TIS. 1955-2551 LIGHTING AND SIMILAR EQUIPMENT:

RADIO DISTURBANCE LIMITS

ISO 9001 CERTIFIED FOR QUALITY CONTROL GUARANTEE

RoHS


MODEL	LAMP		HOLE CUT(mm)			WEIGH	REMARK
	WATT	TYPE	W	L	H	g	
XZ-GS-A01	90	SMD LED	350	350	120	5.2	



**CANOPY 120W**

**APPLICATION/DESCRIPTION**

- \* NEW DESIGN OR REPLACE OLD LAMP TO SAVING ENERGY AND LONG DURATION TIMES
- \* WITH MANY COLOR TO MAKE GOOD ATMOSPHERE
- \* HAVE WHITE OR MULTI-LIGHT THAT APPROPRIATE FOR SHOWCASES, GAS STATION, HALL MEETING ETC.



**SPECIFICATION**

TUBE MATERIAL	: Aluminum + acrylic lens
INPUT VOLTAGE	: 85-305 VAC
LED CHIP	: SMD Lumileds
POWER	: 120W
LUMINOUS FLUX	: >13200 lm
EFFICACY	: >110 lm/W
COLOR RENDERING INDEX	: 70/80
LED COLOR TEMPERATURE	: 2700-6500K ± 500K
THDi	: <15%
POWER FACTOR	: >0.95
WORKING TEMPERATURE	: -10-50°C
LIGHTING SOURCE LIFE	: >50,000Hrs
HOLE CUT	: 345*385 mm

**STANDARD**

TIS. 1955-2551 LIGHTING AND SIMILAR EQUIPMENT:  
 RADIO DISTURBANCE LIMITS  
 ISO 9001 CERTIFIED FOR QUALITY CONTROL GUARANTEE  
 RoHS


MODEL	LAMP		HOLE CUT(mm)			WEIGH	REMARK
	WATT	TYPE	W	L	H	g	
XZ-GS-A01	120	SMD LED	420	350	120	6.5	



**CANOPY 150W**

**APPLICATION/DESCRIPTION**

- \* NEW DESIGN OR REPLACE OLD LAMP TO SAVING ENERGY AND LONG DURATION TIMES
- \* WITH MANY COLOR TO MAKE GOOD ATMOSPHERE
- \* HAVE WHITE OR MULTI-LIGHT THAT APPROPRIATE FOR SHOWCASES, GAS STATION, HALL MEETING ETC.

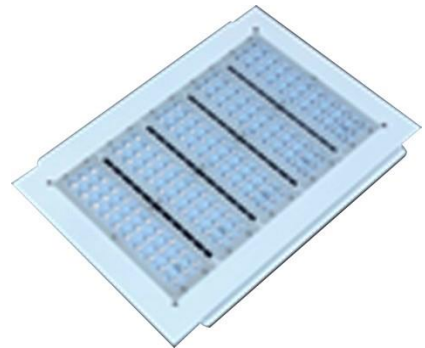

**SPECIFICATION**

TUBE MATERIAL	: Aluminum + acrylic lens
INPUT VOLTAGE	: 85-305 VAC
LED CHIP	: SMD Lumileds
POWER	: 150W
LUMINOUS FLUX	: >16500 lm
EFFICACY	: >110 lm/W
COLOR RENDERING INDEX	: 70/80
LED COLOR TEMPERATURE	: 2700-6500K ± 500K
THDi	: <15%
POWER FACTOR	: >0.95
WORKING TEMPERATURE	: -10-50°C
LIGHTING SOURCE LIFE	: >50,000Hrs
HOLE CUT	: 345*465 mm

**STANDARD**

TIS. 1955-2551 LIGHTING AND SIMILAR EQUIPMENT:  
 RADIO DISTURBANCE LIMITS  
 ISO 9001 CERTIFIED FOR QUALITY CONTROL GUARANTEE  
 RoHS

MODEL	LAMP		HOLE CUT(mm)			WEIGH	REMARK
	WATT	TYPE	W	L	H	g	
XZ-GS-A01	150	SMD LED	500	350	120	8	