

APPLICATION / DESCRIPTION


NEW DESIGN OR REPLACE OLD LAMP TO SAVING ENERGY AND LONG DURATION TIME

Specification

MODEL	XZ-HBUFO
BODY MATERIAL	ALUMINUM
INPUT VOLTAGE	85-305 VAC 50Hz
LED CHIP	SMD PHILIPS LUMILEDS
POWER	100W
LUMINOUS FLUX	15000 LUMEN
EFFICACY	150 Lm/W
COLOR RENDERING INDEX	70 Ra
LED COLOR TEMPERATURE	3000-6500K
THDi	<15%
POWER FACTOR	>0.95
WORKING TEMPERATURE	-20 to 45 °C
LIGHTING SOURCE LIFE	50000 Hrs
SURGE PROTECTION	6kV
IP PROTECTION RATING	IP65
DRIVER	MEANWELL
BEAM	60°/90°



Lighting distribution curve

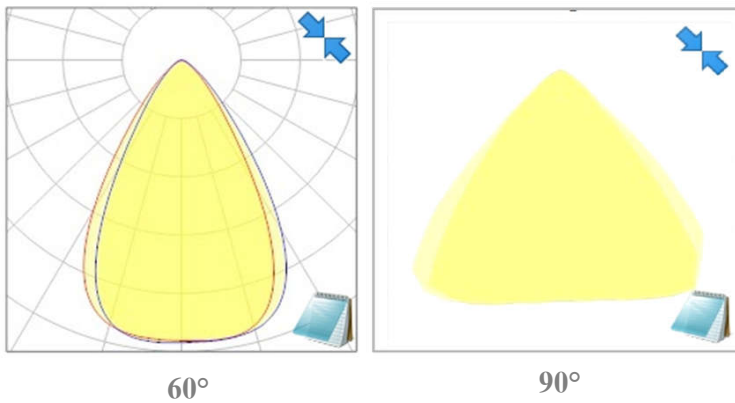

BEAM ANGLE 60°	BEAM ANGLE 90°		
LENS	LED LAMP IP65	SMD	SPD 6KV

LED Light source



Driver



APPLICATION / DESCRIPTION


NEW DESIGN OR REPLACE OLD LAMP TO SAVING ENERGY AND LONG DURATION TIME

Specification

MODEL	XZ-HBUFO
BODY MATERIAL	ALUMINUM
INPUT VOLTAGE	85-305 VAC 50Hz
LED CHIP	SMD PHILIPS LUMILEDS
POWER	150W
LUMINOUS FLUX	22500 LUMEN
EFFICACY	150 Lm/W
COLOR RENDERING INDEX	70 Ra
LED COLOR TEMPERATURE	3000-6500K
THDi	<15%
POWER FACTOR	>0.95
WORKING TEMPERATURE	-20 to 45 °C
LIGHTING SOURCE LIFE	50000 Hrs
SURGE PROTECTION	6kV
IP PROTECTION RATING	IP65
DRIVER	MEANWELL
BEAM	60°/90°



Lighting distribution curve

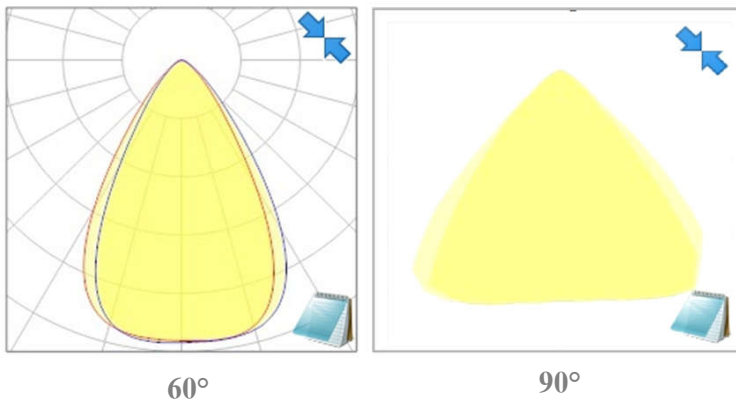

BEAM ANGLE 60°

BEAM ANGLE 90°

LENS LED LAMP IP65 SMD SPD 6KV

LED Light source



Driver



APPLICATION / DESCRIPTION


NEW DESIGN OR REPLACE OLD LAMP TO SAVING ENERGY AND LONG DURATION TIME

Specification

MODEL	XZ-HBUFO
BODY MATERIAL	ALUMINUM
INPUT VOLTAGE	85-305 VAC 50Hz
LED CHIP	SMD PHILIPS LUMILEDS
POWER	200W
LUMINOUS FLUX	30000 LUMEN
EFFICACY	150 Lm/W
COLOR RENDERING INDEX	70 Ra
LED COLOR TEMPERATURE	3000-6500K
THDi	<15%
POWER FACTOR	>0.95
WORKING TEMPERATURE	-20 to 45 °C
LIGHTING SOURCE LIFE	50000 Hrs
SURGE PROTECTION	6kV
IP PROTECTION RATING	IP65
DRIVER	MEANWELL
BEAM	60°/90°



Lighting distribution curve

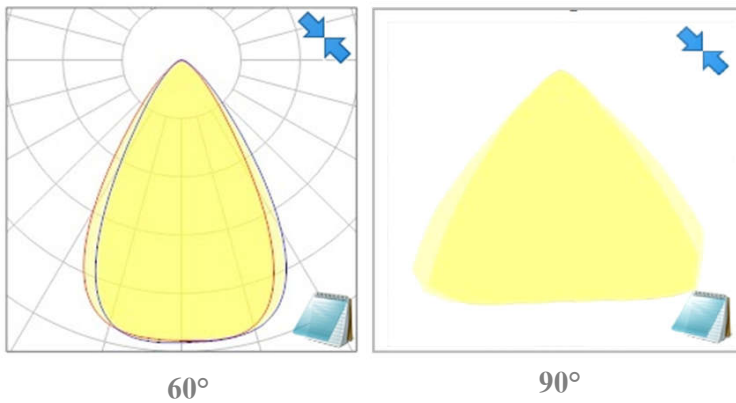

BEAM ANGLE 60°	BEAM ANGLE 90°		
LENS	LED LAMP IP65	SMD	SPD 6KV

LED Light source



Driver

