

LED CANOPY ROYS 100W

APPLICATION / DESCRIPTION


NEW DESIGN OR REPLACE OLD LAMP TO SAVING ENERGY AND LONG DURATION TIME

Specification


MODEL	XZ-CP-STATION
BODY MATERIAL	ALUMINUM
INPUT VOLTAGE	85-305 VAC 50Hz
LED CHIP	SMD LUMILEDS
POWER	100W
LUMINOUS FLUX	>12000-13000 LUMEN
EFFICACY	>120-130Lm/W
COLOR RENDERING INDEX	70 Ra
LED COLOR TEMPERATURE	3000K-6500K
THDi	15%
POWER FACTOR	>0.9
WORKING TEMPERATURE	-20 to 45°C
LIGHTING SOURCE LIFE	50000 Hrs.
SURGE PROTECTION	6KV
BEAM ANGLE	90°
DRIVER	PHILIPS
WEIGHT	6.9 Kg



Lighting distribution curve

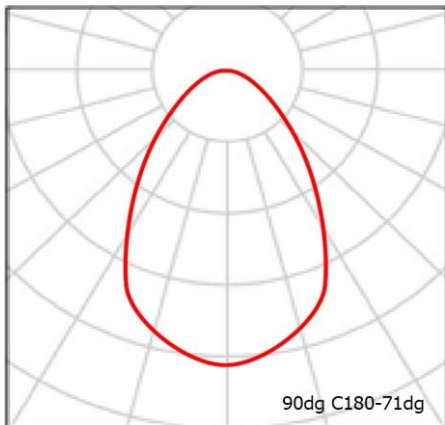

Dimension of Product

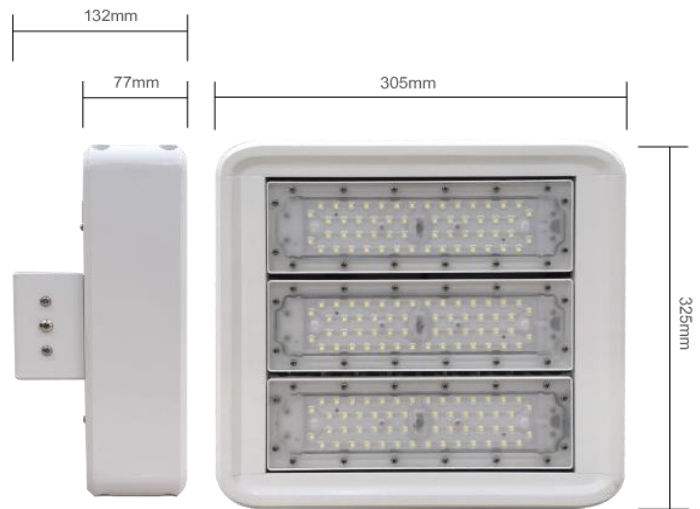

BEAM ANGLE
90°

LED MODULE
IP65

SMD

SPD
6KV

LENS

DOWNLOAD
IES

LED Light source



Driver



LED CANOPY ROYS 130W

APPLICATION / DESCRIPTION


NEW DESIGN OR REPLACE OLD LAMP TO SAVING ENERGY AND LONG DURATION TIME

Specification

MODEL	XZ-CP-STATION
BODY MATERIAL	ALUMINUM
INPUT VOLTAGE	85-305 VAC 50Hz
LED CHIP	SMD LUMILEDS
POWER	130W
LUMINOUS FLUX	>15000-16000 LUMEN
EFFICACY	>120-130Lm/W
COLOR RENDERING INDEX	70 Ra
LED COLOR TEMPERATURE	3000K-6500K
THDi	15%
POWER FACTOR	>0.9
WORKING TEMPERATURE	-20 to 45°C
LIGHTING SOURCE LIFE	50000 Hrs.
SURGE PROTECTION	6KV
BEAM ANGLE	90°
DRIVER	PHILIPS
WEIGHT	6.9 Kg



Lighting distribution curve

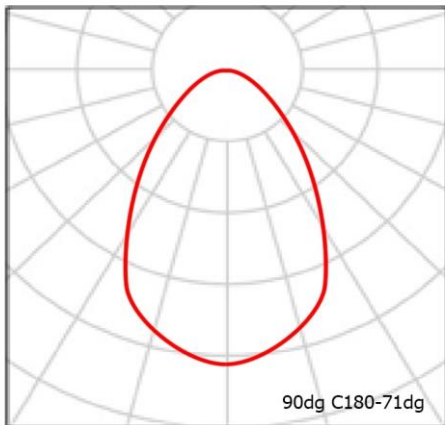

Dimension of Product



BEAM ANGLE
90°

LED MODULE
IP65

SMD

SPD
6KV

LENS

DOWNLOAD
IES

LED Light source



Driver

