

Compact series (rail type)

TW and TTW Series

Compact type

Application		Type name		Number of contents	External dimensions (mm)				General mass per pole (g)
		With button	Without button		A	B	C	D	
Terminal unit									
600V 10A 1.25mm ² (AWG16)	1 to 1	TW 10 B	TW 10 BN	50P	40.3	25.5	3.5	—	3
	1 to 2	TW 15 B	TW 15 BN	50P	44.3	29.8	3.5	—	4
	2 to 2	TW 16 B	TW 16 BN	50P	50.6	29.8	3.5	—	4
600V 20A 2mm ² (AWG14)	1 to 1	TW 20 B	TW 20 BN	50P	40.7	28.8	4.6	—	5
	1 to 2	TW 25 B	TW 25 BN	50P	46.6	29.8	4.6	—	5
	2 to 2	TW 26 B	TW 26 BN	50P	55	29.8	4.6	—	6
600V 30A 5.5mm ² (AWG10)	1 to 1	TW 30 B	TW 30 BN	25P	50	38	6	—	9
600V 50A 8mm ² (AWG8)	1 to 1	TW 50 B	TW 50 BN	10P	65.5	43.9	9.5	—	26
End plate									
1 pair with one each at both sides	For TW10B	TWA 10B		5 pairs	40.3	25.5	Thickness 5.5 ^{Note}		4
	For TW15B	TWA 15B		5 pairs	44.3	29.8	Thickness 5.5 ^{Note}		4.5
	For TW16B	TWA 16B		5 pairs	50.6	29.8	Thickness 5.5 ^{Note}		5.5
	For TW20B	TWA 20B		5 pairs	40.7	28.8	Thickness 6 ^{Note}		4
	For TW25B	TWA 25B		5 pairs	46.6	29.8	Thickness 6 ^{Note}		4.5
	For TW26B	TWA 26B		5 pairs	55	29.8	Thickness 6 ^{Note}		7
	For TW30B	TWA 30B		5 pairs	50	38	Thickness 6 ^{Note}		9
For TW50B	TWA 50B		5 pairs	65.5	43.9	Thickness 6 ^{Note}		11	

Notes:


1. The thickness of end plate indicates the total size of 2 plates at both sides (1 pair).
2. End plate general mass is total of right and left 2 plates (1 pair).

Common unit type


Application		Body color	Type name		Number of contents	External dimensions (mm)				General mass per pole (g)
			With button	Without button		A	B	C	D	
Terminal unit										
600V 10A 1.25mm ² (AWG16)	2 to 2	Brown	TW 16 BC	TW 16 BCN	30P	50.6	29.8	3.5	—	4
		Blue	TW 16 BCB	TW 16 BCBN	30P	50.6	29.8	3.5	—	4
600V 20A 2mm ² (AWG14)	2 to 2	Brown	TW 26 BC	TW 26 BCN	30P	55	29.8	4.6	—	6
		Blue	TW 26 BCB	TW 26 BCBN	30P	55	29.8	4.6	—	6
End plate										
1 pair with one each at both sides	For TW16BC	TWA 16BC		5 pairs	50.6	29.8	Thickness 7 ^{Note}		5.5	
	For TW16BCB	TWA 16BCB		5 pairs	50.6	29.8	Thickness 7 ^{Note}		5.5	
	For TW26BC	TWA 26BC		5 pairs	55	29.8	Thickness 8 ^{Note}		10	
	For TW26BCB	TWA 26BCB		5 pairs	55	29.8	Thickness 8 ^{Note}		10	

Notes:



1. The thickness of end plate indicates the total size of 2 plates at both sides (1 pair).
2. End plate general mass is total of right and left 2 plates (1 pair).



TW15B



TW16BC

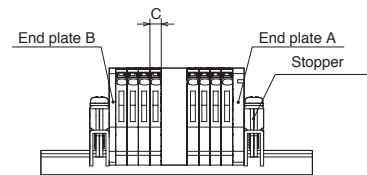


Line-up
Clutch Lock Terminal Blocks
PLC Interface Terminal Blocks
Rail Type Terminal Blocks
Assembly Terminal Blocks
Special Purpose Terminal Blocks
Terminal Accessories

Compact series (rail type) TW and TTW Series


Standard type, Type only for grounding, Type with wire insertion indicator

Application	Type name		Number of contents	External dimensions (mm)				General mass per pole (g)	
	With button	Without button		A	B	C	D		
Terminal unit									
600V 10A 1.25mm ² (AWG16)	1 to 2	TW 15 D	TW 15 DN	50P	49.3	32	3.5	—	5
	2 to 2	TW 16 D	TW 16 DN	50P	58.8	32	3.5	—	6
600V 20A 2mm ² (AWG14)	1 to 2	TW 25 D	TW 25 DN	50P	54.4	37.5	4.6	—	9
	2 to 2	TW 26 D	TW 26 DN	50P	66	37.5	4.6	—	11
600V 30A 5.5mm ² (AWG10)	1 to 2	TW 35 D	TW 35 DN	25P	68.9	38	6	—	15
	2 to 2	TW 36 D	TW 36 DN	25P	85.1	38	6	—	20
600V 20A 2mm ² (AWG14)	1 to 1 x 2	TTW 20 D	TTW 20 DN	20P	69.5	47	4.6	—	14
Type only for grounding 2mm ² (AWG14)	1 to 2	TW 25 DE	TW 25 DEN	10P	55	38.5	4.6	—	13
	1 to 2	TW 25 DEW	TW 25 DENW	10P	55	38.5	5.2	—	13
	2 to 2	TW 26 DE	TW 26 DEN	10P	66	38.5	4.6	—	15
Type with wire insertion indicator 600V 20A 2mm ² (AWG14)	1 to 2	TW 25 F	TW 25 FN	50P	72	38.5	4.6	—	11
End plate									
1 pair with one each at both sides	For TW15D	TWA 15D		5 pairs	49.3	32	Thickness 7 ^{Note}		5
	For TW16D	TWA 16D		5 pairs	58.8	32	Thickness 7 ^{Note}		6
	For TW25D and TW25DE (W)	TWA 25D		5 pairs	54.4	37.5	Thickness 4 ^{Note}		7
	For TW26D and TW26DE	TWA 26D		5 pairs	66	37.5	Thickness 4 ^{Note}		7.5
	For TW35D	TWA 35D		5 pairs	68.9	38	Thickness 6 ^{Note}		9
	For TW36D	TWA 36D		5 pairs	85.1	38	Thickness 6 ^{Note}		11
	For TTW20D	TTWA 20D		5 pairs	69.5	47	Thickness 6 ^{Note}		11
	For TW25F	TWA 25F		5 pairs	72	37.5	Thickness 4 ^{Note}		12




- Notes:
 1. The thickness of end plate indicates the total size of 2 plates at both sides (1 pair).
 2. End plate general mass is total of right and left 2 plates (1 pair).




TW15D



TW26DE

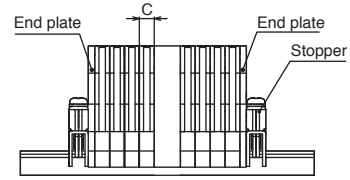

TTW20D



TW25F

Line-up
 Clutch Lock Terminal Blocks
 PLC Interface Terminal Blocks
 Rail Type Terminal Blocks
 Assembly Terminal Blocks
 Special Purpose Terminal Blocks
 Terminal Block Accessories