

TX Assembled terminal block TXM, TXUM and TXWM Series

Stud type (1/2)

No. of pins	Type name	600V, 60mm ² [130A], M8×25 , stud, (With guide)				General mass (g)	600V, 60mm ² [175A], M8×20 , stud				General mass (g)	600V, 100mm ² [240A], M10×30 , stud, (With guide)				General mass (g)		
		A	B	C	D		Type name	A	B	C		D	Type name	A	B		C	D
2	TXWM 100R 02	106	B=76,			375	TXWM 150 02	102	B=76,			365	TXWM 200R 02	116	B=88,			540
3	TXWM 100R 03	136	C=57.5,			505	TXWM 150 03	130	C=52.2,			485	TXWM 200R 03	151	C=62.2,			750
4	TXWM 100R 04	166	D=27			630	TXWM 150 04	158	D=25			605	TXWM 200R 04	186	D=31			960
6	TXWM 100R 06	226				885	TXWM 150 06	214				850	TXWM 200R 06	256				1380
8	TXWM 100R 08	286				1140	TXWM 150 08	270				1090	—	—			—	
9	TXWM 100R 09	316				1265	TXWM 150 09	298				1210	TXWM 200R 09	361				2000
10	TXWM 100R 10	346				1390	TXWM 150 10	326				1330	TXWM 200R 10	396				2210
12	TXWM 100R 12	406				1650	TXWM 150 12	382				1580	TXWM 200R 12	466				2620
15	TXWM 100R 15	496				2030	TXWM 150 15	466				1940	—	—			—	

Remark: With cover and name sticker.


Stud type (2/2)

No. of pins	Type name	600V, 200mm ² [400A], 150mm ² ×2 [400A], M12×35 , stud				General mass (g)
		A	B	C	D	
2	TXWM 400 02	172	B=120,			990
3	TXWM 400 03	234	C=75,			1380
4	TXWM 400 04	296	D=52			1770
6	TXWM 400 06	420				2550


Remark: With cover and name sticker.



TXWM 100R 04



TXWM 150 04



Line-up

Clutch Lock Terminal Blocks

PLC Interface Terminal Blocks

Rail Type Terminal Blocks

Assembly Terminal Blocks

Special Purpose Terminal Blocks

Terminal Block Accessories

TX Assembled terminal block

TXWM-DR and TXWM-DFR Series


Stud branching type (1/2)

No. of pins	Type name	External dimensions (mm)				General mass (g)	Type name	External dimensions (mm)				General mass (g)	Type name	External dimensions (mm)				General mass (g)
		A	B	C	D			A	B	C	D			A	B	C	D	
		600V, Inlet side 60mm ² [130A], M8 Outlet side 22mm ² [90A], M6 8mm ² [50A], M5×2 (With guide)						600V, Inlet side 100mm ² [240A], M10 Outlet side 38mm ² [130A], M8 8mm ² [50A], M5×2 (With guide)						600V, Inlet side 60mm ² [130A], M8 Outlet side 5.5mm ² [40A], M4×4 (With guide)				
2	TXWM 100 DR 02	106	B=76,			420	TXWM 200 DR 02	116	B=88,			625	TXWM 100 DFR 02	106	B=76,			385
3	TXWM 100 DR 03	136	C=58,			570	TXWM 200 DR 03	151	C=62.5,			875	TXWM 100 DFR 03	136	C=58,			525
4	TXWM 100 DR 04	166	D=27			720	TXWM 200 DR 04	186	D=31			1120	TXWM 100 DFR 04	166	D=27			665
5	—	—	—			—	—	—			—	TXWM 100 DFR 05	196	—			805	
6	TXWM 100 DR 06	226	—			1020	TXWM 200 DR 06	256	—			1620	TXWM 100 DFR 06	226	—			945
8	TXWM 100 DR 08	286	—			1320	—	—			—	TXWM 100 DFR 08	286	—			1225	
9	TXWM 100 DR 09	316	—			1460	TXWM 200 DR 09	361	—			2370	TXWM 100 DFR 09	316	—			1360
10	TXWM 100 DR 10	346	—			1610	TXWM 200 DR 10	396	—			2620	TXWM 100 DFR 10	346	—			1505
12	TXWM 100 DR 12	406	—			1910	TXWM 200 DR 12	466	—			3120	TXWM 100 DFR 12	406	—			1780
15	TXWM 100 DR 15	496	—			2360	—	—			—	TXWM 100 DFR 15	496	—			2200	


Remark: With cover and name sticker.

Stud branching type (2/2)

No. of pins	Type name	External dimensions (mm)				General mass (g)
		A	B	C	D	
		600V, Inlet side 100mm ² [240A], M10 Outlet side 8mm ² [50A], M5×4 (With guide)				
2	TXWM 200 DFR 02	116	B=88,			600
3	TXWM 200 DFR 03	151	C=62.5,			830
4	TXWM 200 DFR 04	186	D=31			1085
6	TXWM 200 DFR 06	256	—			1550
9	TXWM 200 DFR 09	361	—			2265
10	TXWM 200 DFR 10	396	—			2520
12	TXWM 200 DFR 12	466	—			2985



TXWM 100DFR03

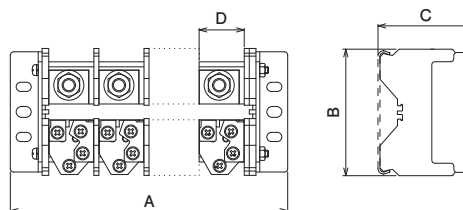

Remark: With cover and name sticker.

Connecting band for TXWM series

Application	Type name	Number of contents
For TXWM100R, TXWM100DR and TXWM100DFR	A type	1 set of 3 P
	B type	
C type		
For TXWM100R, TXWM100DR, TXWM100DFR, TXWM200R, TXWM200DR and TXWM200DFR	A type	1 set of 3 P
	B type	
C type		
For TXWM200R, TXWM200DR and TXWM200DFR	A type	1 set of 3 P
B type		
A type		
For TXM300	A type	1 set of 3 P

Remarks:

1. Type A conforms to the product with the screw height of 24 mm.
2. Type B of TXWJ10 conforms to the product with the screw height of 22 mm or 26 mm. Type B of TXWJ20 conforms to the product with the screw height of 23 mm or 25 mm.
3. Type C is a variant of Type A with the one side screw size changed to M8.

Line-up
Terminal Blocks
Clutch Lock
PLC Interface
Terminal Blocks
Rail Type
Terminal Blocks
Assembly
Terminal Blocks
Special Purpose
Terminal Blocks
Terminal Block Accessories