

APPLICATION INDUSTRY CASES



工程机械行业应用 Construction Machinery Industry Application



TITAN[®]
SERVICE

TITAN SERVICE CO., LTD.

DCH




CE FC

TECHNICAL PARAMETERS OF JOYSTICK G SERIES

Type	G10	G30	G50	G60	G70
Transmitter Function	1 single shaft joystick +10 I/O	3 single shaft joystick +10 I/O	5 single shaft joystick +20 I/O	6 single shaft joystick +20 I/O	7 single shaft joystick +20 I/O
Transmitter Dimensions	293×146×183mm		351×176×183mm		
Transmitter Weight	1300g		2000g		
Transmitter Antenna	Inside				
Receiver Antenna	Outside				
Start	Short press + long press start button				
Emergency	Mushroom conforms to EN3849-1 standard				
Housing	Plastics				
IP class	IP65				
Intelligent Key	DCH iKey				
Distance	≥100 meters				
Temperature	-25℃~+70℃				
Frequency	433-434MHZ				
Button life	≥2,000,000times				
Power supply	2500mA Li-ion battery				
Continuous working time	50 hours (at room temperature)				
Automatic shutdown	15 minutes,30 minutes or no shutdown				
Button Text	Arrow/English/Chinese/Others				
Receiver Output	Relay/Canopen/DP/PWM/DeviceNet/RS485/Modbus/SAE J1939				
Receiver Voltage	30-280VAC,57-528VAC,18-36VDC				

JOYSTICK G SERIES

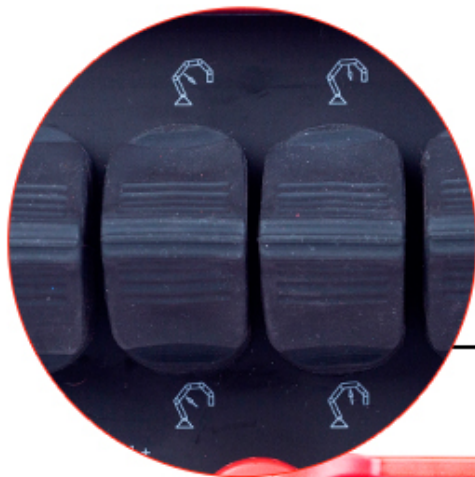

1. Max 8 single axis joystick+20 I/O.



2. Imported key components.






3.PWM output—max current to 1300ma.



4.Max 8 pieces side buttons convenient use.

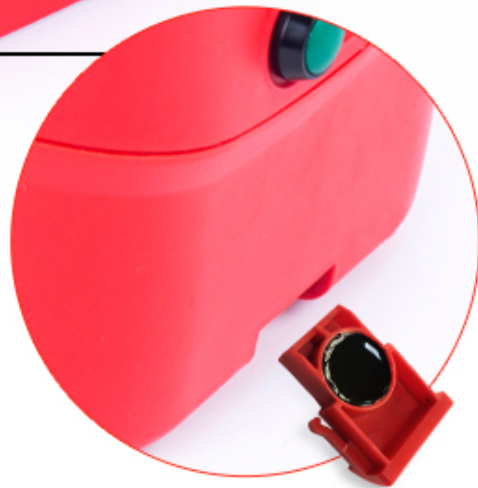

5.DCH iKey can make sure all same models working normally after you change the DCH iKey.