


JIS 10K Gate Valve

10SMS

S.B.I.S.

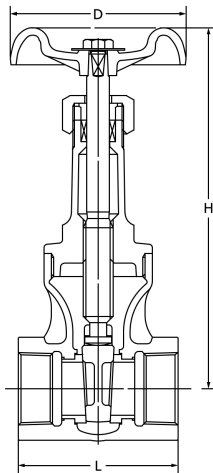

E-E dimension : JIS B 2051

End threads : JIS B 0203

120°C Static water..... 1.4MPa
 220°C Steam, air, gas, oil..... 1.0MPa

● Use for lubricating or hydraulic oil is acceptable. Contact KITZ Corporation for technical advice, if valves are used as heat transfer media.

Materials

Parts	JIS material
Body	FCD-S
Bonnet	FCD-S
Stem	SUS420J2
Disc	SCS1
Body seat ring	SUS403
Gland	SUS403 (1/2" & 3/4" : SUS420J2)
Gland packing	Non Asbestos Packing
Packing nut	FCD-S
Handwheel	FCD450
Wheel nut	SS400
Name plate	A1050P

Dimensions

Size	mm	15	20	25	32	40	50	mm
	inch	1/2	3/4	1	1 1/4	1 1/2	2	
L		60	70	75	85	95	105	
H (open)		150	171	198	233	274	318	
D		60	70	80	90	100	115	