


20K Gate Valve

20SLB

B.B.I.S.

RF-flanged

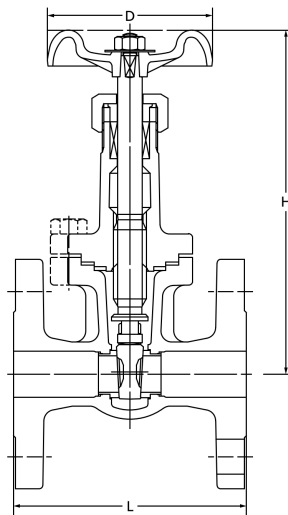

F-F dimension : JIS B 2002 JV 4-4

End flanges : JIS B 2239 20K

120°C Static water..... 2.8MPa

220°C Steam, air, gas, oil..... 2.5MPa

300°C Steam, air, gas, oil..... 2.3MPa

350°C Steam, air, gas, oil..... 2.0MPa

●Use for lubricating or hydraulic oil is acceptable.

Materials

Parts	JIS material
Body	FCD-S
Bonnet	FCD-S
Stem	SUS420J2
Disc	SCS1
Body seat ring	SUS403
Gland	SUS403
Gland packing	Non Asbestos Packing
Handwheel	FCD450-10
Wheel nut	S5400
Bonnet bolt	Carbon Steel
Gasket	Non Asbestos Sheet
Name plate	A1050P

Dimensions

Size	mm	15	20	25	32	40	mm
	inch	1/2	3/4	1	1 1/4	1 1/2	
L		108	117	127	140	165	
H (open)		175	177	214	241	277	
D		90	90	100	115	135	

NOTE : For flange dimensions refer to Page 40.