



20K Globe Valve

20SYBO

B.B.O.S.Y.

RF-flanged

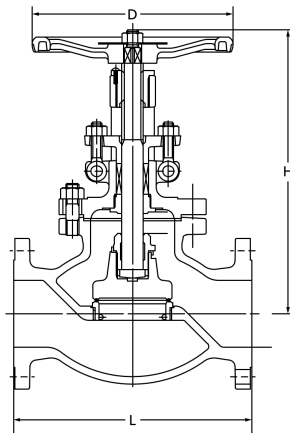

F-F dimension : JIS B 2002
End flanges : JIS B 2239 20K

120°C Static water..... 2.8MPa
220°C Steam, air, gas, oil..... 2.5MPa
300°C Steam, air, gas, oil..... 2.3MPa
350°C Steam, air, gas, oil..... 2.0MPa

● Use for lubricating or hydraulic oil is acceptable. Contact KITZ Corporation for technical advice, if valves are used as heat transfer media.

Materials

Parts	JIS material
Body	FCD-S
Bonnet	FCD-S
Stem	SUS403
Disc	SFVC2A + HF *
Lock nut	FCD-S (8": SUS403)
Body seat ring	SFVC2A + HF* (8": SUS403 + HF*)
Gland	FCD-S
Gland packing	Non Asbestos Packing
Handwheel	FCD400
Wheel nut	S5400
Bonnet bolt /nut	S45C
Gland bolt /nut	Carbon Steel
Yoke bush	C6782BE
Gasket	Non Asbestos Sheet
Name plate	A1050P

* Hard-faced with Co-Cr-W alloy

Dimensions

Size	mm							
	mm inch	50	65	80	100	125	150	200
L		267	292	318	356	400	444	559
H (open)		243	347	382	457	534	593	697
D		225	250	250	300	350	400	560

NOTE : For flange dimensions refer to Page 40.